Request For Proposal (RFP)

For Appointment of Advanced Metering Infrastructure (AMI) Service Provider

For Implementation of Smart Prepaid Metering in Union Territory (UT) of Puducherry

Under Electricity Department, UT of Puducherry



Corporate Office

9th Floor, Statesman House

Barakhamba Road

Connaught Place, New Delhi – 110001

December 3, 2021

Tender Disclaimer

- The information contained in this RFP or subsequently provided to Bidder(s), whether verbally or in documentary or in any other form by or on behalf of PFC Consulting Ltd. ("PFCCL") or any of its employees, Bidders or associates, is provided to Bidder(s) on the terms and conditions set out in this RFP and such other terms and conditions subject to which such information is provided.
- 2. This RFP is not an agreement and is neither an offer nor invitation by PFCCL to the prospective Bidders or any other party. The purpose of this RFP is to provide interested parties with information that may be useful to making their Bid. This RFP includes statements, which reflect various assumptions and assessments arrived at by PFCCL in relation to the Project. Such assumptions, assessments and statements do not support to contain all the information that each Bidder may require. This RFP may not be appropriate for all persons, and it is not possible for PFCCL to consider the technical capabilities, investment objectives, financial situation and needs of each party who reads or uses this RFP. The assumptions, assessments, statements and information contained in this RFP may not be complete, accurate, adequate or correct. Each Bidder should, therefore, conduct its own investigations and analysis and should check the accuracy, adequacy, correctness, reliability and completeness of the assumptions, assessments, statements and information contained in this RFP and obtain independent advice from appropriate sources.
- 3. Information provided in this RFP to the Bidder(s) is on a wide range of matters, some of which depends upon interpretation of law. The information given is not an exhaustive account of statutory requirements and should not be regarded as a complete or authoritative statement of law. PFCCL accepts no responsibility for the accuracy or otherwise for any interpretation or opinion on law expressed herein.
- 4. PFCCL or any of its employees, Bidders or associates make no representation or warranty and shall have no liability to any person including any Bidder under any law, statute, rules or regulations, principles of restitution or unjust enrichment or otherwise for any loss, damages, cost or expense which may arise from or be incurred or suffered on account of anything contained in this RFP or otherwise including the accuracy, adequacy, correctness, completeness or reliability of the RFP and any assessment, assumption, statement or information contained therein or deemed to form part of this RFP or arising in any way in this Bid stage.
- 5. PFCCL or any of its employees, Bidders or associates also accept no liability of any nature whether resulting from negligence or otherwise howsoever caused arising from reliance of any Bidder upon the statements contained in this RFP.
- 6. PFCCL may in its absolute discretion, but without being under any obligation to do so, update, amend or supplement the information, assessment or assumptions contained in this RFP.
- 7. The issue of this RFP does not imply that PFCCL is bound to select a Bidder for the Project and PFCCL reserves the right to reject all or any of the Bidders or Bids or discontinue or cancel the bidding process without assigning any reason whatsoever.
- 8. The Bidder shall bear all its costs associated with or relating to the preparation and submission of its Bid including but not limited to preparation, copying, postage, delivery fees, traveling, food, lodging, expenses associated with any demonstrations

or presentations which may be required by PFCCL or any other costs incurred in connection with or relating to its Bid. All such costs and expenses will remain with the Bidder and PFCCL shall not be liable in any manner whatsoever for the same or for any other costs or other expenses incurred by a Bidder in preparation for submission of the Bid, regardless of the conductor outcome of the Bidding Process.

SUMMARY

PART I - BIDDING PROCEDURES AND REQUIREMENTS

Section 1: Request for Proposals (RFP) Notice

This Section includes Request for Proposals.

Section 2: Eligibility Requirements and Qualification

This Section contains information regarding specific eligibility and qualification requirements applicable for prospective bidders to be considered for further evaluation of their proposal.

Section 3: Instructions to Bidders and Bid Data Sheet

This Section consists of two parts: "Instructions to Bidders" and "Bid Data Sheet". "Bid Data Sheet" contains information specific to selection and corresponds to the clauses in "Instructions to Bidders" that call for selection-specific information. This Section provides information to help prospective bidders prepare their proposals. Information is also provided on submission, opening and evaluation of proposals, selection of successful bidder and award of contract.

Section 4: Bidding Forms - Technical Proposal

This Section includes the forms for Technical Proposal that are to be completed by the prospective bidders and submitted in accordance with the requirements of Section 3.

Section 5: Bidding Forms - Financial Proposal

This Section includes the financial forms that are to be completed by the prospective bidders, including the bidders' costing and pricing, which are to be submitted in accordance with the requirements of Section 3.

Section 6: Project Requirements

This Section describes the background information of the Project, Scope, of Work, System Requirement, Specifications, Quality Requirements, Service Level Agreement (SLA), Standards, Activities and Tasks, Plans, Deliverables, Documentation and other requirements/ details related to and/or connected with the Project.

PART II - CONTRACT FORM AND CONDITIONS OF CONTRACT

Section 7: Contract Form and Conditions of Contract

This Section includes standard contract form. It includes General Conditions of Contract ("GCC") and Special Conditions of Contract ("SCC"). The SCC include clauses specific to this contract to supplement the General Conditions.

PART III – Contract Related Forms

Section 8: Contract Related Forms

This Section includes the form used to notify Award of the Contract to the successful bidder and the form for Performance Security to be furnished by the bidder.

ABBREVIATIONS

1.	AMI	Advanced Metering Infrastructure
2.	ACI	Available Capital for Investment
3.	AMISP	Advanced Metering Infrastructure Service Provider
4.	BG	Bank Guarantee
5.	BIS	Bureau of Indian Standards
6.	BoM	Bill of Material
7.	C&I	Commercial and Industrial
8.	CAIDI	Consumer Average Interruption Duration Index
9.	CAIFI	Consumer Average Interruption Frequency Index
10.	CEA	Central Electricity Authority
11.	CERT-In	Indian Computer Emergency Response Team
12.	CIM	Common Information Model
13.	CIS	Consumer Information System
14.	CMMI	Capability Maturity Model Integration
15.	CPU	Central Processing Unit
16.	CRM	Consumer Relationship Management
17.	СТ	Current Transformer
18.	CUM	Cumulative
19.	CV	Curriculum Vitae
20.	DBFOOT	Design Build Finance Own Operate and Transfer
21.	DBMS	Database Management System
22.	DCU	Data Concentrator Unit
23.	DMZ	Demilitarized Zone
24.	DT	Distribution Transformer
25.	ESB	Enterprise Service Bus
26.	FAT	Factory Acceptance Test
27.	FOR	Freight on Road

28.	GIS	Geographic Information System
29.	GPRS	General Packet Radio Service
30.	GPS	Global Positioning System
31.	GST	Goods and Services Tax
32.	GUI	Graphical User Interface
33.	HES	Head-End System
34.	HHU	Handheld Unit
35.	IBMS	Integrated Building Management Systems
36.	IDS	Intrusion Detection Systems
37.	IEC	International Electrotechnical Commission
38.	IP	Internet Protocol
39.	IPR	Intellectual Property Rights
40.	IS	Indian Standard
41.	ISO	International Organization for Standardization
42.	ISP	Internet Service Provider
43.	IT	Information Technology
44.	IVRS	Interactive Voice Response System
45.	kVA	kilo Volt-Ampere
46.	kW	kilo Watt
47.	LAN	Local Area Network
48.	LCD	Liquid Crystal Display
49.	LED	Light Emitting Diode
50.	LT	Low Tension
51.	M&V	Monitoring and Verification
52.	МСВ	Miniature Circuit Breaker
53.	MD	Maximum Demand
54.	MDAS	Meter Data Acquisition System

55.	MDM	Meter Data Management
56.	MICC	Mineral-Insulated Copper-Clad Cable
57.	NAN	Neighborhood Area Network
58.	NIC	Network Interface Card
59.	NMS	Network Management System
60.	NOMC	Network Operation cum Monitoring Center
61.	NTP	Network Time Protocol
62.	OEM	Original Equipment Manufacturer
63.	os	Operating System
64.	OSF	Open Software Foundation
65	P&L	Profit & Loss
66.	PCI	Payment Card Industry
67.	PLC	Power Line Communication
68.	PLCC	Power Line Carrier Communication
69.	PO	Purchase Order
70.	PON	Power Outage Notification
71.	PRN	Power Restoration Notification
72.	PT	Potential Transformer
73.	PV	Photovoltaic System
74.	QA	Quality Assurance
75.	QC	Quality Control
76.	QR	Qualification Requirement
77.	RAM	Random Access Memory
78.	RDBMS	Relational Database Management System
79.	RF	Radio Frequency
80.	RFP	Request for Proposal
81.	RPO	Recovery Point Objective

82.	RTC	Real Time Clock
83.	RTO	Recovery Time Objective
84.	SAIDI	System Average Interruption Duration Index
85.	SAIFI	System Average Interruption Frequency Index
86.	SAN	Storage Area Network
87.	SAT	Site Acceptance Test
88.	SCADA	Supervisory Control and Data Acquisition
89.	SEBI	Securities and Exchange Board of India
90.	SI	System Integrator OR System Integration
91.	SLA	Service Level Agreement
92.	SNMP	Simple Network Management Protocol
93.	SOA	Service Oriented Architecture
94.	SQL	Structured Queried Language
95.	ТСР	Transmission Control Protocol
96.	TOD	Time of Day
97.	TOU	Time of Use
98.	UDP	User Datagram Protocol
99.	UPS	Uninterrupted Power Supply
100.	VEE	Validation Estimation and Editing
101.	VM	Virtual Machine
102.	VoIP	Voice over Internet Protocol
103.	WAN	Wide Area Network
104.	wo	Work Order
105.	WPC	Wireless Planning & Coordination Wing
106.	XML	Extensible Mark-up Language

TABLE OF CONTENT

\mathbf{P}_{I}	<u>ART I</u>	10
	Section – 1: Request for Proposal Notice	10
	Section – 2: Eligibility and Qualification Requirements	15
	Section – 3: Instructions to Bidders and Bid Data Sheet	25
	Section 4. Bidding Forms- Technical Proposal	86
	Section 5. Financial Proposal - Forms	132
	Section 6. Project Requirements	140
	Section 7. Contract Form and Conditions of Contract	344
	Section 8. Contract Related Forms.	41

PART I

BIDDING PROCEDURES AND REQUIREMENTS

SECTION – 1: Request for Proposal Notice

"Appointment of Advanced Metering Infrastructure (AMI) Service Provider for Implementation of Smart Prepaid Metering in Union Territory (UT) of Puducherry under Electricity Department, UT of Puducherry"

PROCUREMENT NOTICE

(Single Stage Two-Envelope Bidding Process with e-Procurement)

GLOBAL OPEN COMPETITIVE PROCUREMENT

Contract Title: "Appointment of Advanced Metering Infrastructure (AMI) Service
Provider for Implementation of Smart Prepaid Metering in Union
Territory (UT) of Puducherry under Electricity Department, UT of
Puducherry"

Request for Proposal (RFP) Number: Smart_Metering/Puducherry/2021

Issued on: 03.12.2021

- PFC Consulting Ltd. (hereinafter also referred to as 'PFCCL') invites online Proposals for "Appointment of Advanced Metering Infrastructure (AMI) Service Provider for Implementation of Smart Prepaid Metering in Union Territory (UT) of Puducherry under Electricity Department, UT of Puducherry". Bidders are advised to note the clauses on Eligibility & Qualification Requirements in Section-2 and Evaluation Criteria in Section-3 of the RFP Document for evaluation of Proposals.
- 2. Bidding for selection of AMI Service Provider will be conducted through global open competitive procurement.
- 3. The RFP Document is available online on www.nfcclindia.com as well as e-procurement portal www.mstcecommerce.com/eprochome/pfccl from 03.12.2021 to 17.01.2022 on payment of cost of document (Tender Fee) as indicated in the TABLE below. The prospective Bidders would be responsible for downloading the RFP Document and ensuring that any addenda/ corrigendum/ amendment/ clarification thereto available on the website is also downloaded and incorporated.
- 4. The bidding shall be conducted <u>under Single Stage Two-Envelope Bidding</u> process with e-Procurement as specified in Section 3.

- 5. Under the Single Stage Two-Envelope Bidding process, the Bidder shall not quote, disclose or submit its price in the Technical Proposal (First Envelope) or in any other manner, whatsoever, except as part of the Financial Proposal (Second Envelope). In case of any non-compliance in this regard, the Proposal shall be out-rightly / summarily rejected.
- 6. An incomplete and/or ambiguous and/or conditional Proposal and/or Proposal submitted late is liable to be ignored/ summarily rejected.
- 7. Proposal must be submitted online through the e-Procurement/ e-Tendering process specified in Section 3. Any Proposal or modifications to Proposal received outside the e-Procurement system will not be considered, unless otherwise specified in Section 3. Utility shall not be held liable for any delays due to e-Procurement/ e-Tendering system failure beyond its control. Even though the system will attempt to notify the bidders of any bid updates, PFCCL shall not be liable for any information not received by the bidder. It is the bidders' responsibility to verify the website for the latest information related to this RFP.
- 8. Important dates, amounts and other details pertaining to this RFP Notice including submission and opening of proposal, cost of documents/ Tender Fee, address for communication, etc., are given in the TABLE below.
- 9. If Utility office happens to be closed on the specified date of opening of the Proposals, the Proposals/ bids will be opened on the next working day at the same time and venue or as may be notified by Utility.
- 10. Other details can be seen in the RFP document.

TABLE-Important Dates, Amounts and Other Details

Dates

S.No	Particulars		Date	Time
a)	Commencement of downloading of this RFP and e-bidding	•••	03.12.2021	18:00 hrs
b)	Bidders to send interest to PFCCL for participation in Pre-bid meeting	• •	16.12.2021	18:00 hrs
c)	Pre-bid meeting through Video Conference (VC)	••	20.12.2021	15:00 hrs
d)	Last Date of receiving Queries from bidders	• •	23.12:2021	18:00 hrs
e)	Last Date of downloading of RFP		17:01:2022	11:00 hrs
f)	Last date for e-bidding		17.01.2022	15:00 hrs
g)	Last date for receipt of RFP		17.01.2022	15:00 hrs
h)	Bid Opening	:	17.01.2022	16:00 hrs
i)	Opening of Financial Bid	:	To be intimated later	To be intimated later

Amounts for Bidding

A.	Tender Fee to be submitted with the RFP (Non- Refundable)	:	INR 1,00,000 plus GST @18%
B.	Transaction Fee (Non- Refundable)	:	INR 15,000 plus GST @18%
C.	Bid Security (Refundable)	:	INR 6,00,00,000

Other Details

A.	Address for Communication including Contact details:				
	Name Sh. Anupam Kashyap				
	Designation Chief Manager				
		Address 7 th Floor, A-Wing, Statesman House, Connaught			
			Place, New Delhi – 110 001		
		Tel	011-23443712		
		Email	anupam_kashyap@pfcindia.com		

- B. Payment of cost of document/ Tender Fee:
 - Tender Fee shall be made in the form of A/C payee demand draft in favour of PFC Consulting Ltd. or RTGS payable at New Delhi drawn on any Scheduled Commercial Bank.
 - 2. Tender Fee (or its receipt in case of RTGS payment) and Bid Security must be submitted in physical form in a sealed envelope at address given above, before the Bid Submission Deadline. The sealed envelope shall be clearly marked on the top as "Tender Fee for Appointment of Advanced Metering Infrastructure (AMI) Service Provider for Implementation of Smart Prepaid Metering in Union Territory (UT) of Puducherry under Electricity Department, UT of Puducherry." The sealed envelope shall also clearly mention the name of the Lead Consortium Member/ Sole Bidder submitting the Bid, as further detailed in Section 3.
 - Any Bid not accompanied by a Tender Fee as above shall be rejected by PFCCL as nonresponsive.
 - 4. Tender Fee is non-refundable
- C. Other Payments or Bank Guarantees for the RFP/ Contract shall be as per the terms and conditions defined in this RFP Document

Section – 2: Eligibility and Qualification Requirements

- 1. The Bid can be submitted by a Sole Bidder as an individual entity or a Consortium of firms/companies (specific requirements for Consortium are given under Clause 2 below) who are eligible to participate in tenders for public procurement in India in accordance with Applicable Laws including the guidelines issued in Order No. F/No.6/18/2019-PPD by Ministry of Finance, Department of Expenditure, Public Procurement Division dated 23 July 2020 and Order No. 11/05/2018-Coord. by the Ministry of Power dated 17 September 2020 including any amendments or modifications to the same from time to time.
- 2. If at any stage of the bidding, any order/ ruling is found to have been passed in the last 1 (one) year preceding the Bid submission deadline by a competent Court of Law or any appropriate Commission or any Arbitral Tribunal against the Sole Bidder/ Lead Bidder/ any Consortium Members or its Affiliates for breach of any Contract awarded by any Government agency/department, then Bids from such Bidders shall be liable to be rejected. All Bidders shall confirm in accordance to Form 7 given in Section 4 that no such order(s)/ ruling(s) have been passed by a competent Court of Law or an appropriate Commission against it or its Affiliates. In case of any such order/ ruling, it is the duty of the Bidder to inform Utility for the same during the Bid submission.
- Technically qualified Bidders shall continue to maintain compliance with the Eligibility and Qualification Requirements specified herein. Failure to comply with the aforesaid requirements shall make the Bid from such Bidders liable for rejection at any stage of the bidding process

4. Eligibility Requirements for Consortium

- 4.1 Members of the Consortium shall enter into a binding Consortium Agreement, in the form specified at Form 8 (the "Consortium Agreement") given in Section 4 of RFP Document, for the purpose of submitting Bid. The Consortium Agreement, to be submitted along with the Bid, shall, *inter alia*:
 - a) convey the intent to comply with the terms and conditions of the AMISP Contract in the event selected to undertake the Project; and
 - b) clearly outline the proposed roles and responsibilities, if any, of each member.
- 4.2 In the event, Selected Bidder is a Consortium, the members of the consortium shall be required to form an appropriate Special Purpose Vehicle, incorporated under the Companies Act 2013 (the "SPV"), to execute the AMISP Contract and implement the Project. In such a case, the Selected Bidder shall comply with the following requirements:
- 4.2.1 The members of the consortium shall ensure that they subscribe to 100% of the equity share capital of the SPV. The members of the Consortium shall hold shares in accordance with the shareholding pattern indicated in the Consortium Agreement for a period up to two years after the Installation Milestone;

- 4.2.2 The members of the consortium shall continue to hold not less than 51% for the entire term of the AMISP Contract:
- 4.2.3 The Lead Consortium Member shall hold at least 51% (fifty-one per cent) of the equity of the SPV at all times until the two years from Installation Milestone as per the AMISP Contract and 26% for the remaining term of the AMISP Contract.
- 4.2.4 If equity is held by the Affiliates, Parent Company Or Ultimate Parent Company, then subject to this Clause, such Affiliate, Parent Company or Ultimate Parent Company shall be permitted to transfer its shareholding in the SPV to another Affiliate or to the Parent Company / Ultimate Parent Company. If any such shareholding entity, qualifying as an Affiliate / Parent Company / Ultimate Parent Company, is likely to cease to meet the criteria to qualify as an Affiliate / Parent Company / Ultimate Parent Company / Ultimate Parent Company.

Provided that in case the Lead Member or Sole Bidder is holding equity through Affiliate's, Ultimate Parent Company or Parent Company, such restriction shall apply to such entities.

Provided further, that the aggregate equity share holding of the Bidding Consortium or a Sole Bidder in the issued and paid up equity share capital of the SPV shall not be less than hundred percent (100%) up to a period of two (2) years after Installation Milestone and the lead Consortium Member shall have the equity share holding not less than fifty one percent (51%). In case the Selected Bidder is a Bidding Consortium, then any Member (other than the Lead Member) of such Bidding Consortium shall be allowed to divest its equity as long as the other remaining Members (which shall always include the Lead Member) hold the minimum equity specified above.

- 4.2.5 The Selected Bidder may invest in the equity share capital of the SPV through its Affiliate(s) or Ultimate Parent Company or Parent Company. Details of such investment will have to be specified in the Technical Bid of the RFP. If the Selected Bidder so invests through any Affiliate(s) or Ultimate Parent Company or Parent Company, the Selected Bidder shall be liable to ensure that minimum equity holding/lock-in limits as specified in Clause 4.2 above and as computed as per the provisions of Clause 4.2.6 of this section are still maintained.
- 4.2.6 For computation of effective Equity holding, the Equity holding of the Selected Bidder or its Ultimate Parent Company in such Affiliate(s) or Parent Company and the equity holding of such Affiliate (s) or Ultimate Parent company in the SPV shall be computed in accordance with the example given below:

If the Parent Company or the Ultimate Parent Company of the Selected Bidder A directly holds thirty percent (30%) of the equity in the then holding of Selected Bidder A in the SPV shall be thirty percent (30%);

If Selected Bidder A holds thirty percent (30%) equity of the Affiliate and the Affiliate holds fifty percent (50%) equity in the SPV, then for the purposes of ascertaining the minimum equity/equity lock-in requirements specified above, the effective holding or Bidder A in the SPV shall be fifteen percent (15%). (i.e., 30%*50%);

- 4.3 Every Consortium Member shall provide consent to the Lead Consortium Member and make itself aware of all the proceedings of the bidding process and Project implementation through legally enforceable Consortium Agreement, power of attorneys, legal undertakings, etc. (if applicable) entered amongst all members of that Bidding Consortium including but not limited to those as prescribed in Form 8, Form 9 and Form 11 given in Section 4. In the absence of duly executed formats, the Bid shall not be considered for evaluation and shall be rejected.
- 4.4 The Lead Consortium Member shall be liable for the execution of the entire obligation in the AMISP Contract in accordance with the terms and conditions thereof. Only the Lead Consortium Member shall have the authority to conduct all businesses for and on behalf of the Consortium during the bidding process.
- 5. The Bidder, individual entity in case the participating in the bidding as Sole Bidder, or as a Consortium Member or as Lead Consortium Member in case participating in the bidding as Bidding Consortium, and its Sub-Contractor(s) should not be blacklisted by any Govt. Organization or regulatory agencies or Govt. Undertaking as on the date of submission of the Bid. Bidder should submit a self- undertaking signed by its authorized signatories for the same as per the format prescribed in Form 7 given in Section 4.
- 6. The Lead Consortium Member/ Sole Bidder shall submit the Bid after submitting the Tender Fees and Bid Security as per the various terms, schedules and formats prescribed in this RFP. Further, The Lead Consortium Member shall be the point of contact for the Consortium during the Bid process before award of the Project to the AMISP, and PFCCL shall communicate directly to the contact person appointed through the Power of Attorney as per Form 10 given in Section 4.
- 7. The Bidder may seek qualification on the basis of technical and financial capability of its Parent(s) and/ or its Affiliate(s) as defined in section 3 for the purpose of meeting the qualification requirements. Authorization for use of such technical or financial capability shall have to be provided from its Parent(s) and/or Affiliate(s). The technical and financial capability of a particular entity, including its Parent(s) and/or Affiliate(s), shall not be used by more than one Bidder.
- 8. The determination of the relationship of Parent(s) and/or Affiliate(s) with the Bidder shall be on the date 7 (seven) Days prior to the Bid Submission Deadline. Documentary evidence to establish such relationship shall be furnished by the Bidder along with the Technical Bid.

If the Technically Evaluated Entity and/or Financially Evaluated Entity is an entity other than the Sole Bidder or a Member in a Bidding Consortium, the Sole Bidder or Member relying on such Technically Evaluated Entity and/or Financially Evaluated Entity will have to submit a legally binding undertaking supported by a board resolution from the Technically Evaluated Entity and/or Financially Evaluated Entity or its Ultimate Parent Company, that all the equity investment obligations of the Sole Bidder or the Member of the Consortium shall be deemed to be equity investment obligations of the Technically Evaluated Entity and/or Financially Evaluated Entity or its Ultimate Parent Company, and in the event of any default the same shall be met by such evaluated entity or by or the Ultimate Parent Company. The Sole Bidder or the Consortium Member shall have to provide information and documents relating to its relationship with such Technically Evaluated Entity and or Financially Evaluated Entity including details about the equity shareholding between them as per Form 16 provided in Section 4.

The Technically Evaluated Entity may be the Sole Bidder or the Lead Member of a Consortium or an Affiliate or Parent of such Sole Bidder or the Lead Member, as the case may be.

The Qualified Bidder(s) will be required to continue to maintain compliance with the Qualification Requirements throughout the bidding process and till execution of the AMISP Contract. Where the Technically Evaluated Entity and/or the Financially Evaluated Entity is not the Sole Bidder or a Member in a Bidding Consortium, as the case may be, the Sole Bidder or Member shall continue to be an Affiliate of the Technically Evaluated Entity and/or Financially Evaluated Entity till the execution of the AMISP Contract. Failure to comply with the aforesaid provisions shall make the Bid liable for rejection at any stage.

8. Qualification Requirements

8.1 The technical and financial requirements of qualification are as follows:

S.No	Description	cturer/ Supplier can participate as a Consortium Member only in one (1) Con Qualifying Criteria	Evaluation Documents Required
1	Technical Experience	a) The Bidder or any Consortium Member must have 1. Manufactured and supplied minimum 50,000 nos. (cumulative) AMI Meters and successfully integrated with its own or Third Party software and with the existing system of Indian/ Global Power Distribution Utility(ies) in the last 5 years (i.e. FY 2016-17 onwards) till the date of submission of bid Or Manufactured and supplied minimum 50,000 nos. (cumulative) AMR Meters along with required hardware, software & other associated accessories etc. and successfully integrated with its own or Third Party software and manufactured and supplied minimum 50,000 nos. (cumulative) Pre-payment Meters as per IS 15884 to Indian/ Global Power Distribution Utility(ies) in the last 5 years (i.e. FY 2016-17 onwards) till the date of submission of bid The Bidder/ Consortium Member claiming Global experience must bid through a company incorporated under Companies Act in India	
		 b) The Bidder/ Consortium Member must have manufacturing facility in India with an in-house NABL accredited lab on the date of submission of bid. The Bidder/ Consortium Member claiming Global experience must supply the meters against this RfP from the manufacturing facility in India 	Valid Registration Certificate of Manufacturing Unit and details of facility Valid NABL Accreditation Certificate as mentioned in this clause.
2	Quality Certification	a) The Bidder/ Consortium Member should be ISO 9001:2015 certified OR Bidder should have CMMI Level 3 (minimum) certification.	 i. For S.No. 2(a) - A valid ISO 9001:2015 / CMMI Level 3 (minimum) certificate on or before the date of submission of bid ii. For S.No. 2(b) - A valid ISO 14001 and OHSAS18001/ OHSAS45000 series certificates on or before the date of submission of bid
		ations Network Provider (CNP) (Any Bidder can use credentials of same C in participate as a Consortium Member only in one (1) Consortium and in s	NP as a Sub-Contractor for meeting Qualifying Requirement. However, the uch a case, the CNP cannot be a Sub-Contractor of any other Bidder)
S.No.	Description	Qualifying Criteria	Evaluation Documents Required
1.	Technical Experience	implemented in project(s) with at least 50,000 Association (This is	orporation and Registration certificate along with Memorandum & Articles of some required to be submitted only if the CNP is a Bidder or part of the Consortium). The Order (PO)/ Work Order (WO) indicating client name, scope of work, period of

			icate from client on successful implementation and operation of the project ad agreements/ MoUs for integration of NIC module or Certificate of successful integration
2	Quality Certification	should have CMMI Level 3 (minimum) of subscriptication. b) CNP should have ISO 27001 and ISO 14001 submoderifications. Bids.	S.No. 2(a) - A valid ISO 9001:2015 / CMMI Level 3 (minimum) certificate on or before the date omission of bid S.No. 2(b) - A valid ISO 14001 and ISO 27001 certificates (a) on or before the date of ission of bid or (b) before completion of Evaluation of Technical bids and Opening of Financial
			dentials of same SI as a Sub-Contractor for meeting Qualifying Requirement. However, rtium and in such a case, the SI cannot be a Sub-Contractor of any other Bidder)
S.No.	Description	Qualifying Criteria	Evaluation Documents Required
1	Technical Experience of Integration with MDM	Power Distribution Utility(s) in the last 5 years (i.e. FY 2016-17 onwards) till the date of submission of bid.	 i. Certificate of Incorporation and Registration certificate along with Memorandum & Articles of Association (This is required to be submitted only if the SI is a Bidder or part of the Consortium) ii. Contract/ Purchase Order (PO)/ Work Order (WO) indicating client name, scope of work, period of work etc. iii. Certificate from the client on successful implementation and operation of the project. iv. In case SI is a Power Distribution Utility which is having an in house experience, it should submit documentary evidence of such experience with self-certification from authorized signatory of System Integrator.
			e CSP as a Sub-Contractor for meeting Qualifying Requirement. However, the CSP, if in such a case, the CSP cannot be a Sub-Contractor of any other Bidder.)
S.No.	Description	Qualifying Criteria	Evaluation Documents Required
1	Technical Experience as Cloud Service Provider	a) CSP must be Empanelled Cloud Service Provider by MEITY (Ministry of Electronics and Information Technology) for Public cloud, Virtual Private Cloud and Community Government Cloud b) CSP Member must have at least 3 Data Centers in at least two different seismic zones in India	 i. Certificate of Incorporation and Registration certificate along with Memorandum & Articles of Association (This is required to be submitted only if the CSP is a Bidder or part of the Consortium) ii. For S.No (a), Bidder should provide valid certificates iii. For S.No (b), (c) and (d), Bidder should submit self-experience certificate duly signed by the Authorized Signatory who is authorized to sign the Bid document iv. For S.No. (e), Contract/ Purchase Order (PO)/ Work Order (WO) indicating client name, scope of work, period of work etc.

		date of submission of bid.		
	Certification	f) CSP should have the following Quality Certifications: i. ISO/IEC 27001 certified for Information Security with well-planned and structured escalation procedures ii. Certified ISO/IEC 20000-1 for DC service quality and delivery iii. The data centers where cloud servers of CSP are hosted should be certified for minimum of Tier III level against TIA-942 specifications iv. Must have Government Community Cloud running audited and successfully audited by STQC.		or before the date of submission of bid.
D. Q	R For Meter Dat	a Management Provider (MDMP) (Any Bidder can use crede	entials of same MDM	P as a Sub-Contractor for meeting Qualifying Requirement. However,
			onsortium and in suc	h a case, the MDMP cannot be a Sub-Contractor of any other Bidder)
S. No.	Description	Qualifying Criteria a) The MDMP should have successfully implemented and		Evaluation Documents Required
'	Data handling Capability	integrated with HES for at-least 50,000 (cumulatively) numbers of smart meter/ AMI system and AMR system (managing 15/30 minutes interval data) out of which at-least 10% (i.e. at least 5,000 numbers cumulatively) should be of smart meter/ AMI system in any Indian/ Global Power Distribution Utility) in the last 5 years (i.e. FY 2016-17 onwards) till the date of submission of bid.	of Association (*Consortium) ii. Contract/ Purch period of work e	corporation and Registration certificate along with Memorandum & Articles This is required to be submitted only if the MDMP is a Bidder or part of the ase Order (PO)/ Work Order (WO) indicating client name, scope of work, etc. client on successful implementation and operation of project.
2	Ease of integration with HES/MDAS and Billing	a) The Proposed MDM should have been integrated with minimum 3 different Head End Systems/ MDAS system and 2 different billing system in any Indian/ Global Power Distribution Utility in the last 5 years (i.e. FY 2016-17 onwards) till the date of submission of bid.	period of work e ii. Client Certificate	e on successful implementation and operation of project.
3	Quality Certificati on	a) The MDMP should be a 9001:2015 or CMMI Level 3 (minimum) certified. b) MDMP should have ISO 27001 certification	the date of subn	A valid ISO 9001:2015 / CMMI Level 3 (minimum) certificate on or before hission of bid A valid ISO 27001 certificate on or before the date of submission of bid
E.	QR - Financial C	riteria		
S.No.	Description	Qualifying Criteria		Evaluation Documents Required
1	Financial Requirement	The Bidder shall have positive net worth for each of the years. The Net worth of the Bidder should be at least IN the last three Financial Years (i.e. 2018-19 onwards) Or Bidder shall have a minimum ACI of INR 89 crore at the cifinancial year	R 89 crore in any of	Audited Annual financial statements, Balance Sheet and P&L Account for the respective financial years as per the format prescribed in Form 12 given in Section 4.

[Net Worth means sum total of the paid up capital and free reserves (excluding reserves created out of revaluation) reduced by aggregate value of accumulated losses (including debit balance in profit and loss account for current year) and intangible assets.].

[ACI means minimum investible funds (i.e., immediately available funds for investment and callable capital) subject to the limits of investment in a single investee entity (in the relevant jurisdiction for a Foreign Investment Fund, or the maximum permissible investment limit for an AIF) (as per the SEBI (AIF) Regulations, 2012, as may be amended from time to time), as applicable].

Please note:

In case a Bidder and/(or) it's Parent(s)/ Affiliate(s) has issued any fresh
equity capital during the current financial year, the same shall be permitted
to be added to the Bidder's Net Worth subject to the statutory auditor of the
Bidder certifying to this effect.

In case a Bidder and/(or) it's parent(s)/ Affiliate(s), being a SEBI registered AIF or Foreign Investment Fund, has received any fresh capital commitment available for the immediate deployment during the current financial year, the same shall be permitted to be added to the Bidder's ACI subject to the statutory auditor of the Bidder certifying to this effect.

Bidders can use credentials of the Sub-Contractors for meeting the Qualifying Requirement. However, multiple bidders can use credentials of the same Sub-Contractors subject to the condition that a Sub-Contractor cannot participate as Bidder/ Consortium Member in the bid process. The bidder has to submit detailed roles & responsibilities of the Consortium Members/ Sub-Contractor partners to PFCCL along with the bid

8.2. Deleted

- **8.3.** For the purposes of satisfaction of Financial Requirement, the following shall apply:
 - a. In the event Bidder is a Consortium, the financial requirement shall be met individually and collectively by all the Members in the Bidding Consortium. The financial requirement to be met by each Member of the Bidding Consortium shall be computed in proportion to the shareholding pattern indicated in the Consortium Agreement [or equity commitment made by each of them for investment in the Project]
 - b. The Lead Consortium Member/ Lead Bidder shall meet not less than 51% of the minimum financial requirement criteria given at clause no.8.1.3 above;
 - c. While, each of the other Consortium Member(s) individually shall meet not less than 10% of the minimum financial requirement criteria given at clause no. 8.1.3 above;

8.4 Tender Evaluation Methodology

S.No	Description	Qualifying Criteria	Max Score
1	Manpower Experience	Strength of the team proposed for undertaking the assignment including the qualification, experience and time proposed on field as well as on support & maintenance. (Bidders need to provide names of the team members proposed to be deployed along with their relevant experience and Curriculum Vitae signed by the respective person and counter signed by the Authorized Signatory signing the Bid. PFCCL/ Utility may ask for suitable substitution in place of the proposed manpower, if it is found that the manpower is not suitable as per the requirements of the assignment)	20
2	Meter Manufacturing Experience	The Bidder or any Consortium Member must have: a. Manufactured and supplied minimum 50,000 nos. (cumulative) AMI Meters and successfully integrated with its own or Third Party software and with the existing system of Indian/ Global Power Distribution Utility(ies) in the last 5 years (i.e. FY 2016-17 onwards) till the date of submission of bid Or Manufactured and supplied minimum 50,000 nos. (cumulative) AMR Meters along with required hardware, software & other associated accessories etc. and successfully integrated with its own or Third Party software and manufactured and supplied minimum 50,000 nos. (cumulative) Pre-payment Meters as per IS 15884 to Indian/ Global Power Distribution Utility(ies) in the last 5 years (i.e. FY 2016-17 onwards) till the date of submission of bid	15
3	Experience in Integration with MDM	The System Integration (SI) must have experience of integration of HES with MDM on standard interfaces and data exchange models (CIM/XML/ IEC 61968 or any other open standard)) for at least 50,000 consumers (cumulatively) in Indian/ Global Power Distribution Utility(s) in the last 5 years (i.e. FY 2016-17 onwards) till the date of submission of bid.	10
4	Experience as Cloud Service Provider	Cloud Service Provider (CSP) should have at least two (2) work orders from Central Government / State Government / PSU /Semi- Government of India in last 5 years (i.e. FY 2016-17 onwards) (In case the Bidder is proposing more than one CSP, then marking would be done based on experience of that CSP which has lower no. of work orders)	10
5	Experience in Communication	The Communications Network Provider's (CNP's) RF Mesh should have been implemented in project(s) with at least 25,000 (cumulatively) communication module/ endpoints involving Radio Frequency (RF) mesh in Indian/ Global Power Distribution Utility(ies) in the last 5 years (i.e. FY 2016-17 onwards) till the date of submission of bid	10
6	Experience as Meter Data Management (MDM) Provider	Meter Data Management Provider (MDMP) should have successfully implemented and integrated with HES for at-least 50,000 (cumulatively) numbers of smart meter/ AMI system and AMR system (managing 15/30 minutes interval data) out of which at-least 10% (i.e. at least 5,000 numbers cumulatively) should be of smart meter/ AMI system in any Indian/ Global Power Distribution Utility in the last 5 years (i.e. FY 2016-17 onwards) till the date of submission of bid	10
7	Approach & Methodology	Bidder to submit a brief on Approach & Methodology for executing the Project	10
8	Financial Criteria	The Bidder shall have positive net worth for each of the last three financial years. The Net worth of the Bidder should be at least INR 89 crore in any of the last three Financial Years (i.e. 2018-19 onwards) Or Bidder shall have a minimum ACI of INR 89 crore at the close of the preceding financial year	15
		Total	100

The bidders scoring more than 70 marks out of 100 shall qualify for the next stage of evaluation

Section 3. Instructions to Bidders and Bidders Section – 3: Instructions to Bidders and Bid Data Sheet

TABLE OF CONTENT

Α.	General Provisions	27
1.	Definitions	7
2.	Introduction3	2
3.	Conflict of Interest	5
4.	Bidders to Inform Itself Fully3	6
5.	Fraud and Corruption3	7
6.	Eligibility and Qualification Requirements	7
В.	Preparation of Proposals	38
7.	General Considerations and Instructions	8
8.	Cost of Bidding / Preparation of Proposal	9
9.	Language4	0
10	. Documents Comprising the Proposal and List of Forms4	0
11	Only One Proposal4	0
12	.Proposal / Bid Validity & Bid Security4	0
13	.Clarification and Amendment of RFP4	2
14	.Preparation of Bid/ Proposal and Bid Formats4	3
15	.Technical Bid/ Proposal Format and Content4	4
16	.Financial Bid/ Proposal Format and Content4	8
C.	Submission, Opening and Evaluation	50
17	.Submission of Bids/ Proposals and Bid Submission Deadline5	0
18	.Confidentiality5	2
19	.Opening of Technical Bids/ Proposals5	2
20	.Bid/ Proposals Evaluation Overview and Verification/ Clarifications5	3
21	. Evaluation of Technical Bids/ Proposals5	5
22	Opening of Financial Proposals5	6
23	.Evaluation of Financial Bids/ Proposals5	6
24	. Deviations, Reservations and Omissions5	6
25	Successful/Selected Bidder5	7

D. Award of Contract	57
26. Award Criteria	57
27. Utility's Right to Vary Quantities at the time of Award	58
28.Letter of Award	58
29. Signing of Contract and Contract Performance Security	59
E. Bid Data Sheet	59
Annexure I (BDS)	70
PART II	
A. Form of Contract	346
B. Form of Contract	346
II. General Conditions of Contract	353
III. Special Conditions of Contract	404
PART III	411
Contract Related Forms	412

Instructions to Bidder

A. General Provisions

1. Definitions

1.1 Definitions

- (a) "Affiliate" shall mean a company or AIF or Foreign Investment Fund that either directly or indirectly:
 - i. controls or
 - ii. is controlled by or
 - iii. is under common control with
 - a Bidder and "control" mean ownership by one company or AIF or Foreign Investment Fund of 26% of the voting rights of the other company or AIF or Foreign Investment Fund, as the case may be;
- (b) "Alternative Investment Fund" or "AIF" " shall have the meaning as ascribed to the term 'alternative investment fund' under Regulation 2(1)(b) of the Securities and Exchange Board of India (Alternative Investment Funds) Regulations, 2012 (as may be amended from time to time)
- (c) "ACI" shall mean minimum investible funds (i.e. immediately available funds for investment and callable capital, net of estimated expenditure for administration and management of the fund) subject to the limits of investment in a single investee entity (in the relevant jurisdiction for a Foreign Investment Fund, or the maximum permissible investment limit for an AIF) (as per the Securities and Exchange Board of India (Alternative Investment Funds) Regulations, 2012, as may be amended from time to time).

In case of an AIF or Foreign Investment Fund using ACI, ACI would be considered as per the certificate issued by statutory auditor (or such other certificate as filed with the regulator in the relevant jurisdiction) not older than 1 (one) months prior to the date of Bid Submission;

(d) **Deleted**:

(e) "AMISP Contract" or "Contract" shall mean the Contract to be entered into between the Selected Bidder in the event the Selected Bidder is an individual entity, Lead Bidder in the event the

Selected Bidder is a Consortium and the SPV, incorporated by the Selected Bidder in the event formation of SPV is mandatory/ opted and permitted as per **Bid Data Sheet** ¹ and PFCCL for undertaking the Project;

- (f) "Bid" shall mean the bid submitted by a Bidder(s) in response to this RFP and shall include the Technical Bid and the Financial Bid:
- (g) "Bidder(s)" shall mean individual entity or Consortium of entities bidding in response to this RFP. The Bidder can either be a company incorporated under the applicable laws of their relevant jurisdiction or an AIF or a Foreign Investment Fund:
- (h) "Bidding Consortium" shall mean the Consortium of entities bidding for Project after executing Consortium Agreement as per the terms and conditions of this RFP:
- (i) "Bid Data Sheet (BDS)" means an integral part of the Instructions to Bidders (ITB) Section 3, that is used to reflect issues, details and conditions specific to the procurement, to supplement and/or modify the provisions of ITB.
- (j) "Bid Submission Deadline" shall have the meaning as ascribed thereto in ITB 17.5;
- (k) "Conflict of Interest" shall have the meaning as ascribed thereto in ITB 3:
- (I) "Consortium Member" shall mean any Member of the Bidding Consortium other than the Lead Consortium Member;
- (m) "Contractor" shall mean the same as "AMISP";
- (n) "Contract Price" shall have the meaning as ascribed thereto in Section 7:
- (o) **Day"** means a calendar day, unless otherwise specified as "**Business Day"**. A Business Day is

-

¹ Lead Bidder in the event the Selected Bidder is a Consortium

- any day that is an official working day of PFCCL. It excludes PFCCL's official public holidays.
- (p) "Financial Bid" shall have the meaning as ascribed thereto in ITB 16;
- (q) "Financially Evaluated Entity" shall mean the company which has been evaluated for the satisfaction of the financial requirement set forth in Clause 8 of Section 2:
 - (r) "Financial Proposal" shall mean the same as Financial Bid;
 - (s) "Financial Year" or "FY" shall mean the period starting from 1st April of a calendar year to 31st March of the consecutive calendar year;
 - (t) "Foreign Investment Fund" shall mean any pooled investment vehicle or investment fund which is registered or recognized with a securities market/banking regulator of a "foreign jurisdiction";
 - (u) "Foreign Jurisdiction" means a country, other than India, whose securities market regulator is a signatory Organization Securities International of Commission's Multilateral Memorandum of Understanding (IOSCO's MMOU) or a signatory to bilateral Memorandum of Understanding with the Securities and Exchange Board of India, and which is not identified in the public statement of Financial Action Task Force as a jurisdiction having a strategic Anti-Money Laundering or Combating the Financing of Terrorism deficiencies to which counter measures apply or a jurisdiction that has not made sufficient progress in addressing the deficiencies or has not committed to an action plan developed with the Financial Action Task Force to address deficiencies and are allowed to make investment India in terms of applicable law;
 - (v) "ITB" (this Section 3 of the RFP) means the Instructions to Bidders that, along with other Sections, provides the Bidders with all information needed to prepare their Proposals.
 - (w) "Lead Consortium Member" or "Lead Bidder"

shall mean the Member of the Bidding Consortium, designated as such by the other members of the Consortium, having authority to represent all the members before PFCCL;

- (x) Deleted;
- (y) "Month" shall mean calendar months unless otherwise specified.
- (z) "Operational Go-live" shall have the meaning as ascribed thereto in Clause 9.6 of Section 6 of the RFP Document;
- (aa) "Parent(s)" shall mean a Company or an AIF or a Foreign Investment Fund that holds at least twenty six percent (26%) of the paid - up equity capital directly or indirectly in the Bidder, as the case may be;
- (bb) "Project" shall mean the PFCCL's AMI Project defined in Clause 1 of Section 6 of the RFP Document;
- (cc) "Proposal" shall mean the same as Bid and shall include the Technical Proposal and the Financial Proposal;
- (dd) "Request for Proposal" or "RFP" means this Tender of which the number, name and details have been mentioned in Bid Data Sheet, including all its Volumes/ Sections/ Forms/ Annexures/ Appendices etc., for Appointment of AMISP (including all clarification/ addendum/ amendment/ corrigendum/ etc. issued from time to time);
- (ee) "RFP Document" shall have the same meaning as ascribed thereto in ITB 2.1 and ITB 2.1.1
- (ff) "Service(s)" or "Related Service(s)" shall mean any Service(s) performed or to be performed as a part of the Project by the AMISP;
- (gg) "Special Purpose Vehicle" or "SPV" shall mean a company incorporated under Companies Act, 2013 for the purpose of executing the Project as set out in Clause 1 of Section 6:

- (hh) "Sub-Contractor" shall mean any person, natural or legal, including manufacturers, to whom execution of any part of the AMISP Contract, including preparation of any design or supply of the AMI Project, is sub-contracted directly or indirectly by the Contractor, and includes its legal successors or permitted assigns;
- (ii) "**Technical Bid**" shall have the meaning as ascribed thereto in **ITB 15**:
- (jj) "Technical Proposal" shall mean the same as Technical Bid;
- (kk) **Technically Evaluated Entity**" shall mean the company which has been evaluated for the satisfaction of the technical requirement set forth in Clause 8 of Section 2:
 - (II) "Tender" shall mean the same as "RFP";
 - (mm) "Tender Fee" shall mean the fees submitted with the RFP:
 - (nn) **Deleted**
 - (oo) "Utility" means Electricity Department, Union Territory of Puducherry.
 - (pp)"Ultimate Parent Company" shall mean an entity which owns at least twenty six percent (26%) equity in the Sole Bidder or Member of a Consortium, (as the case may be) and in the Technically Evaluated Entity and/or Financially Evaluated Entity (as the case may be) and such Sole Bidder or Member of a Consortium, (as the ease may be) and the Technically Evaluated Entity and/or Financially Evaluated Entity (as the case may be) shall be under the direct control or indirectly under the common control of such entity.
- 1.1.1 Capitalised terms used herein but not defined specifically shall have the meaning as ascribed to them in Section 5 and Section 6, and elsewhere in RFP Document.

- 1.2 **Singular and Plural**: Where the context so requires, words imparting the singular only also include the plural and vice versa.
- 1.3 Headings and Marginal Notes: Headings and marginal notes to the terms and conditions of the Contract are not deemed to form part thereof nor are to be taken into consideration in the interpretation or construction thereof or of the Contract.

2. Introduction

(a) About this Request for Proposal

- 2.1 This Request for Proposal (RFP) is issued by PFCCL for Appointment of Advanced Metering Infrastructure (AMI) Service Provider for Implementation of Smart Prepaid Metering in Union Territory (UT) of Puducherry under Electricity Department, UT of Puducherry. This RFP Document provides the overall structure of the document (as outlined in the beginning of the document in the section titled "Summary, Abbreviations & Table of Content"), requirements and general terms and conditions applicable to each Bidder.
 - 2.1.1 The RFP Document (also referred to as the bidding document) consist of Parts I, II, and III, which include all the sections indicated below, and should be read in conjunction with any Addenda/ Corrigenda/ Amendments/ Clarifications etc. issued thereto from time to time in accordance with this Section 3.

PART I Bidding Procedures and Requirements

- Section 1 Request for Proposal Notice
- Section 2 Eligibility Requirements
- Section 3 Instructions to Bidders and Bid Data Sheet
- Section 4 Bidding Forms Technical Proposal
- Section 5- Bidding Forms Financial Proposal
- Section 6 Project Requirements

PART II Contract Form and Conditions of Contract

(b) Bidding Process and Electronic-Procurement System

 Section 7 – Contract Form and Conditions of Contract

PART III Contract Related Forms

- Section 8 Contract Related Forms
- 2.2 Bidding against the Request for Proposal shall be under Two Envelope Single Stage Bidding Process. The bidding process will be conducted online with Electronic Procurement System (e- Procurement/ e- Tendering/ e-Bidding System) as specified in **BDS**.
 - 2.2.1 The Bidders who wish to participate in online Tenders will have to procure/ should have legally valid digital signature as per Information Technology Act, 2000 using which they can sign their electronic Bids.

(c) Study of Utility's Existing Systems

- 2.2.2 All Bids should be digitally signed. For details regarding digital signature certificate and related training, the Bidder should contact at the address mentioned in **BDS**.
- 2.3 The Bidders are invited to submit their Proposal comprising a Technical Proposal and a Financial Proposal, for award of Contract named in the BDS. The Proposal will be the basis for evaluation and holding discussions, if required, and ultimately signing the Contract with the Selected Bidder.
- 2.4A standard brief regarding detail of existing systems relevant to the AMI Project has been provided in BDS. However, notwithstanding the same, all Bidders are advised to visit and examine the site and existing facilities, and obtain for itself, on its own responsibility and cost, all information that may be necessary for preparing the Bid. The cost of visiting the site shall be at the Bidder's own expense.
- 2.5 The Bidder and any of its personnel or agents shall be granted permission, through the assistance of PFCCL & Utility, by the Utility to enter upon its premises and lands for the purpose of such inspection, but only upon the express condition that the Bidder, its personnel and agents will release and indemnify PFCCL & Utility and its

personnel and agents from and against all liability in respect thereof and will be responsible for death or personal injury, loss of/or damage to property and any other loss, damage, costs and expenses incurred as a result of the inspection.

(d) Pre-Bid Meeting

- 2.6 The Bidder's designated representative(s) is/are invited to attend a pre-bid meeting at Bidder's expense, which shall take place at the time and venue specified in the **BDS**
- 2.7The purpose of the meeting will be to clarify any issues regarding this RFP in general and the scope of work in particular.
- 2.8 The Bidder may submit any question or query to PFCCL in writing, to reach PFCCL not later than one week before the meeting as per the format given in **BDS**. It may not be practicable at the meeting to answer questions received late, but questions and responses will be transmitted as indicated hereafter.
- 2.9 Minutes of the meeting, including the text of the questions raised and the responses given, together with any responses prepared after the meeting, will be transmitted through the e-Procurement System mentioned in ITB 2.2 without delay to all prospective Bidders who have downloaded the RFP.
- 2.10 Non-attendance at the pre-bid meeting will not be a cause for disqualification of a Bidder

3. Conflict of Interest

- 3.1 A Bidder shall not have a conflict of interest that affects the Bidding process (the "Conflict of Interest"). In the event a Bidder is found to have a Conflict of Interest, PFCCL may choose to reject the Bid, terminate the AMISP Contract (in the event it has been awarded) as per termination clause in the AMISP Contract. Any Bidder found to have a Conflict of Interest shall be disqualified.
- 3.2 A Bidder shall be deemed to have a Conflict of Interest affecting the bidding process, if:
 - (a) the Bidder or its Member (or any constituent thereof) and any other Bidder or its Member (or any constituent thereof) have common controlling shareholders or other ownership interest;

Provided that this disqualification shall not apply in cases where the direct or indirect shareholding of a Bidder or its Member (or any shareholder thereof having a shareholding of more than 15% (fifteen per cent) of the paid up and subscribed share capital of such Bidder or its Member, as the case may be) in the other Bidder or its Member, is less than 15% (fifteen per cent) of the subscribed and paid up equity share capital thereof;

Provided further that this disqualification shall not apply to any ownership by a bank, insurance company, pension fund or a public financial institution referred to in sub-section (72) of section 2 of the Companies Act, 2013.

For the purposes of this Clause, indirect shareholding held through one or more intermediate persons shall be computed as follows: (i) where any intermediary is controlled by a person through management control or otherwise, the entire shareholding held by such controlled intermediary in any other person (the "Subject Person") shall be taken into account for computing the shareholding of such controlling person in the Subject Person; and (ii) subject always to subclause (a) above, where a person does not exercise control over an intermediary, which has shareholding in the Subject Person, the computation of indirect shareholding of such person in the Subject Person shall be undertaken on a proportionate basis; provided,

however, that no such shareholding shall be reckoned under sub-clause (ii) if the shareholding of such person in the intermediary is less than 26% of the subscribed and paid up equity shareholding of such intermediary; or

- (b) a constituent of such Bidder is also a constituent of another Bidder; or
- (c) such Bidder or its Member thereof receives or has received any direct or indirect subsidy, grant, concessional loan or subordinated debt from any other Bidder or its Member, has provided any such subsidy, grant, concessional loan or subordinated debt to any other Bidder or its Member; or
- (d) such Bidder has the same legal representative for purposes of this Bid as any other Bidder; or
- (e) such Bidder, has a relationship with another Bidder, directly or through common third party/ parties, that puts either or both of them in a position to have access to each other's information about, or to influence the Bid of either or each other; or
- (f) such Bidder has participated as a consultant to the Authority in the preparation of any documents, design or technical specifications of the Project.

Explanation: In case a Bidder is a Consortium, then the term Bidder as used in this Clause shall include each Member of such Consortium.

4. Bidders to Inform Itself Fully 4.1 The Bidder shall make independent enquiry and satisfy itself with respect to all the required information, inputs, conditions (including site conditions) and circumstances and factors that may have any effect on its Bid. Once the Bidder has submitted the Bid, the Bidder shall be deemed to have examined the laws and regulations in force, and fixed its price taking into account all such relevant conditions and also the risks, contingencies and other circumstances which may influence or affect the Services performed within the scope of work, as provided in this RFP. Accordingly, the Bidder acknowledges that, on being selected, it shall not be relieved from any of its obligations

- under the RFP Documents nor shall be entitled to any extension of time for commencement of Services or financial compensation for any reasons whatsoever attributable to AMISP.
- 4.2 The Bidders should particularly acquaint themselves with the technical requirements of Utility's systems, operations, assets, equipment, statutory codes and standards.
- 4.3 The Bidder shall familiarize itself with the procedures and time frames required to obtain all consents, clearances and permits required for implementation of the Project
- 5. Fraud and Corruption
- 6. Eligibility and Qualification Requirements
- 5.1 PFCCL requires compliance with the Anti-Corruption Guidelines/ Laws in force of the relevant Government/ its instrumentalities/ PFCCL.
 - 6.1 The eligibility and qualification requirements for submission of Proposals against the RFP are given in Section 2. Proposals, if any, from Bidders not complying with the same shall be out-rightly rejected and shall not be considered for evaluation.

B. Preparation of Proposals

- 7. General
 Considerations
 and Instructions
- 7.1 In preparing the Proposal, the Bidder is expected to examine the RFP Document in detail. Material deficiencies in providing the information or documentation requested in the RFP Document may result in rejection of the Proposal.
- 7.2 All Bidders shall comply with the dates and amounts indicated in **Section 1** of this RFP.
- 7.3 The Bidders shall comply with and agree to all the provisions of this RFP for various bidding considerations including but not limited to eligibility, costs, payments, information regarding Utility's systems, Bid formats, Bid submission and other considerations.
- 7.4 The Bidders shall be evaluated based on the requirements, criteria, norms and procedures laid out or included by reference, in this Section 3 of the RFP Document.
- 7.5 The Bidders shall be required to undertake the scope of work for the Project indicated in **Section 5** of the RFP Document.
- 7.6 The Bidders must conform to the requirements and provide a list of equipment (including any special equipment) necessary to meet the technical specifications, functional & performance requirements as specified in the Section 6 of RFP Document as per the format provided in Form 14 in Section 4. The equipment supplied shall confirm to all the requirements under all applicable laws including any order issued by the central government including Order No No.9/16/2016-Trans-Part(2) dated 18 November 2020 and Order No. 11/05/2018-Coord. dated 17 September 2020 issued Power and Order bν Ministry of F/No.6/18/2019-PPD by Ministry of Finance, Department of Expenditure, Public Procurement Division dated 23 July 2020 including any amendments or modifications to the same from time to time.
- 7.7 Bidder shall submit 'Clause by Clause' compliance to the RFP document including the AMISP Contract and the technical specifications and functional requirements (with amendments, if any) as per the format prescribed in Form 15 given in Section 4.
- 7.8 Bidder's Proposal shall include sufficient information and

supporting documentation in order to determine compliance without further necessity for inquiries.

- 7.9 The Bidder's Proposal shall clearly identify all features described in the specifications along with any supporting reference material in accordance with ITB 15.13 as per the format prescribed in Form 3 given in Section 4.
- 7.10 An analysis of the technical specifications, functional and performance requirements of the AMI system as provided in Section 6 may lead the Bidders to conclude that additional items (for example communication repeater, router etc.) are required that are not specifically mentioned in this specification. The Bidders shall be responsible for installing such items (at no additional cost to PFCCL) such that a reliable and fully functional AMI system is implemented that meets or exceed the capacity and performance requirements. Such materials shall be deemed to be within the scope of the AMISP Contract. To the extent possible, the Bidder shall identify and include all such additional items in their proposal.
- 7.11 The Bidders are advised to visit sites (at their own expense), prior to the submission of the proposal, and make surveys and assessments as deemed necessary for proposal submission.
- 7.12 Failure by PFCCL to require information from a Bidder that has not been properly provided shall not be construed as waiver on the part of PFCCL of the obligation of the Bidder to furnish the said data / information unless the waiver is in writing.
- 7.13 Bid submitted by the Bidders before the Bid Submission Deadline, shall become the property of PFCCL and shall not be returned to the Bidders.
- 7.14 The cost of all stamp duties payable for executing the RFP, Bid Documents or Project shall be borne by the Bidders.
- 7.15 No interest shall be paid to the Bidder on any amount submitted to PFCCL, whether to be returned or not.
- 8. Cost of Bidding / Preparation of Proposal
- 8.1 The Bidder shall bear all costs associated with the preparation and submission of its Proposal, including post-bid discussions, technical and other presentations etc.,

and PFCCL shall not be responsible or liable for those costs, regardless of the conduct or outcome of the selection process. PFCCL is not bound to accept any proposal, and reserves the right to annul the selection process at any time prior to Contract award, without thereby incurring any liability to the Bidder.

9. Language

- 9.1 Bid/ Proposal prepared by the Bidders and all correspondence and documents relating to the Bid exchanged by the Bidder and PFCCL and its associates shall be written in the English language.
- 10. Documents
 Comprising the
 Proposal and
 List of Forms
- 10.1 The Proposal shall comprise the documents and forms mentioned in this Section in general and listed in **Section 4** and **Section 5** in particular. A Document Checklist for the same as well as the list of forms referred to in this RFP Document is provided in **BDS**.
- 11. Only One Proposal
- 11.1 A Bidder shall submit only one Bid in the same bidding process, either individually as a Sole Bidder or as a Member of a Bidding Consortium (including the Lead Member). It is further clarified that any of the Parent/ Affiliate/Ultimate Parent of the Bidder/ Member in a Bidding Consortium shall not separately participate directly or indirectly in the same bidding process.
- 12.Proposal / Bid Validity & Bid Security
- 12.1 The Bid/ Proposal submitted by the Bidder(s) shall be valid for a period of specified in **BDS** reckoned from the Bid Submission Deadline specified in ITB 17 as may be extended from time to time.
 - 12.1.1 All such offers, and terms and conditions set forth in this RFP shall be valid for the AMISP till the successful completion of the Project.
 - 12.1.2 In exceptional circumstance, PFCCL may solicit the Bidder's consent to an extension of the Bid validity period. The request and responses thereto shall be made in writing or by email. A Bidder granting the request will not be required or permitted to modify its Bid.
- 12.2 The Bidder shall furnish as part of its Technical Bid, a Bid Security in original form, and in the amount specified in the BDS.
- 12.3 Pursuant to **ITB 12.2**, the Bid Security shall be a

demand guarantee, and in any of the following forms, at the Bidder's option:

- (a) an unconditional bank guarantee issued by any of the banks mentioned in **BDS**:
- (b) Bid Security in other forms, if specified in the **BDS**.

In the case of a bank guarantee, the Bank Guarantee for Bid Security shall be provided by the Lead Consortium Member/ Sole Bidder in the format prescribed in Form 6 included in **Section 4**, Bidding Forms - Technical Proposal. The bid security shall be valid for 90 (ninety) Days beyond the end of validity period of the Bid specified in ITB 12.1. This shall also apply if the period of the Bid validity is extended.

- 12.4 Any Bid not accompanied by a substantially responsive Bid Security a specified, shall be rejected by PFCCL as non-responsive.
- 12.5 If the Bid Security from any Bidder is forfeited or lapsed either partly or wholly during the Bid process, then such Bidders and Consortium are liable for rejection.
- 12.6 Bid Security of unsuccessful Bidders shall be returned as promptly as possible upon the successful bidder's signing the contract and furnishing the Performance Security pursuant to **ITB 29**.
- 12.7 The Bid Security of the Selected Bidder shall be returned as promptly as possible once the AMISP has signed the Contract with PFCCL and furnished the required Performance Security.
- 12.8 The Bid Security may be forfeited if
 - 12.8.1 the Bidder withdraws/ modifies/ substitutes its Bid during the period of Bid validity as specified in ITB 12.1 or any extension thereto provided by the Bidder;
 - 12.8.2 bid is rejected for existence of conflict of interest or more than one bid being submitted by a Bidder;
 - 12.8.3 bid submitted by a Consortium is not accompanied by Consortium Agreement in the form provided in

this RFP.

- 12.8.4 The Selected Bidder:
- 12.8.4.1 fails to sign the AMISP Contract; or
- 12.8.4.2 fails to furnish a Performance Security in accordance with ITB 29; or
- 12.8.4.2 is found to have submitted false particulars/ fake documents; or
- 12.8.4.3 refuses to execute the work at its agreed scope/quoted rates, after PFCCL issues the Letter of Award;
- 12.8.4.4 is involved in incidents of manipulation of rates either by cartelization or otherwise.

a. Extension of Proposal Validity

- 12.8PFCCL will make its best effort to complete the bidding process and award the contract prior to the date of expiry of the Bid/ Proposal validity. However, should the need arise, PFCCL may request, in writing, all Bidders who submitted Bids/Proposals prior to the Bid Submission Deadline to extend the Proposals' validity.
- 12.9 If the Bidder agrees to extend the validity of its Proposal, it shall be done without any change in the original Proposal.
- 12.10 The Bidder has the right to refuse to extend the validity of its Proposal in which case such Proposal will not be further evaluated.

13. Clarification and Amendment of RFP

- 13.1 Bidders may seek clarifications on this RFP in writing, through a letter, fax or email to reach PFCCL no later than the period specified in BDS.
- 13.2 PFCCL may issue clarification only, at its sole discretion, which is considered reasonable by it.
- 13.3 Any such clarifications issued shall be sent to all the Bidders to whom the RFP has been issued. Any such clarification shall also be hosted on the website of PFCCL mentioned in ITB 2.1.

- 13.4 PFCCL is not under any obligation to entertain/ respond to suggestions made or to incorporate modifications sought for
- 13.5 For the avoidance of any doubt, it is hereby clarified that PFCCL is not obliged to extend the Bid Submission Deadline on account of clarifications sought in accordance to ITB 13.4.
- 13.6 During the bidding process, PFCCL, for any reason may modify the RFP, including the timelines, by issuance of addendum/ modification/ errata and/ or a revised document.
- 13.7 Revisions or amendments in the bidding guidelines may cause PFCCL to modify amend or supplement the RFP to be in conformance with any applicable Law. Such document shall be notified in writing through the e-Procurement System mentioned in ITB 2.1 or letter or fax or e-mail to all the entities who have downloaded the RFP, and the same shall be binding on them.
- 13.8 PFCCL shall not be responsible for any delay in receipt of the addendum/ modification/ errata and/ or revised document and receipt of the same by the Bidders shall be presumed by PFCCL upon taking all reasonable steps to notify the Bidders. Late receipt of any addendum/ modification/ errata and/ or revised document will not relieve the Bidder from being bound by that modification or the Bid Submission Deadline. All such amendments/modifications shall be issued at least 7 (seven) working days prior to the Bid Submission Deadline.
- 13.9 In order to provide reasonable time to the Bidders to take the modification into account in preparing their Bid, or for any other reasons, PFCCL may, at its discretion, extend the deadline/ timeline for Bid submission.
- 14. Preparation of Bid/ Proposal and Bid Formats
- 14.1 The Bidder shall prepare its Bid and furnish required information and documents as per the guidelines, formats, forms, schedules, fees, and other specification in this Section, as well as the RFP Document in general.
- 14.2 Strict adherence to the formats/ forms, wherever specified, is required. Wherever information has been sought in specified formats, the Bidder shall refrain from referring to brochures or pamphlets. Non-adherence to

formats and/ or submission of incomplete information may be a ground for declaring the Bid as nonresponsive. Each format must be duly signed and stamped by the authorized signatory of the Bidder.

15. Technical Bid/ Proposal Format and Content

- 15.1 The Technical Bid/Proposal shall be prepared using the Forms provided in Section 4 of the RFP and shall comprise the information, details and documents listed in subsequent clauses herein The Technical Bid/ Proposal shall not include any financial information. A Technical Proposal containing material financial information shall be declared non-responsive.
- 15.2The Technical Bid shall contain the list of all participating Consortium Members and Sub-contractor(s) (if applicable) participating in the Bid as per the format prescribed in Form 1 given in Section 4. Furthermore, the Technical Bid shall contain a covering letter by the Lead Consortium Member/ Sole Bidder duly designated and signed by all Members of that Bidding Consortium as per the format prescribed in Form 8 given in Section 4.
- 15.3The Technical Bid shall contain a legally enforceable Consortium Agreement (in case Bidder is a Consortium) entered amongst all Members of that Bidding Consortium, designating one of the Members to be the Lead Consortium Member as per the format prescribed in Form 8 given in Section 4. In the absence of a duly executed Consortium Agreement, the Bid shall not be considered for evaluation and will be rejected.
- 15.4The Technical Bid shall contain Power of Attorney from each Consortium Member in favour of the Lead Consortium Member as per the format prescribed in Form 9 given in Section 4. All submissions and representations by the Lead Member shall be deemed to be on-behalf of the entire consortium and shall be binding all the members of the Consortium.
- 15.5 In case a Sole Bidder or any Consortium Member is a foreign entity, then it may submit a Board resolution/ Power of Attorney/ authorization, which should satisfactorily and unambiguously encompass all the terms and conditions of the Power of Attorney prescribed in Form 9 given in Section 4.
- 15.6The Lead Consortium Member/ Sole Bidder shall

designate one person to represent the Bidding Consortium/ Bidder in its dealings with PFCCL. The person designated by the Lead Consortium Member/ Sole Bidder (registered Company) shall be authorized through a Power of Attorney as per Form 10 given in Section 4 to perform all tasks including, but not limited to, providing information, responding to inquiries, signing of Bid on behalf of the Consortium, etc. and attach the same in the Technical Bid.

- 15.7The Technical Bid shall contain signed Letter of Consent as per Form 11 given in Section 4 from each Consortium Member that the Bid has been reviewed and each element of the Bid is agreed to by them including but not limited to any commitment in the Project.
- 15.8 The Technical Bid shall contain the Tender Fees and the Bid Security as per the format prescribed in Form 6 given in Section 4.
- 15.9 The Technical Bid shall contain all documents required to prove/ substantiate the Eligibility Requirement of the Bidders or the Bidding Consortium specified in ITB 6.1 and Section 2 (as per the format prescribed in Form 2 given in Section 4):
 - a) Company profile document with evidence of fields of competence for each Consortium Member:
 - b) Attested copy of Certificate of Registration/ Incorporation issued by the Registrar of Companies for each Consortium Member/ Bidder;
 - c) Certificate of Commencement of Business issued by the Registrar of Companies for Lead Consortium Member/ Sole Bidder clearly indicating the number of years of operation.
- 15.10 The Bidder shall submit a preliminary Project implementation plan along with the Bid which shall include at least the following activities (as per the format prescribed in Form 3 given in Section 4).
- 15.11 In case of Award of the AMISP Contract, the detailed

Project implementation plan, submitted as part of the Technical Bid, shall be revised and submitted by the AMISP, in consultation with PFCCL and the Utility, to ensure smooth takeover of existing Utility systems and any ongoing Services under the scope of the AMI Project.

- 15.12 The Technical Bid of the Bidder shall contain the indicative List of Material and Services in the format prescribed in Form 14 as given in Section 4 without any mention of costs/ prices.
- 15.13The List of Material and Services shall be accompanied by the detailed specifications of the supply in the Technical Bid demonstrating responsiveness of the quoted Solution. The Bidder shall also indicate the country of origin of each equipment in Form 14 as given in Section 4. For supply of equipment / material from the country of origin other than India, the bidder shall submit performance certificate in support of satisfactory operation in India or a country other than the country of origin having climatic and operational conditions including ambient temperature similar to that of India for more than number of years, indicated in BDS in accordance with Order No. 11/05/2018-Coord. dated 17 September 2020 issued by the Ministry of Power including amendments or modifications to the same from time to time.
- 15.14 The Technical Bid of the Bidder shall contain the names and details of the suitably qualified Bidder's representative and Key Personnel to perform the AMISP Contract as per the format provided in Form 4 given in Section 4. The data on their experience should be supplied using the Form 5 given in Section 4 for each candidate proposed.
- 15.15 Any removal/ change/ replacement of Key Personnel (as provided in Form 4 and 5 given in Section 4) shall be notified to PFCCL within 7 (seven) working days along with the Curriculum Vitae (CV) of the personnel replacing the previous personnel. The personnel replacing the previous key personnel shall have equivalent or better

educational qualification and relevant professional experience

15.16 Undertaking from the Technically OR Financially Evaluated Entity(ies) OR Undertaking from the Ultimate Parent Company for total equity investment commitment, in the prescribed format in Form 18, to meet any shortfall in the equity investment by the Selected Bidder in the SPV.

Note: The effective Equity holding Of the Selected Bidder in the SPV, as specified in Clause 4.2 shall be computed as per the provisions Of Clause 4.2.6 of this RFP.

Provided further, in case the Sole Bidder or Member of a Consortium, (as the case may be) holds at least twenty six percent (26%) equity in such Technically; Financially Evaluated Entities, whose credentials have been considered for the purpose of meeting the Qualification Requirements as per the RFP, no such Undertaking shall be required from the Technically / Financially Evaluated Entities.

- 15.17 Board resolutions. as per prescribed formats enclosed as Form- 19. duly certified by the Company Secretary or any Whole-time Director / Manager (supported by a specific Board Resolution), as applicable to the Bidder and mentioned hereunder,
 - (a) Board resolution from the Sole Bidder (and any investing Affiliate / Parent Company / Ultimate Parent Company) committing one hundred percent (100%) in aggregate of the equity requirement for the Project Format-1 of Form 19.
 - (b) Board resolutions from each of the Consortium Member of the Bidding Consortium (and any investing Affiliate / Parent Company / Ultimate Parent Company) together committing to one hundred percent (100%) in aggregate of equity requirement for the Project, in case Bidder is a Bidding Consortium Format-I of Form 19;
 - (c) In either of the cases as in (a) or (b) above as

applicable, Board resolutions as per Format 2 of Form 19 for total equity investment commitment from the Technically / Financially Evaluated Entity(ies) whose technical / financial credentials had been considered for the purpose of meeting Qualification Requirements as per the RFP

OR

Board resolutions as per Format 2 of Form 19 from the Parent Company or the Ultimate Parent Company for total equity investment commitment. Provided that such Board resolutions, as specified in (a) or (b) or (c) above. In case of a foreign entity, shall be supported by an unqualified opinion issued by an independent legal counsel practicing in the relevant country, stating that the Board resolutions are in compliance with the applicable laws of the respective jurisdictions of the issuing company and the authorizations granted therein are true and valid.

For clarity sake, illustrations identifying which Board Resolution shall be applicable in typical cases are provided in Annexure to Form 19.

15.18 Bidder shall submit signed copies of Integrity Pact as per format provided in Form 21 of RfP

Note: Submission of the Technical Proposal in a materially wrong format may lead to the Proposal being deemed non-responsive to the RFP requirements.

16. Financial Bid/ Proposal Format and Content

- 16.1 The Financial Proposal shall be prepared using the Forms provided in Section 5 of the RFP and shall comprise the information, details and documents listed in subsequent clauses herein.
- 16.2 The Financial Bid shall only be submitted electronically as per the format prescribed in Form 1 given in Section 5. No hard copy of the Financial Bid shall be submitted.
- 16.3 The Financial Bid shall include only the cost of different meter types that are required for installation, operation and maintenance of the Project and the person-manmonth rate for executing new requirement for software components. Price quoted should clearly mention the basic cost/ unit

price, including any other taxes/ duties/ levies and any other taxes/ duties/ levies, Goods and Service Tax (GST). The Financial Bid will be evaluated basis the total cost of the Project as quoted by the Bidder(s) for the Contract Period in Form 1 given in Section 5.

16.4 The Bidder shall quote the total cost (i.e. sum of capex and opex cost) for each type of meter for the term of the AMISP Contract on INR per meter basis in line with the payment schedule as provided in the AMISP Contract. The Financial Bid shall be quoted in both 'numbers' and 'words'. In case of any discrepancy between the quoted Financial Bid in 'numbers' and 'words', the quoted Financial Bid in 'words' will prevail over the quoted Financial Bid in 'numbers'.

While providing the financial quote, the Bidder must consider the following:

- a. An amount equivalent to 22.5% of the cost of meters (including GST) limited to Rs. 1350 per meter would be paid to AMISP out of Govt. of India Grant provided to the Utility as per the payment terms defined in clause 5.2.3 of the General Conditions of the Contract (GCC).
- b. The balance amount has to be arranged by AMISP which would be reimbursed by PFCCL to AMISP in 30 equal quarterly installments during the Facility Management Services (FMS) period (i.e. after the date of operational acceptance of the entire project).
- 16.5 Unit prices (exclusive of all taxes/ duties/ levies/ cess etc.) (as provided in Form 1 given in Section 5) quoted by the Bidder shall be firm and final and shall remain constant throughout the Contract Period and shall not be subject to any modifications.
- 16.6 Any items or prices omitted by the Bidder, if incurred at a later stage by the Bidder, within the scope of work as provided in the AMISP Contract, shall be borne by the Bidder with no financial liability on PFCCL.
- 16.7 Any scope of work required for expansions during the

Contract Period shall be supplied by the AMISP keeping the specifications and unit price same as per the List of Material and Services (as provided in Form 14 given in Section 4) and Financial Bid (as provided in Form 1 given in Section 5), respectively.

- 16.8 All prices in the Financial Bid shall be quoted in Indian Rupees. The Bidder shall bear the risk related to foreign exchange variations during the Contract Period. The variation in the statutory taxes will be in accordance with the AMISP Contract.
- 16.9 Alternative (alternate technology/ architecture/ design/ functionality or proposals with multiple options) Bids shall be rejected.

C. Submission, Opening and Evaluation

17. Submission of Bids/ Proposals and Bid Submission Deadline

(a) Submission of Bids/ Proposals

- 17.1 Both Technical Bid and Financial Bid shall be digitally signed and submitted electronically using the eProcurement system indicated in ITB 2.2 on or before the Bid Submission Deadline following the instructions therein. All the documents shall be scanned and uploaded however, where the data is required to be entered manually, the same shall be entered accordingly by the Bidder.
- 17.2 Requisite Tender Fee and Bid Security in the specified form/ instrument shall be submitted in original so as reach before the Bid Submission Deadline, failing which the Bid shall be deemed non-responsive.
- 17.3 In addition to the electronic submission and submission of Tender Fee and Bid Security in the specified form/instrument in original as per ITB 17.2, if so specified in **BDS**, the Bidder shall also provide certain document in original/ hard copy/(ies) of the original/ revised (if any) in a sealed envelope before the Bid Submission Deadline.

- 17.4 The hard copies to be submitted as per ITB 17.3 shall be in original and/ or attested as may be specified in **BDS**.
- 17.5 The hard copy of the document as per ITB 17.2 and ITB 17.4 above shall be sent in a sealed envelope to PFCCL via Registered Post with Acknowledgement Due (RPAD), speed post or courier in the manner specified in ITB 17.4.3, which should reach PFCCL before the Bid Submission Deadline.
- 17.6 The sealed envelope shall be clearly marked on the top with details mentioned in **BDS**. The sealed envelope shall be addressed to PFCCL as specified in **BDS**. The sealed envelope shall also clearly mention the name of the Lead Consortium Member/ Sole Bidder submitting the Bid.
- 17.7 The sealed envelope shall not contain the Financial Bid. The Financial Bid shall only be submitted electronically.
- 17.8 In case of discrepancy between the electronically submitted documents and the physically submitted documents in the sealed envelope, the electronically submitted documents and the information contained therein shall prevail and be treated as the final submission.
- 17.9 Insufficiency of the electronically submitted Bid shall not be compensated by any information, documentation or material provided additionally in the physically submitted documents in the sealed envelope.
- 17.10 All Bids shall be electronically submitted and physically received, as may be specified in this Section, by PFCCL no later than the Bid Submission Deadline indicated in **BDS** as may be extended from time to time by PFCCL.
- 17.11 Bidders may prepare, edit, substitute or withdraw their offers any number of times online before the Bid Submission Deadline as may be permitted by the e-Procurement system. After the Bid Submission Deadline, the Bidder shall not, or attempt to, change or withdraw the Bid under any circumstances. No written or online request

Submission Deadline

in this regard shall be entertained.

- 17.12 Any Bid received by PFCCL, either electronically or physically, after the Bid Submission Deadline prescribed by PFCCL will not be uploaded and accordingly be rejected. In case of hard copy submissions, late Bids shall be returned unopened to the Bidder.
- 17.13 PFCCL may, at its discretion, extend this Bid Submission Deadline by amending the RFP at any time prior to opening of the Bids, in which case all rights and obligations of PFCCL and the Bidders shall thereafter be subject to the deadline as extended.
- 17.14 Any Proposal or its modification received by PFCCL after the deadline through any means or medium, whatsoever, shall be declared late and rejected, and promptly returned unopened.

18. Confidentiality

- 18.1 Information relating to the examination, evaluation, comparison and recommendation of AMISP Contract award, shall not be disclosed to Bidders or any other persons not officially concerned with such process.
- 18.2 Any attempt by a Bidder to influence PFCCL in the examination, evaluation, comparison, and post qualification of the Bids or AMISP Contract award decisions may result in the rejection of its Bid.
- 18.3 If any Bidder, from the time of opening the Technical Bids to the time of AMISP Contract award, wishes to contact PFCCL on any matter related to the bidding process, it should do so in writing.

19. Opening of Technical Bids/ Proposals

- 19.1 The Technical Bids shall be opened at the date and time, and the address indicated **BDS**. In case hard copy submission of Technical Bid or certain document is requested by PFCCL as per ITB 17 the physically submitted Technical Bids/ documents in the sealed envelope shall be opened simultaneously to check interalia requisite submissions and for the Tender Fees and the Bid Security.
- 19.2 The Bids shall be deemed to be under consideration immediately after they are opened and confirmation or

receipt of the Tender Fee and Bid Security, and until an official intimation of award or rejection is made by PFCCL to the Bidders.

- 19.3 PFCCL shall then separately evaluate the Bids with respect to the Eligibility and Qualification Requirements, sufficiency of the submission, conformation/ compliance/ responsiveness to all the mandatory requirements, terms, conditions, and specifications of the RFP Document without any deviation, reservation, or omission, and other parameters outlined in this RFP.
- 19.4 The Financial Proposal shall remain unopened in the e-Procurement/ e-Tendering system securely, until they are opened in accordance with ITB 22.
- 19.5 At the opening of the Technical Proposals the following shall be read out: (i) the name of the Bidder; (ii) any modifications to the Proposal submitted through the e-Procurement/ e-Tendering system prior to proposal submission deadline; and (iii) any other information deemed appropriate.
- 20. Bid/ Proposals
 Evaluation
 Overview and
 Verification/
 Clarifications
- 20.1 The bidding process is designed to select the AMISP through a series of assessment of: (i) conformation/ compliance to all the mandatory requirements under applicable laws and this tender, terms, conditions, and specifications of the RFP Document without any material deviation, reservation, or omission; and (ii) the financial amounts quoted by the Bidder. The Bid submitted by the Bidder shall consist of a Technical Bid and a Financial Bid.

First Stage-Fulfillment of Eligibility and Qualification Requirements and determination of substantial responsiveness to the RFP Documents: The Technical Bids shall be opened by PFCCL and be checked to determine (i) whether the Bidders comply with the Eligibility Requirements, have offered eligible AMI Services in their Bids, as specified in ITB 6.1 and Section 2; (ii) whether the Bidders meet the Qualification Requirement specified in ITB 6.2 and Section 2; (iii) whether the Bids are substantially responsive to the RFP document including the requirements specified in Section 7 basis 'Clause by

Clause' compliance to the RFP Document including the technical specifications and functional requirements (with amendments, if any) as per the format prescribed in Form 15 given in Section 4

The Technical Bids of all Bidders qualifying the Eligibility Requirements shall be scored based on the criteria including but not limited to volume, reliability and timely delivery of similar work done, as outlined in Clause 8.4 of Section 2. The bidders scoring more than 70 marks out of 100 shall qualify for the next stage of evaluation

Second Stage-Opening of Financial Bid: Financial Bids of all technically qualified Bidders would be opened, basis which the award of AMISP Contract shall be determined.

Third Stage-Award of Project:

The "Successful Bidder" as defined in ITB 25 shall be awarded the AMISP Contract.

- 20.2 The Bidder is not permitted to alter or modify its Bid/ Proposal in any way after the Bid Submission Deadline.
- 20.3 PFCCL's determination of the responsiveness of a Bid/ Proposal is to be based on the contents of the Proposal itself including any response to clarifications sought by PFCCL which does not alter the substance of the Proposal or the price.
- 20.4 A substantially responsive Bid/ Proposal is one that conforms to all the mandatory requirements, terms, conditions, and specifications of the RFP Document without any material deviation, reservation, or omission as defined in ITB 24.1.
- 20.5 The Contract, if awarded, shall be executed in accordance with RFP document and any other conditions.
- 20.6 Notwithstanding anything stated in the RFP Document, PFCCL reserves the right to verify the authenticity of the documents submitted for meeting the eligibility, qualification and/or other specified requirements and may request for clarifications any additional information/

documents from the Bidder. However, the Bidder shall not be permitted to alter the substance of the Proposal or the price under any circumstances whatsoever

- 20.7 PFCCL reserves the right at its sole discretion to contact the Bidder's bank, lenders, financing institutions and any other persons as necessary to verify the Bidder's information/documents for the purpose of eligibility, qualification and/ or other specified requirements.
- 20.8 PFCCL may verify the Bidder's technical and financial data by checking with the Bidder's clients/ lenders/ bankers/ financing institutions/ any other person as necessary.
- 20.9 To assist in the examination, evaluation, comparison and post-qualification of the Bids, PFCCL may, at its discretion, ask any Bidder for a clarification of its Bid. Any clarification submitted by a Bidder that is not in response to a request by PFCCL shall not be considered. PFCCL's request for clarification and the response shall be in writing. No change in the prices shall be sought, offered, or permitted by PFCCL in the evaluation of the Financial Bids.

21. Evaluation of Technical Bids/ Proposals

- 21.1 All Bids will first be evaluated for 'Clause by Clause' compliance to the RFP document and the AMISP Contract including the technical specifications and functional requirements (with amendments, if any) as per the format prescribed in Form 15 given in Section 4. The Bidders fulfilling the Eligibility and the Qualification Requirement and having submitted substantially responsive Bids conforming to and meeting all the mandatory requirements, terms, conditions, and specifications of the RFP Document without any material deviation, reservation, or omission as defined in ITB 24,, shall qualify for the opening of Financial Bid.
- 21.2 In the event the Technical Bid is substantially responsive, PFCCL may waive any deviation, reservation, or omission in the Bid as defined in ITB 24.1.
- 21.2.1 Provided that a Technical Bid is substantially responsive, PFCCL may request that the Bidder submit the necessary information or documentation, within a reasonable period of time, to rectify nonmaterial, nonconformities or omissions in the Technical Bid related to documentation requirements. Such omission

shall not be related to any aspect of the price Bid. Failure of the Bidder to comply with the request may result in the rejection of its Bid.

22. Opening of Financial Proposals

- 22.1 At the completion of the technical evaluation, PFCCL shall intimate the technically qualified Bidders for opening of Financial Bids, along with the date, time and venue of opening of Financial Bids.
- 22.2 The Financial Bids shall be opened through the e-Procurement system referred to in ITB 2.2, in the presence of authorized representatives of all technically qualified Bidders who chose to be present at the specified venue on the specified date and time.

23. Evaluation of Financial Bids/Proposals

- 23.1 Provided that the Technical Bid is substantially responsive, PFCCL will correct arithmetical errors during evaluation of Financial Proposals on the following basis:
 - i. if there is a discrepancy between the unit price and the total price that is obtained by multiplying the unit price and quantity, the unit price shall prevail and the total price shall be corrected, unless in the opinion of PFCCL there is an obvious misplacement of the decimal point in the unit price, in which case the total price as quoted shall govern and the unit price shall be corrected;
 - ii. if there is an error in a total corresponding to the addition or subtraction of subtotals, the subtotals shall prevail, and the total shall be corrected;
 - iii. if there is a discrepancy between words and figures, the amount in words shall prevail. However, where the amount expressed in words is related to an arithmetic error, the amount in figures shall prevail subject to (i) and (ii) above.

Except as provided in (i) to (iii) herein above, PFCCL shall reject the Financial Bid if the same contains any other computational or arithmetic discrepancy or error.

24. Deviations, Reservations and Omissions

- 24.1 During the evaluation of Bids/ Proposals, the following definitions apply:
 - (a) "Deviation" is a departure from the requirements specified in the RFP document;
 - (b) "Reservation" is the setting of limiting conditions or withholding from complete acceptance of the

requirements specified in the RFP document; and

- (c) "Omission" is the failure to submit part or all of the information or documentation required in the RFP document.
- 24.2 A substantially responsive Bid is one that meets the requirements of the bidding document without material deviation, reservation, or omission. A material deviation, reservation, or omission is one that:
- (a) if accepted, would:
- (i) affect in any substantial way the scope, quality, or performance of the Goods and Related Services specified in the Contract; or
- (ii) limit in any substantial way, inconsistent with the bidding document, the Utility's rights or the Bidder's obligations under the Contract; or
- (b) if rectified, would unfairly affect the competitive position of other Bidders presenting substantially responsive Bids.

25. Successful / Selected Bidder

- 25.1 The price as per the Financial Proposal/ Bid of all technically qualified Bidders, determined upon evaluation of Financial Proposals/ Bids, shall be the basis for determination of the Successful Bidder/ Selected Bidder.
- 25.2 The technically qualified Bidder with the lowest Financial Bid shall be considered as the Successful Bidder/ Selected Bidder and shall be considered for award of the AMISP Contract.
- 25.3 If the Successful Bidder/ Selected Bidder does not accept the correction of errors as per ITB 23.1, its Bid shall be disqualified, and its Bid Security shall be forfeited.

D. Award of Contract

26. Award Criteria

- 26.1 Subject to ITB 25.3, PFCCL shall award the Contract to the Successful Bidder/ Selected Bidder.
- 26.2 Utility shall present the Letter of Award (as per the format prescribed in Form 2 given in Section 8) to the Successful Bidder and invite the Performance Security in order to sign the AMISP Contract to implement the Project.
- 26.3 The Successful Bidder shall provide an undertaking that

- the key staff identified for the Project (as submitted in its Technical Bid) shall be available for the respective proposed work requirement, anytime during the duration of the Project, till its successful completion
- 26.4 If for any reason the Bid of the Successful Bidder is rejected or Letter of Award issued to the Successful Bidder is cancelled, PFCCL is empowered to take decisions for any of the following:
 - a) Consider the next lowest evaluated Bid from eligible and qualified Bidder whose bid is determined substantially responsive; or
 - b) Annul the Bid process; or
 - c) Take any such measure as may be deemed fit in the sole discretion of PFCCL, as applicable.
- 27. Utility's Right to Vary Quantities at the time of Award
- 27.1 PFCCL reserves the right to increase or decrease the number of items under the AMISP Contract subject to the limit of 20% (twenty percent) up to +30% (thirty percent) of the existing number of items (as provided in Form 1 given in Section 5), covered under the AMISP Contract, without any change in the unit prices or other terms and conditions of the AMISP Contract and the Bid. AMISP has to ensure 100% coverage of all consumers through smart meters which is the target of the project and for which Utility/ PFCCL shall extend all possible support
- 28. Letter of Award
- 28.1 Prior to the expiry of the period of Bid validity, PFCCL shall notify the successful Bidder, in writing, by issuing the Letter of Award, that its Bid has been accepted.
- 28.2 Until the AMISP Contract is prepared and executed, the notification of award shall constitute a binding contract.

29. Signing of Contract and Contract Performance Security

- 29.1 Within 21 (twenty-one) Days of receipt of the Letter of Award, the successful Bidder shall sign the AMISP Contract.
- 29.2 Within 14 (fourteen) Days of the receipt of Letter of Award from PFCCL, the Successful Bidder shall furnish the Performance Security, using for that purpose the format of Performance Security given in Form 1 in Section 8. Immediately upon furnishing of Performance Security, AMISP may request PFCCL to execute the AMISP Contract.
- 29.3 In case the Selected Bidder is a consortium, the members of the consortium shall incorporate themselves as a company called the Special Purpose Vehicle (SPV) under the Companies Act, 2013. A Sole Bidder may also, at its discretion and with permission of PFCCL, incorporate a separate company as a SPV under the Companies Act, 2013 with 100% equity ownership to execute the Project. The SPV so incorporated shall sign the contract agreement along with the Selected Bidder
- 29.4 Failure of the Successful Bidder to submit the abovementioned Performance Security or sign the AMISP Contract shall constitute sufficient grounds for the annulment of the award and forfeiture of the Bid Security. In that event PFCCL may award the AMISP Contract to the next lowest Bidder.

E. Bid Data Sheet

ITB Reference	A. General Provisions
1.1 (e)	Formation of SPV is mandatory in the event the Selected Bidder is a Consortium. In the event the Selected Bidder is a Sole Bidder as an individual entity, or is a Bidding Consortium comprising of at least one Central Public Sector Enterprise (CPSE) / Public Sector Undertaking (PSU) or a Subsidiary/ Joint Venture of a CPSE/ PSU, such Bidder at its discretion and with permission of PFCCL, incorporate a separate company as a SPV under the Companies Act, 2013 with 100% equity ownership to execute the Project

1.1 (cc)

RfP No. Smart_Metering/Puducherry/2021 dated 03.12.2021

Government of India has launched the "Revamped Distribution Sector Scheme – A Reforms-based and Result-linked Scheme" on 20.7.2021 to improve the reliability and quality of power supply, operational efficiencies and financial sustainability of the electricity distribution sector. One of the key areas of the scheme is implementation of Prepaid Smart Metering in public-private-partnership mode.

Electricity Department, Union Territory (UT) of Puducherry (Utility) has appointed PFC Consulting Ltd. (PFCCL) as Project Implementing Agency (PIA) for implementation of Smart Metering in Union Territory of Puducherry under the above scheme.

PFCCL desires to appoint an "Advance Metering Infrastructure Service Provider (AMISP)" or the "AMISP" for implementation of the Advance Metering Infrastructure (AMI) Project in the pre-paid (by default)/ post-paid mode in selected area(s) of operation.

AMISP shall be responsible to implement the entire project within 10 months and shall also be responsible for operation & maintenance of all meters and related infrastructure for 90 months after operational acceptance of the entire AMI system.

As this is a flagship project of Govt. Of India, the AMISP has to strictly comply with the project implementation schedule.

PFCCL shall make payments to AMISP in accordance with the terms and conditions of the Contract. Ownership of the entire system including all the hardware, software along with its valid licenses, and any data collected during the contract period would be of PFCCL and AMISP would assist PFCCL in transfer of the same to the Utility at the end of the Contract Period on 'as-is-where-is' basis to facilitate seamless operation of Utility businesses. If the licenses are perpetual, they would be simply transferred to the Utility at the end of the Contract Period. In the event perpetual licenses are not available and the AMISP has procured period licenses, the Utility will take over on payment of license fees at the end of the Contract Period.

The scope of work of the AMISP shall cover end-to-end metering (from Feeders, Distribution Transformers (DTs) and all end consumers) (i.e. design, procure, supply, install, test, commission, integration and operation & maintenance) in the selected AMI Project

area to enable complete energy accounting with zero manual intervention. The AMI Project shall include:

- a) Deployment of Smart Meters (with provision of Pre-paid mode which can be configured to post –paid and vice-versa)
- b) AMI communication systems which include the following:
 - i. Hybrid communication technology (RF/ GPRS) Primarily based on RF and wherever RF is not feasible GPRS based communication shall be established
 - ii. Head End System (HES) to acquire data from various end points remotely (i.e. avoiding any human intervention) and monitor parameters acquired from meters
- c) Meter Data Management System (MDMS) which shall support storage, archiving, retrieval & analysis of meter data and various other MIS along with validation & verification algorithms. It shall act as a central data repository with interactive dashboard. MDMS shall have capability to import raw or validated data in defined formats and export the processed and validated data to various other systems sources and services in the agreed format. It shall provide validated data for upstream systems such as billing, analytics, reporting, etc. MDMS would also support integration of future ERP systems as well as future smart grid functionalities like consumer information system, customer care, network planning & analysis, load analysis/forecasting, Peak Load Management, Outage Management System, Distribution Transformer Monitoring system, self-healing system etc.
- d) Cloud Service to host the HES, MDM and Web Applications.
- e) A new IT billing system replacing the existing proprietary system which would preferably accommodate the NIC cloud payment system and utilize the existing IT software and infrastructure wherever possible (in discussion the Utility) and shall address the gaps required to implement the project. Further, the new billing system would support integration of the existing

Smart Grid Pilot AMI system, SCADA/DMS system provided under R-APDRP project and Rural feeder monitoring system so as to utilize the resources effectively. The new IT Billing System shall be fully integrated with the entire AMI system. The Billing System Provider shall share the source code to PFCCL/Utility

- f) Integration with billing systems, and existing legacy systems. Details of legacy systems are provided in section 3.2:
- g) Mobile App through which consumer shall be able to log in through android/ iOS/ Window based mobile app to see information related to their energy consumption
- h) Development of standard interfaces to enable integration of future IT/ OT applications with the AMI system.
- i) Site survey of consumers and DTs using GIS tools to get the GIS coordinates of the consumers and all meter locations. The survey shall include the pole & DT wise mapping of consumers so as to have DT wise, Feeder wise, substation wise, section wise etc. energy audits. Utility has conducted the GIS mapping of around 1.9 lakh consumers and associated network elements in the urban area under R-APDRP scheme and the AMISP shall require mapping for the balance consumers and update the existing data for any changes.
- j) The AMI Project shall be transferred to the Utility at no cost at the end of the term of the Contract on as-is whereis basis.

1 (mm)

The Electricity Department, UT of Puducherry is a deemed licensee under Section 14 of the Electricity Act, 2003 responsible for carrying out the business of transmission, distribution and retail supply of electricity in the UT of Puducherry.

The area under supply comprises of four regions namely Puducherry, Karaikal, Mahe and Yanam, which are not geographically contiguous and are spread over an area of 492 sq. km. The basic profiles of four regions are as follows:

a) Puducherry is the largest among the four regions and consists of 12 scattered areas interspersed with enclaves of Villupuram and Cuddalore Districts of Tamil Nadu.

Section 3. Instruc	tions to Bidders and Bid	dders 63	
	by Naga State. c) Mahe lie west coa d) Yanam is in the Ea e) Bill collect	is about 150 km south of Puducherry and is bounded apattinam and Thiruvarur Districts of Tamil Nadu is almost parallel to Puducherry 653 km away on the st near Kannur District of Kerala State. Is located about 840 km north-east of Puducherry and st Godhavari District of Andhra Pradesh State. It ction centres are functioning in each of the 41 O&M by which consumers are paying the bills in addition modes	
2.2	Procurement (e-	RFP shall be conducted through/ with Electronic – Procurement/ e- Tendering) System. se the following Electronic-Procurement system to	
	manage this Req	uest for Proposal (RFP) process:	
	www.mstcecommerce.com/eprochome/pfccl		
The electronic-procurement system shall be used to main following part of the RFP process:			
	issuing RFP, corrigendum/ addendums, submissions o Proposals, opening of Proposals etc.		
	process a detaile e-Bidding has	ilitate the Bidders on e-Procurement/ e-Tendering ed manual on the same titled Bidder Help Manual for been provided annexed to the Bid Data Sheet as S) . The same may be utilized by the Bidders.	
2.2.2	Name	Sh. Anupam Kashyap	
2.2.2	Designation	Chief Manager	
	Address	7 th Floor, A-Wing, Statesman House, Connaught Place, New Delhi – 110 001	
	Tel	011-23443712	
	Email	anupam kashyap@pfcindia.com	
2.3	Infrastructure	e Contract is : Appointment of Advanced Metering ("AMI") Service Provider ("AMISP") for of Smart Prepaid Metering in UT of Puducherry	
2.4	Project: The sum	garding detail of existing systems relevant to the AMI mary of the existing system of the Utility as well as e instant AMI project is mentioned in Section 6	

A Pre-Bid Meeting will be held through Video Conferencing (VC) as per the details below.

Date of Pre-Bid Meeting: 20.12.2021

Time: 15:00 Hours (IST)

Telephone: 011-23443712, **Fax.** 011-23443990

E-mail: anupam_kashyap@pfcindia.com

Contact person/Meeting coordinator: Sh. Anupam Kashyap, Chief

Manager

Link for Pre-Bid Meeting will be made available seven days prior to

holding this meeting at www.pfcclindia.com

2.8 Format for Sending Query to Utility

[Query may be sent in hard copy to the Nodal Officer of PFCCL, at the below-mentioned address AND/ OR via email to E-mail ID]

[Reference No.]

From:

[Address of the Bidder]

[Telephone No., Fax No., Email]

[Date]

To:

Sh. Anupam Kashyap

Chief Manager

PFC Consulting Limited

7th Floor, A-Wing, Statesman House

Connaught Place, New Delhi - 110 001

Sub: Query.

Ref: RfP No. Smart_Metering/Puducherry/2021 dated 03.12.2021 for Appointment of Advanced Metering Infrastructure ("AMI") Service Provider ("AMISP") for implementation of Smart Prepaid Metering in UT of Puducherry.

Dear Sir/ Madam,

Please find below our query with respect to the RFP subject to the terms and conditions therein:

Sr.	Reference Clause No.	Page No.	Query
1.			
2.			
3.			

Thanking you,

Yours Sincerely,
[Insert Signature here]
[Insert Name here]
[Insert Designation here]

B. Preparation of Proposals

10.1 Document Checklist and List of Forms

Sr. No	Document	RFP Section Reference
1.	Tender Fee	1,3
2.	List of Consortium Members and Subcontractor(s) (as applicable) as per the format prescribed in Form 1 given in Section 4	4
3.	Bidder Information as per the format prescribed in Form 2 given in Section 4	4
4.	Project Implementation Plan as per format provided in	4
5.	Curriculum Vitae of key personnel as per format provided in Form 4 and Form 5 given in Section 4	4
6.	Bid Security in the form of Demand Draft or Bank Guarantee as per format prescribed in Form 6 given in	4
7.	Covering Letter for Submission of Bid by Sole Bidder / Lead Consortium Member as per format prescribed in Form 7 given in Section 4	4
8.	Consortium Agreement Format entered amongst all Members of the Bidding Consortium as per format prescribed in Form 8 given in Section 4	4
9.	Power of Attorney by each Consortium Member in favour of Lead Consortium Member as per format prescribed in Form 9 given in Section 4	4
10.	Power of Attorney by Lead Consortium Member/ Sole Bidder authorizing an Individual Designated Representative for the Consortium/ Bidder as per the format prescribed in Form 10 given in Section 4	4
11.	Letter of Consent by each Consortium Member reviewing each element of the Bid as per format prescribed in 1 given in Section 4	4

Section 5. Instruct	ions to L	didders and bidders	00	
	12.	For Lead Member in case of Consortium Bidding / Sole Bidder Experience [Refer Clause 8.1 in Section		
		 i. References along with requisite contract/ Purchase Order (PO)/ Work Order (WO). The references should indicate client name, scope of work, Project start date (as per the format prescribed in Form 13 given in Section 4); ii. Documentary evidence of Project completion such as client completion certificate, proof of payment received and client certificate of delivery of material, proof of asset capitalized in books of accounts (as applicable)/ and similar proofs along with contact details of the client. The Lead Member/ Sole Bidder shall submit latest satisfactory performance certificate, issued by utilities at least three months prior to the bid submission date and the smart meters should have been operational for at least one year from the bid submission date. 	4	
	13.	For System Integration Experience [Refer Clause 8.1 in Section 2]: i. References along with requisite contract/ Purchase Order (PO)/ Work Order (WO). The references should indicate client name, scope of work, Project start date (as per the format prescribed in Form 13 given in Section 4); ii. Documentary evidence of completion of the Project or completion of Go-Live status (i.e. Go-live certificate, UAT testing certificate etc.) or other documentary evidence indicating completion (e.g. proof of payment received and client certificate for supply of material or similar proofs) along with contact details of the client; iii. Client certificate and other documentation for implementation performance/ operation.	4	
	14.	For Financial Strength [Refer Clause 8.1 in Section 2]:Audited Annual financial statements, Balance Sheet and P&L Account of all Consortium Members/ Sole Bidder for the respective Financial Years as per the format prescribed in Form 13		
	15.	List of Material and Service as per format provided in Form 14 given in Section 4	4	

Section 3. Instri	actions to blude	As and Bladers	6/	
	giv	ble of Compliance as per format provided in Form 15 ren in Section 4 nancial Bid as per format provided in Form 1 given in	5	
1	Section 5			
	Fo	rformance Security as per the format prescribed in rm 1 given in Section 8	8	
1		tter of Award as per the format prescribed in Form 2 ren in Section 8	8	
	21 Co	py of this RFP with sign and official seal on every page	1 to 8	
	22 Fo	rmat for Sending Query to Utility for clarification	3	
12.1	the Bid S	The Bid shall remain valid until i.e. upto and 180 days reckoned from the Bid Submission Deadline specified in ITB 17, as may be extended by PFCCL.		
12.2	is:	Currency and the amount of Bid Security to be furnished by the Bidder is: Currency: INR		
	_	Amount: 6,00,00,000		
12.3(a)		Banks by whom Bank Guarantee is required to be issued: Any Commercial Bank		
12.3(a)		Bid Security may be furnished in other forms mentioned below: Not Applicable		
		Clarifications may be requested no later than 15 Days prior to the Bid Submission Deadline. Request to be sent at:		
13.1	Submissi	ion Deadline.	to the Bid	
13.1	Submissi	to be sent at:	to the Bid	
13.1	Submissi Request Name	to be sent at: Sh. Anupam Kashyap	to the Bid	
13.1	Submissi Request Name Designa	to be sent at: Sh. Anupam Kashyap ation Chief Manager		
13.1	Submissi Request Name	to be sent at: Sh. Anupam Kashyap ation Chief Manager s 7 th Floor, A-Wing, Statesman	to the Bid	
13.1	Name Designa Addres	to be sent at: Sh. Anupam Kashyap ation Chief Manager s 7 th Floor, A-Wing, Statesman Connaught Place, New Delhi – 110 001		
13.1	Submissi Request Name Designa	to be sent at: Sh. Anupam Kashyap ation Chief Manager s 7 th Floor, A-Wing, Statesman		

Section 3. Ins	structions to Bidders and	d Bidders 68	
15.13	Number of ye	ears : 10 years	
16.4	limited to Rs.	quivalent to 22.5% of the cost of meters (including GST) 1350 per meter would be paid to AMISP out of Govt. of rovided to the Utility as per the payment terms defined in	
	C. Sub	mission, Opening and Evaluation	
17.3	1 no. of hard	the electronic submission, the Bidder shall also provide copy/(ies) of the original/ revised (if any) Technical Bid	
17.4	The hard co Registered P courier which Deadline. The sealed e attested doc	a sealed envelope before the Bid Submission Deadline py of the Technical Bid shall be sent to PFCCL via ost with Acknowledgement Due (RPAD), speed post or h should reach PFCCL before the Bid Submission envelope shall contain hard copies of all original and/ or uments submitted in the physical submission of the d. The separate sealed envelope shall also contain the	
		I copies of the Tender Fee and Bid Security.	
17.6	Smart_Metern of Advanced ("AMISP") for Puducherry" The sealed e Consortium Mathematical Bid In case of documents a envelope, the contained the Insufficiency compensated additionally in envelope.	The sealed envelope shall be clearly marked on the top as "RFP no. Smart_Metering/Puducherry/2021 dated 03.12.2021 for Appointment of Advanced Metering Infrastructure ("AMI") Service Provider ("AMISP") for implementation of Smart Prepaid Metering in UT of Puducherry" The sealed envelope shall be addressed to the PFCCL. The sealed envelope shall also clearly mention the name of the Lead Consortium Member/ Sole Bidder submitting the Bid. The sealed envelope shall not contain the Financial Bid. The Financial Bid shall only be submitted electronically. In case of discrepancy between the electronically submitted documents and the physically submitted documents in the sealed envelope, the electronically submitted documents and the information contained therein shall prevail and be treated as the final submission. Insufficiency of the electronically submitted Bid shall not be compensated by any information, documentation or material provided additionally in the physically submitted documents in the sealed envelope. Sealed Envelope(s) to be addressed to:	
	Name	Sh. Anupam Kashyap	
	Designation	Chief Manager	
	Address	7 th Floor, A-Wing, Statesman House, Connaught Place, New Delhi – 110 001	
	Tel	011-23443712	
	Email	anupam kashyap@pfcindia.com	

17.10	The Bid Submission Deadline is: Date: 17.01.2022 Time: 15:00 hrs
19.1	The Technical Bids/ Proposals shall be opened as indicated below: The opening shall take place through the bid opening meeting to be held over a Video Conferencing on: Date: 17.01.2022 Time: 16:00 hrs Link for the bid opening meeting will be made available at least 7 Days prior to the Bid Opening event, at PFCCL's website www.pfcclindia.com

Annexure I (BDS)


Bidder Help Manual for E-Bidding HELP LINE TO VENDORS

30. Bidder's Guide for Submitting Bid on MSTC's E-Procurement Portal

The following section is meant only to provide guidance to bidders about the eprocurement Portal of MSTC. These guidelines are subject to change from time to time depending on the development of the portal.

Bidders have to visit the website https://www.mstcecommerce.com. The steps to be followed are as follows:

1. Select e-procurement option then click on PSUs/Govt. department.

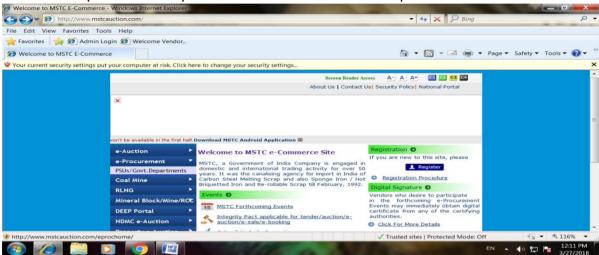

2. Click on the name of the Buyer (i.e. PFCCL) where you wish to login.




3. The following screen shall appear:




4. On the right side of the page click on Register as a Vendor:




5. Fill the form that appears to create username and password.

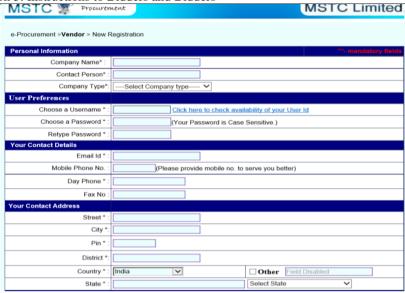


Once the registration is done, login with your user name and password:

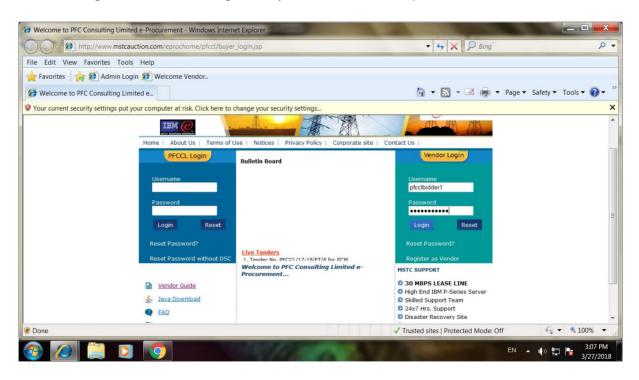

7. The system shall ask for your DSC as below

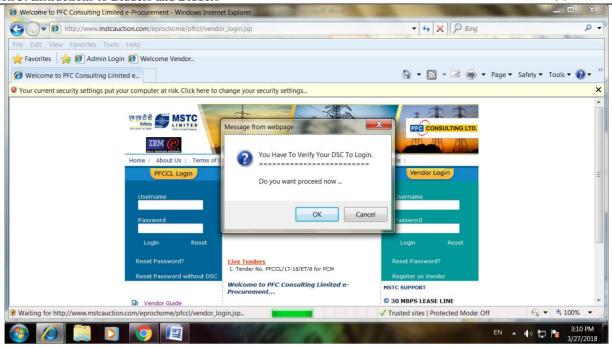

8. Click on OK and select your DSC for authentication. When you are logging into the system for the first time, system shall verify the name of the person to whom the DSC has been issued and the name of the contact person provided during registration for the user id being used for logging in. If the two names match, system will map the user id with the DSC without any prompt. If the two names don't match, system will give an alert stating that the two names are different and will ask you to confirm that the DSC being used is the correct DSC for the user id. If you proceed with the DSC, system will automatically change the contact person's name to match with the DSC Issued to name and will map the DSC with the user id for future use. For all subsequent logins, system will check if the correct pair of user id and DSC are being used or not and will allow login only if the correct pair of DSC and user id are used. Else, system will prevent you from logging into the system.

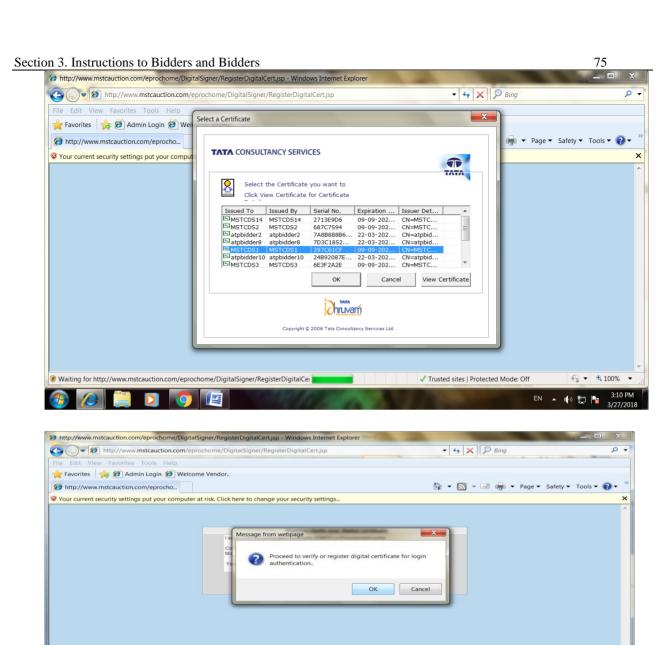


EN 🔺 🌓 🔚 😼 3/27/2


9. Your digital signature will be verified



10. Once login is complete, a bidder can access My Menu through the left side of the page:

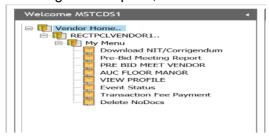


11. Here click on Download NIT/Corrigendum button to download the NIT/Corrigendum. Select Event number and click on download to download the files:

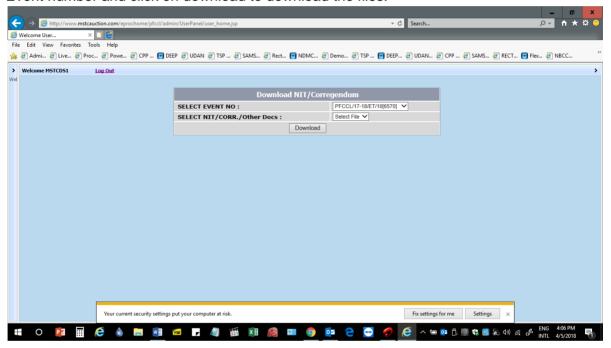


12. After going through NIT, a bidder will be required to submit the transaction fee of MSTC before submitting the bid. To submit transaction fee click on transaction fee payment and select tender number. The transaction fee amount will be input by the system automatically. A bidder can deposit the transaction fee through Debit Card/Credit card/Net Banking by selecting the online payment option or through NETF/RTGS. Payment through online mode is authorized immediately while through NEFT/RTGS is authorized by the system upon receipt of payment (this can take approx. 1 working day).




13. After the transaction fee is paid a bidder can proceed to Auc-Floor Manager through the left side My menu. In Auc floor manager click on live events to view a list of Live events. In live events select the tender number where you wish to submit a bid.

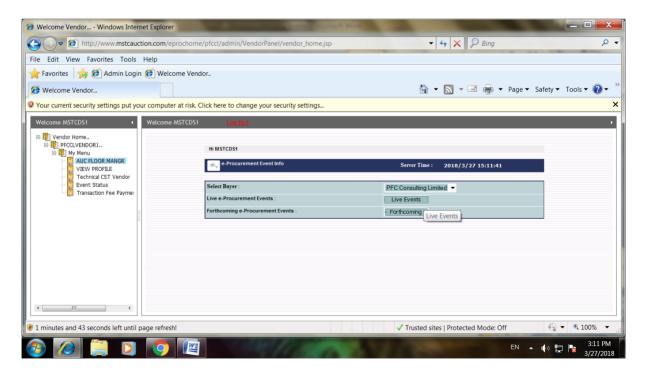


14. Select the events on which want to bid.

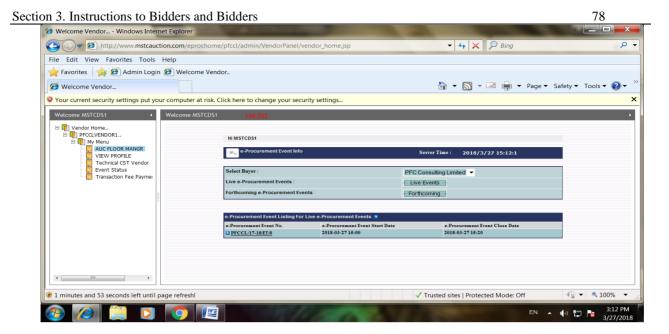


15. Click on Process to sign your acceptance then select your DSC.

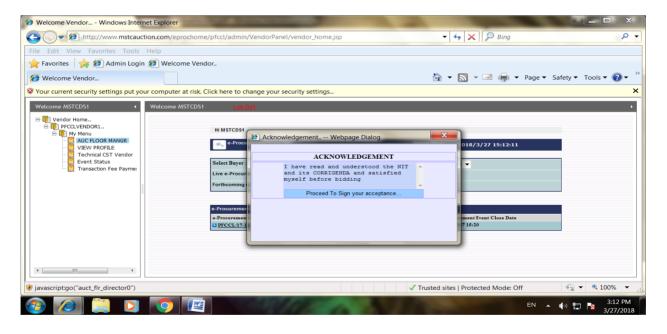

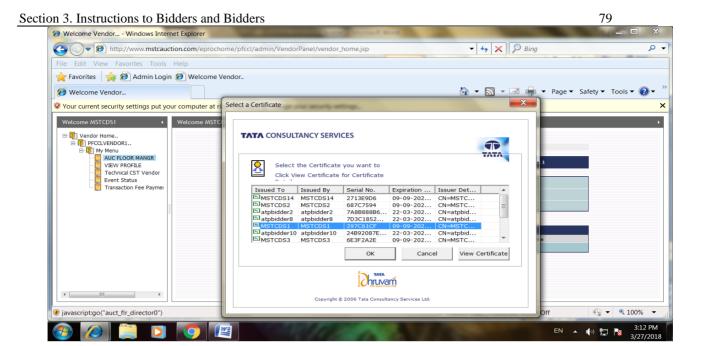


16. Next the auction floor manager will be visible:

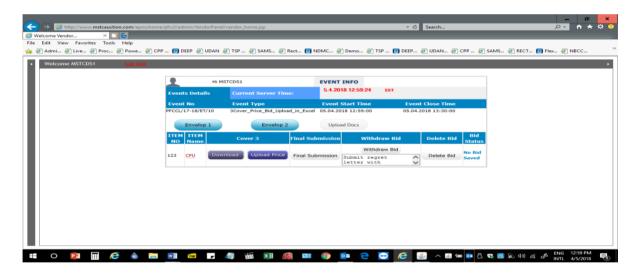


17. Click on envelop 1 to fill up commercial terms and click Save to submit.



18. Click on envelop 2 to submit techno commercial part of the bid. Fill up detail as below for example showing below and click Save $\rightarrow ok$.

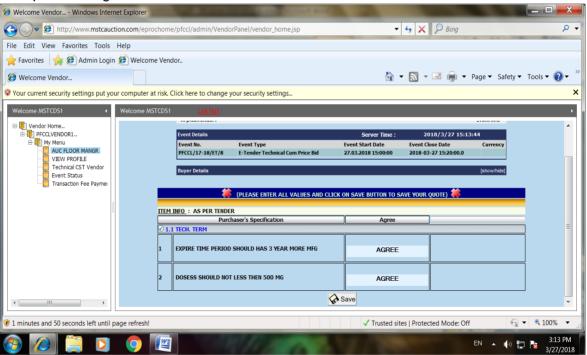


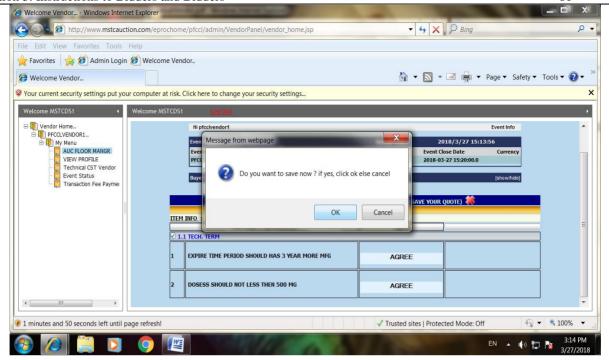


19. Click on download in cover 3 to download the excel format for filling price bid. Download it and fill it without changing the name of the file. Once finished, click on upload price button to upload the price bid.




20. Click on upload Docs → select cover, then file from browser → upload. Please note that price bid excel does not have to be uploaded here. It has to be uploaded only in Cover 3 as explained above.

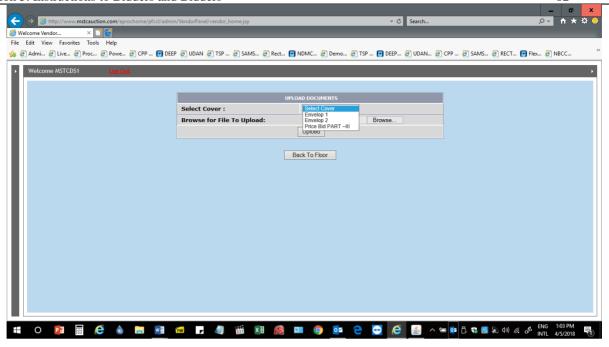

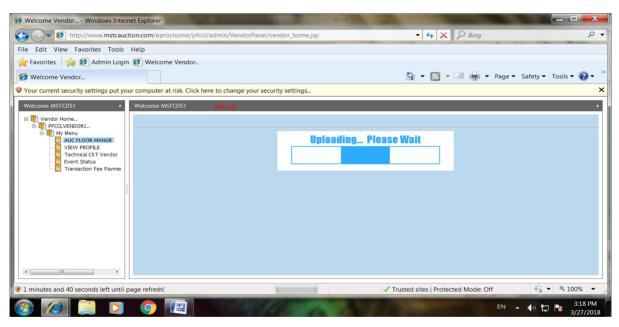





21. Come back to floor and Click on Final submission → allow access to the application → Allow

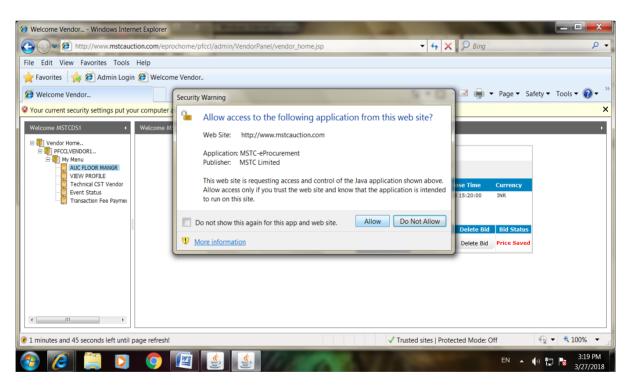

22. Click on process to sing your Bid and select your DSC→Ok

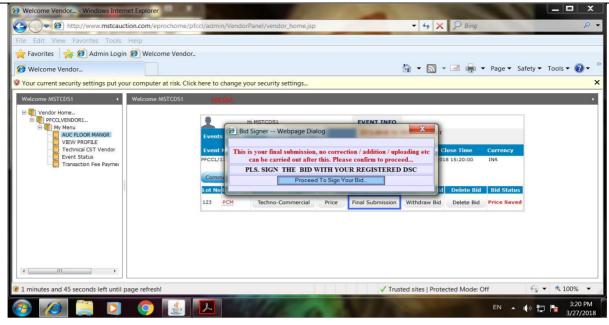

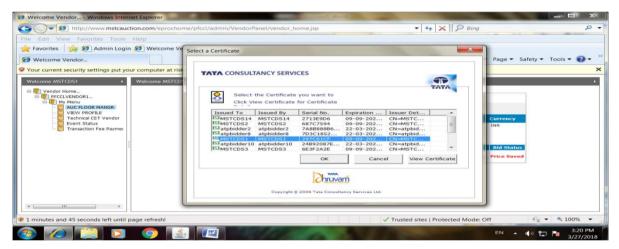

23. Bid will be submitted finally and Screen will look like it.



Note:

In case of any amendments after final submit, click on delete bid button to delete the technocommercial and price bids and resubmit the same. Please note that at the end the bid must be final submit, otherwise the same will not be considered.

Section 4. Bidding Forms- Technical Proposal

CHECKLIST OF REQUIRED FORMS

This Checklist shall be filled in and submitted by the bidder along with the Technical Bid. Except Form 1 given in Section 5 (to be completed and submitted by the Bidder in the Financial Bid) all other documents/ forms duly filled and complete in all respect are to be submitted by the Bidder in the Technical Bid.

S. No.	Document	Attached? (Yes/ No)	For Official Use
1.	Tender Fee		
2.	List of Consortium Members and Subcontractor(s) (as applicable) as per the format prescribed in Form 1 given in Section 4		
3.	Bidder Information as per the format prescribed in Form 2 given in Section 4		
4.	Project Implementation Plan as per format provided in Form 3 given in Section 4		
5.	Curriculum Vitae of key personnel as per format provided in Form 4 and Form 5 given in Section 4		
6.	Bid Security in the form of Demand Draft or Bank Guarantee as per format prescribed in Form 6 given in Section 4		
7.	Covering Letter for Submission of Bid by Sole Bidder / Lead Consortium Member as per format prescribed in Form 7 given in Section 4		
8.	Consortium Agreement Format entered amongst all Members of the Bidding Consortium as per format prescribed in Form 8 given in Section 4		
9.	Power of Attorney by each Consortium Member in favour of Lead Consortium Member as per format prescribed in Form 9 given in Section 4		
10.	Power of Attorney by Lead Consortium Member/ Sole Bidder authorizing an Individual Designated Representative for the Consortium/ Bidder as per the format prescribed in Form 10		
11.	Letter of Consent by each Consortium Member reviewing each element of the Bid as per format prescribed in Form 1 given in Section 4		

Section	on 4. Bidding Forms-Technical Proposal		88
12.	For Lead Member in case of Consortium Bidding / Sole Bidder Experience [Refer Clause 8.1 in Section 2]:		
	i. References along with requisite contract/ Purchase		
	Order (PO)/ Work Order (WO). The references should		
	indicate client name, scope of work, Project start date		
	(as per the format prescribed in Form 13 given in		
	Section 4);		
	ii. Documentary evidence of Project completion such as		
	client completion certificate, proof of payment received		
	and client certificate of delivery of material, proof of		
	asset capitalized in books of accounts (as applicable)/		
	and similar proofs along with contact details of the		
	client.		
13.	For System Integration Experience [Refer Clause 8.1 in Section		
	2]:		
	i. References along with requisite contract/ Purchase Order		
	(PO)/ Work Order (WO). The references should indicate client		
	name, scope of work, Project start date (as per the format		
	prescribed in Form 13 given in Section 4); ii. Documentary evidence of completion of the Project or		
	completion of Go-Live status (i.e., Go-live certificate, UAT		
	testing certificate etc.) or other documentary evidence indicating		
	completion (e.g., proof of payment received and client certificate		
	for supply of material or similar proofs) along with contact details		
	of the client;		
	iii. Client certificate and other documentation for implementation		
	performance/ operation.		
14.	For Financial Strength [Refer Clause 8.1 in Section 2]: Audited		
	Annual financial statements, Balance Sheet and P&L Account of		
	all Consortium Members/ Sole Bidder for the respective		
	Financial Years as per the format prescribed in Form 12 given in		
	Section 4		
15.	List of Material and Services as per format provided in Form 14		
	given in Section 4		
16.	Table of Compliance as per format provided in Form 15 given in		
	Section 4		
17.	Format for Technical & Financial Requirement- Relationship &		
'''	Details of Equity Shareholding (Form 16)		
	Details of Equity officionologing (Form 10)		
18.	Authorization from Parent / Affiliate of Sole Bidder / Member of		
	Bidding Consortium whose technical / financial capability has		
	been used by the Sole Bidder / Member of Bidding Consortium		
	(Form 17).		
19.	Format of Undertaking by Technically/ Financially Evaluated		
-	Entity(ies) OR Undertaking from the Ultimate Parent Company.		
	for total equity investment commitment, in the prescribed format		
	in Form 18, to meet any shortfall in the equity investment by the		
	Selected Bidder in the SPV.		
20.	Formats for Board Resolutions		
	1	l .	l

21.	Copy of this RFP with sign and official seal on every page	

Form 1: List of Consortium Members/ Sub-Contractor(s)

[The Bidder shall identify below the Consortium Members/ Sub-contractor(s) for major Project items. For sub-contractor a Letter of Intent must be provided.]

Major Project Item	Proposed Consortium Member / Sub- Contractor(s)	Nationality
Meter Manufacturer (if any)		
Communication Provider (if any)		
System Integrator (if any)		
MDM Provider (if any)		
HES Provider (if any)		
Cloud Service Provider/ Managed Service Provider (if any)		
[Other] (if any)		

Form 2: Bidder Information

[Sole Bidder/ all Consortium Members must provide all documents required to prove/ substantiate its Eligibility as required in Eligibility Criteria Clause 4.3. for each Consortium Member]

S.No.	Information Requirement	Details
1	Company Name and Details	
2	Address of its place of business in India	
3	List of board of directors or regulating/controlling	
	body	
4	Attested copy of Certificate of Registration/	
	Incorporation issued by the Registrar of	
	Companies	
5	Memorandum and Articles of Association or	
	document constituting the company and	
	regulating its affairs	
6	Certificate of Commencement of Business issued	
	by the Registrar of Companies	
7	Copy of the Goods and Services Tax (GST)	
	Registration Certificate	
8	Provident Fund (PF) Certificate indicating PF	
	Code	
9	Copy of Permanent Account Number (PAN) Card	
10	Copy of the Goods and Services Tax (GST)	
	Registration Certificate	
11	Audited annual financial statements and financial	
	Net worth for the last three years	
12	Any other papers or documents required by Utility	
	at a later stage or in future	

Form 3: Project Implementation Plan

The Bidder shall submit a preliminary Project implementation plan along with the Bid which shall include at least the following activities:

- a) Understanding of Utility and its requirement with respect to Project implementation;
- b) Overall system architecture and system philosophy capable of scale-up;
- c) Details of proposed methodology;
- d) Schematic Diagram of Proposed System Configuration
- e) An approach paper documenting the interfaces for integration with existing and future applications based on the information provided by utility
- f) Project team structure;
- g) Line of Credit / Source of funding and supporting documents;
- h) Governance Framework;
- i) Resource planning and estimation;
- j) Risk planning;
- k) Quality Assurance Program;
- I) Data Privacy Approach;
- m) Cyber Security Approach;
- n) Site Survey;
- o) Installation & Field update schedule;
- p) Repair and Maintenance Schedule including details on Spares Management;
- q) Training schedule;

Form 4: Bidder's Representative and Key Personnel

[Bidders should provide the names and details of the suitably qualified Contractor's Representative and Key Personnel to perform the AMISP Contract. The data on their experience should be supplied using the Form 5 given in Section 4 below for each candidate.]

ijaate.j					
Title of position: Project Manager					
Name of candidat	Name of candidate:				
Duration of appointment:	[insert the whole period (start and end dates) for which this position will be engaged]				
Time commitment: for this position:	[insert the number of days/week/months/ that has been scheduled for this position]				
Expected time schedule for this position:	[insert the expected time schedule for this position (e.g. attach high level Gantt chart]				
Title of position: [System Integration Specialist]				
Name of candidat	e:				
Duration of appointment:	[insert the whole period (start and end dates) for which this position will be engaged]				
Time commitment: for this position:	[insert the number of days/week/months/ that has been scheduled for this position]				
Expected time schedule for this position:	[insert the expected time schedule for this position (e.g. attach high level Gantt chart]				
Title of position: [Cyber Security Specialist]					
Name of candidate:					
Duration of appointment:	[insert the whole period (start and end dates) for which this position will be engaged]				
Time commitment: for this position:	[insert the number of days/week/months/ that has been scheduled for this position]				
Expected time schedule for this position:	[insert the expected time schedule for this position (e.g. attach high level Gantt chart]				
Title of position: [Communication Technology Specialist]				
Name of candidat	e:				
Duration of appointment:	[insert the whole period (start and end dates) for which this position will be engaged]				
	Title of position: F Name of candidat Duration of appointment: Time commitment: for this position: Expected time schedule for this position: Title of position: [Name of candidat Duration of appointment: Time commitment: for this position: Expected time schedule for this position: Title of position: [Name of candidat Duration of appointment: Time commitment: for this position: Title of position: [Name of candidat Duration of appointment: Time commitment: for this position: Expected time schedule for this position: Title of position: [Name of candidat Duration of				

Time	[insert the number of days/week/months/ that has been
commitment: for	scheduled for this position]
this position:	
Expected time	[insert the expected time schedule for this position (e.g. attach
schedule for	high level Gantt chart]
this position:	-

Form 5: Resume and Declaration

Name of Bidder:		

Position [#1]	: [title of position]			
Personnel information	Name:	Date of birth:		
	Address:	E-mail:		
	Professional qualification	ns:		
	Academic qualifications:			
	Language proficiency: [language and levels of speaking, reading and writing skills]			
Details				
	Address of employer:			
	Telephone:	Contact (manager / personnel officer):		
	Fax:			
	Job title:	Years with present employer:		

Summarize professional experience in reverse chronological order. Indicate technical and managerial experience relevant to the Project.

Project	Role	Duration of involvement	Relevant experience
[main project details]	[role and responsibilities on the project]	[time in role]	[describe the experience relevant to this position]

Declaration

I, the undersigned [insert either "Contractor's Representative" or "Key Personnel" as applicable], certify that to the best of my knowledge and belief, the information contained in this Form 5 correctly describes myself, my qualifications and my experience.

I confirm that I am available as certified in the following table and throughout the expected time schedule for this position as provided in the Bid:

Commitment	Details
Commitment to duration of	[insert period (start and end dates) for which this
contract:	Contractor's Representative or Key Personnel is
	available to work on this contract]

Time commitment:	[insert period (start and end dates) for which this	
	Contractor's Representative or Key Personnel is	
	available to work on this contract]	

I understand that any misrepresentation or omission in this Form may:

- (a) be taken into consideration during Bid evaluation;
- (b) result in my disqualification from participating in the Bid;
- (c) result in my dismissal from the contract.

Name of Contractor's Representative or Key Personnel: [insert name]
Signature:
Date: (day month year):
Countersignature of authorized representative of the Bidder:
Signature:
Date: (day month year):

Reference No.

Dated:

Form 6: Format of Bank Guarantee for Bid Security

Bank Guarantee No.

[То	be	on	noi	n-judicia	al sta	amp	pape	r oi	f Rup	ees	One	Hun	dred	Only	(INR	100/-)	or ap	propriate
valu	e a	as	per	Stamp	Act	rele	vant	to p	olace	of	execu	tion,	duly	signe	ed on	each	page.	Foreign
entit	ies	sui	bmit	ting Bi	d are	req	uired t	o fo	ollow t	the .	applica	able l	aw in	their	counti	y]		

To: Sh. Anupam Kashyap Chief Manager PFC Consulting Limited 7 th Floor, A-Wing, Statesman House Connaught Place, New Delhi – 110 001
Dear Sir/ Madam,
WHEREAS
And WHEREAS a Bank Guarantee for [Amount] valid [Date] is required to be submitted by the Bidder along with the RFP.
We,
We [Insert name of the Bank] also agree that withdrawal of the Bid or part thereof by the Bidder within its validity or non-submission of Performance Security by the Bidder within the

stipulated time of the Letter of Award to the Bidder or any violation to the relevant terms stipulated in the RFP would constitute a default on the part of the Bidder and that this Bank Guarantee is liable to be invoked and encashed within its validity by PFCCL in case of any occurrence of a

default on the part of the Bidder and that the amount is liable to be forfeited by PFCCL.

NOTWITHSTANDING anything contained hereinbefore, our liability under this guarantee is restricted to [Amount]. Our Guarantee shall remain in force till [Date]. Unless demands or claims under this Bank Guarantee are made to us in writing on or before [Date], all rights of the Beneficiary under this Bank Guarantee shall be forfeited, and we shall be released and discharged from all liabilities there under.

[Insert the address of the Bank with complete postal branch code, telephone and fax numbers, and official round seal of the Bank]	[Insert signature of the Bank's Authorized Signatory]
Attested	
[Signature] (Notary Public)	
Place:	Date:

INSTRUCTIONS FOR SUBMITTING BANK GUARANTEE

- 1. Bank Guarantee to be executed on non-judicial stamp paper of appropriate value as per Stamp Act relevant to place of execution. Foreign entities submitting Bids are required to follow the applicable law in their country.
- 2. The Bank Guarantee by Bidder shall be given from any Scheduled Commercial Bank.
- 3. The full address along with the Telex/Fax No. and e-mail address of the issuing bank to be mentioned.

Form 7: Format of Covering Letter by Lead Consortium Member/ Sole Bidder for Submission of Bid

[Covering Letter shall be on the official letterhead of the Lead Consortium Member of the Bidding Consortium/ Sole Bidder]

[Reference No.]
From:
[Address of the Lead Consortium Member/ Sole Bidder]
[Telephone No., Fax No., Email]
[Date]

To:
Sh. Anupam Kashyap
Chief Manager
PFC Consulting Limited
7th Floor, A-Wing, Statesman House
Connaught Place, New Delhi – 110 001

Sub: Bid for Appointment of Advanced Metering Infrastructure ("AMI") Service Provider ("AMISP") for implementation of Smart Prepaid Metering in UT of Puducherry

Ref: RfP No. Smart Metering/Puducherry/2021 dated 03.12.2021

Dear Sir/ Madam,

We, the undersigned [Insert name of the Lead Consortium Member/ Sole Bidder] having read, examined and understood in detail the RFP for Appointment of Advanced Metering Infrastructure ("AMI") Service Provider ("AMISP") for implementation of Smart Prepaid Metering in UT of Puducherry hereby submit our Bid comprising of Technical and Financial Bids.

1. We give our unconditional acceptance to the RFP including but not limited to all its instructions, terms and conditions, and formats attached thereto, issued by PFCCL, as amended. In token of our acceptance to the RFP, the same have been initialed by us and enclosed to the Bid. We shall ensure that our Consortium shall execute such requirements as per the provisions of the RFP and provisions of such RFP shall be binding on us.

2. Fulfilment of Eligibility

We undertake that we fulfil the Eligibility Criteria stipulated in the RFP and fulfil all the eligibility requirements as the Lead Consortium Member/ Sole Bidder as outlined in the RFP.

We hereby confirm that in accordance with Clause 7 of Section 2 of the RFP, we are
herewith submitting legally binding undertaking supported by a board resolution from the
[insert name of Technically Evaluated Entity and/or Financially
Evaluated Entity or its Ultimate Parent Company, as the case may be] that all the equity
investment obligations of [insert name of the Sole Bidder/ Lead
Consortium Member] shall be deemed to be equity investment obligations of the
[insert name of Technically Evaluated Entity and/or Financially
Evaluated Entity or its Ultimate Parent Company, as the ease may be] and in the event of
any default by [insert name of the Sole Bidder/ / Lead Consortium
Member], the same shall be met by [insert name of Technically
Evaluated Entity and/or Financially Evaluated Entity or its Ultimate Parent Company, as
the case may be].

[To be inserted only in ease the Bidder has sought qualification on the basis of technical and financial capability of its Affiliate(s) and/or its Parent]

3. Bid Security

We	have	enclosed	a Bid S	ecurity of	[Amount]	in the	form c	of a Bank	Guarante	e No.
		[Inse	rt Bank	Guara.	ntee Nur	mber]	(OR	Demand	Draft)	dated
		[Insert o	date of th	e Bank G	Guarantee]	as per	Form (6 given in	Section 4	l from
		[Insert r	name of B	ank provid	ding Bid Bo	nd] and	valid ι	ip to [Date]		

4. No Deviation

We have submitted our Financial Bid strictly as per terms and formats of the RFP, without any deviations, conditions and without mentioning any assumptions or notes for the Financial Bid in the said format.

5. Acceptance

We hereby unconditionally and irrevocably agree and accept that the decision made by PFCCL in respect of any matter regarding or arising out of the RFP shall be binding on us. We hereby expressly waive any and all claims in respect of Bid process.

We confirm that there are no litigations or disputes against us, which materially affect our ability to fulfil our obligations with regard to fulfilling our obligations as per the RFP.

6. Familiarity with Relevant Indian Laws and Regulations

We confirm that we have studied the provisions of the relevant Indian laws and regulations as required to enable us to submit this Bid and execute the RFP Documents, in the event of our selection as Selected Bidder. We further undertake and agree that all such factors as mentioned in the AMISP Contract have been fully examined and considered while submitting the Bid.

7. Contact Person

Details of the contact person representing our Bidding Consortium/ Sole Bidder (registered Company) supported by the Power of Attorney prescribed in Form 10 given in Section 4 of the RFP are furnished as under:

ame:	
esignation:	
ompany:	
ddress:	
obile:	
hone:	
ax:	
mail:	

- a. We are submitting herewith the Technical Bid containing duly signed formats, both in electronic and physical forms, (duly attested) as desired by you in the RFP for your consideration.
- b. We are also submitting herewith the Financial Bid in electronic form only, as per the terms and conditions in the RFP.
- 8. It is confirmed that our Bid is consistent with all the requirements of submission as stated in the RFP and subsequent communications from PFCCL.
- 9. The information submitted in our Bid is complete, strictly as per the requirements stipulated in the RFP and is correct to the best of our knowledge and understanding. We would be solely responsible for any errors or omissions in our Bid.
- 10. We confirm that all the terms and conditions of our Bid are valid for acceptance for a period of 1 (one) year from the Bid Submission Deadline.

- 11. We confirm that we have not taken any material deviation so as to be deemed non-responsive with respect to the provisions stipulated in the RFP.
- 12. We confirm that no order/ ruling has been passed by any Competent Court or Appropriate Commission against us or any of our Consortium Members or in the preceding 1 (one) year from the Bid Submission Deadline for breach of any contract and that the Bid Security submitted by the us or any of our Consortium Members has not been forfeited, either partly or wholly, in any bid process in the preceding 1 (one) year from the Bid Submission Deadline.
- 13. We confirm that we are not currently blacklisted by any Govt. Organization or Regulatory Agencies or Govt. undertaking.
- 14. We are registered/ exempt from registering in accordance with applicable laws [Evidence of valid registration by the Competent Authority shall be attached if applicable]

Dated the	$$ [Ins ϵ	ert date of t	he month	day of	:	[Insert	month,	year] at
[/	Insert place].							

Thanking you, Yours Sincerely, [Insert Signature here] [Insert Name here] [Insert Designation here] Form 8: Format of Consortium Agreement to be entered amongst all Members of a Bidding Consortium

[To be on non-judicial stamp paper of Rupees One Hundred Only (INR 100/-) or appropriate value as per Stamp Act relevant to place of execution, duly signed on each page. Foreign entities submitting Bid are required to follow the applicable law in their country.]

FORM	1 OF CONSORTIUM AGREEMENT BETWEEN
M/s	, M/s, AND
	for bidding for RfP No. Smart_Metering/Puducherry/2021 dated
	.2021 (the "RFP") as per its Clause 4.3.2
1.	THIS Consortium Agreement (hereinafter referred to as "Agreement") executed on this [date] day of [month], [year] between
2.	M/s a company incorporated under the laws of and having its Registered Office at,
	(hereinafter called "Party 1," or "Lead Consortium Member" which expression shall include its successors, executors and permitted assigns);
3.	M/s, a company incorporated under the laws of
4.	M/s, a company incorporated under the laws of
5.	M/s a company incorporated under the laws of and having its Registered Office at, (hereinafter called "Party n," which expression shall include its successors, executors and permitted assigns);

[The Bidding Consortium should list the name, address of its registered office and other details of all the Consortium Members above.]

WHEREAS the Parties above named are entering into this Consortium Agreement for the purpose of submitting the Bid in response to the RFP and in the event of selection as Selected Bidder to comply with the requirements as specified in the RFP and ensure execution of the AMISP Contract as may be required to be entered into with PFCCL.

Party 1, Party 2, Party 3, ... and Party n are hereinafter collectively referred to as the "Parties" and individually as a "Party.

WHEREAS the RFP stipulates that the Bidders applying as a Bidding Consortium shall submit a legally enforceable Consortium Agreement in a format specified in the RFP, whereby each Consortium Member undertakes to be liable for its Roles and Responsibilities, provide necessary guarantees and pay required fees as required as per the provisions of the RFP, as specified herein.

WHEREAS any capitalized term in this Agreement shall have the meaning ascribed to such term in the RFP document.

NOW THEREFORE, THIS AGREEMENT WITNESSTH AS UNDER:

In consideration of the above premises and agreement all the Parties in this Consortium do hereby mutually agree as follows:

- 2. The Lead Consortium Member is hereby authorized by the Members of Consortium and Parties to the Consortium Agreement to bind the Consortium and receive instructions for and on behalf of all Members. The Roles and Responsibilities of all other members shall be as per the **Annexure** to this Agreement. In the event the Consortium is selected pursuant to the Bidding Process, the shareholding of all each of the Consortium Members in the AMISP shall be as under:

S. No	Name of the Bidding Company/ Member in case of a Bidding Consortium	Name of the Company investing in the equity of the SPV	Relationship with Sole Bidder / Member of the Bidding Consortium	% of equity participation in the SPV
1.	Lead Consortium			(Not Less than 51%)
	Members			
2.	Consortium Member 1			(Not Less than 10%)
3.	Consortium Member 2			(Not Less than 10%)
4.	Consortium Member 3			(Not Less than 10%)

5. Consortium Member 4 (Not Less than 10%)

- * In case the Bidder proposes to invest through its Affiliate(s) / Parent Company / Ultimate Parent Company, the Bidder shall declare shareholding pattern of such Affiliate(s) / Parent Company / Ultimate Parent Company and provide documentary evidence to demonstrate relationship between the Bidder and the Affiliate(s) / Parent Company / Ultimate Parent Company. These documentary evidence could be, but not limited to, demat account statement(s) / Registrar of Companies' (ROC) certification / share registry book, etc. duly certified by Company Secretary
- 3. Each Consortium Member undertakes to be individually liable for the performance of its part of the Roles and Responsibilities without in any way limiting the scope of collective liability envisaged in this Agreement in order to meet the requirements and obligations of the RFP. The Lead Consortium Member shall be liable and responsible for ensuring the individual and collective commitment of each of the Members of the Consortium in discharging all their respective Roles and Responsibilities.
- 4. In case of any breach of any of the commitment as specified under this Agreement by any of the Consortium Members, the Lead Consortium Member of the Consortium shall be liable to meet the obligations as defined under the RFP.
- 5. Except as specified in the Agreement, it is agreed that sharing of responsibilities as aforesaid and obligations thereto shall not in any way be a limitation of responsibility of the Lead Member under these presents.
- 6. The Members expressly agree to adhere to all the terms and conditions of the RFP and confirm that we don't have any Conflict of Interest (as defined in the RFP).
- 7. This Consortium Agreement shall be construed and interpreted in accordance with the Laws of India and Courts at [Place] shall have the exclusive jurisdiction in all matters relating thereto and arising there under.
- 8. It is hereby agreed that the Lead Consortium Member shall furnish the Bid Security, as stipulated in the RFP, on behalf of the Bidding Consortium.
- 9. It is hereby agreed that in case of selection of Bidding Consortium as the AMISP, the Parties to this Consortium Agreement do hereby agree that they shall furnish the Performance Security and other commitments to PFCCL as stipulated in the RFP and AMISP Contract. The Lead Member shall be responsible for ensuring the submission of the Performance Security and other commitments on behalf of all the Consortium Members.

- 10. It is further expressly agreed that the Consortium Agreement shall be irrevocable and, for the AMISP, shall remain valid over the term of the Project, unless expressly agreed to the contrary by PFCCL.
- 11. The Lead Consortium Member is authorized and shall be fully responsible for the accuracy and veracity of the representations and information submitted by the Consortium Members respectively from time to time in response to the RFP for the purposes of the Bid. The representation by the Lead Member shall be deemed to be on behalf of and binding on all members of the Consortium.
- 12. It is expressly understood and agreed between the Members of the Consortium and Parties that the responsibilities and obligations of each of the Members shall be as delineated as annexed hereto as **Annexure-A** forming integral part of this Agreement. It is further agreed by the Members that the above sharing of responsibilities and obligations shall not in any way be a limitation of responsibilities and liabilities of the Members, with regards to all matters relating to the execution of the Bid and implementation of the Project envisaged in the RFP Documents.
- 13. It is clearly agreed that the Lead Consortium Member shall ensure performance indicated in the RFP. In the event one or more Consortium Members fail to perform its/ their respective obligations, the same shall be deemed to be a default by all the Consortium Members.
- 14. It is hereby expressly agreed between the Parties to this Consortium Agreement that neither Party shall assign or delegate or subcontract its rights, duties or obligations under this Agreement to any person or entity except with prior written consent of PFCCL.

15. This Consortium Agreement:

- a) has been duly executed and delivered on behalf of each Party hereto and constitutes the legal, valid, binding and enforceable obligation of each such Party;
- b) sets forth the entire understanding of the Parties hereto with respect to the subject matter hereof; and
- c) may not be amended or modified except in writing signed by each of the Parties and with prior written consent of PFCCL.

Common Seal of	For M/s (Party
has been affixed in my/ our presence	1)
pursuant to Board Resolution dated	[Signature of Authorized Representative]

Annexure-A

Designation:

Role and Responsibility of each Member of the Consortium:

- 1. Roles and Responsibilities of the Party 1 (Lead Consortium Member):
- 2. Roles and Responsibilities of the Party 2

Section 4. Bidding Forms-Technical Proposal

3. Roles and Responsibilities of the Party 3

N. Roles and Responsibilities of the Party N

Form 9: Format of Power of Attorney by Consortium Member in favour of Lead
Consortium Member

[To be provided by each Consortium Member (other than the Lead Consortium Member) in favour of the Lead Consortium Member]

WHEREAS PFCCL has issued for RfP No. Smart_Metering/Puducherry/2021 dated 03.12.2021 (the "RFP") for inviting Bids in respect of Appointment of Advanced Metering Infrastructure ("AMI") Service Provider ("AMISP") for implementation of Smart Prepaid Metering in UT of Puducherry (the "Project") on the terms contained in the RFP;
WHEREAS M/s, M/s, M/s. and M/s
WHEREAS all the Members of the Consortium have agreed under the Consortium Agreement dated (the "Consortium Agreement"), entered into between all the Members and submitted along with the Bid to appoint [Insert the name and address of the Lead Consortium Member] as Lead Consortium Member to represent all the Members of the Consortium for all matters regarding the RFP and the Bid;
AND WHEREAS pursuant to the terms of the RFP and the Consortium Agreement, we, the Members of the Consortium hereby designate M/s [Insert name of the Lead Member] as the Lead Consortium Member to represent us in all matters regarding the Bid and the RFP, in the manner stated below:-
Know all men by these presents, we
authorize
including but not limited to undertakings, letters, certificates, acceptances, clarifications, guarantees or any other document, which PFCCL may require us to submit. The

aforesaid attorney is further authorized for making representations to PFCCL named in the RFP, and providing information / responses to PFCCL, representing us and the

Consortium in all matters before PFCCL named in the RFP, and generally dealing with PFCCL named in the RFP in all matters in connection with our Bid, till completion of the bidding process as well as implementation of the Project, if applicable, in accordance with the RFP.

We, as Members of the Consortium, hereby agree to ratify all acts, deeds and things done by our said attorney pursuant to this Power of Attorney and that all acts, deeds and things done by our aforesaid attorney shall be binding on us and shall always be deemed to have been done by us.

All the terms used herein but not defined shall have the meaning ascribed to such terms under the RFP.

We, as Members of the Consortium, hereby agree to ratify all acts, deeds and things done by our said attorney pursuant to this Power of Attorney and that all acts, deeds and things done by our aforesaid attorney shall be binding on us and shall always be deemed to have been done by us.

All the terms used herein but not defined shall have the meaning ascribed to such terms under the RFP.

Signed by the within named				
executant Consortium Member] through the hand				
duly authorized by the Boof Attorney dated thisday ofday of	ard to	issue suc	n Po	wer
Accepted				
(Signature of Attorney)				
[Insert Name, designation and address of the Attorney]				
Attested				
(Signature of the executant)				
(Name, designation and address of the executant)				
Cignoture and stamp of Natory of the place of evecution				
Signature and stamp of Notary of the place of execution				

Common seal of has been affixed in my/our presence pursuant to

Board of Director's Resolution dated......

Section 4. Bidding Forms-Technical Proposa	Section 4.	Bidding	Forms-Technical	Proposa
--	------------	---------	-----------------	---------

1.	WITNESS1	(Signature)
	Name	
	Designation	
2.	WITNESS2	(Signature)
	Name	, ,
Desig	nation	
Notes	3	

- a. The mode of execution of the power of attorney should be in accordance with the procedure, if any, laid down by the applicable law and the charter documents of the executant(s).
- b. In the event, power of attorney has been executed outside India, the same needs to be duly notarized by a notary public of the jurisdiction where it is executed.
- c. Also, wherever required, the executant(s) should submit for verification the extract of the charter documents and documents such as a Board resolution / power of attorney, in favour of the person executing this power of attorney for delegation of power hereunder on behalf of the executant(s).

Form 10: Format of Power of Attorney by Lead Consortium Member / Sole Bidder authorizing an Individual Designated Representative for the Consortium

[To be on non-judicial stamp paper of Rupees One Hundred Only (INR 100/-) or appropriate value as per Stamp Act relevant to place of execution. Foreign companies submitting Bids are required to follow the applicable law in their country.]

Know all men by these presents, we
and address of the registered office of the Lead Consortium Member of the Bidding
Consortium/ Sole Bidder] do hereby constitute, appoint, nominate and authorize Mr./Ms.
presently employed with us and holding the position of as our
true and lawful attorney, to do in our name and on our behalf, all such acts, deeds and
things necessary in connection with or incidental to submission of our Bid in response to
RfP No. Smart_Metering/Puducherry/2021 dated 03.12.2021 for Appointment of Advanced
Metering Infrastructure ("AMI") Service Provider ("AMISP") for implementation of Smart
Prepaid Metering in UT of Puducherry (the "Project") issued by PFC Consulting Ltd.
(PFCCL), including signing and submission of the Bid and all other documents related to
the Bid, including but not limited to undertakings, letters, certificates, acceptances,
clarifications, guarantees or any other document which PFCCL may require us to submit.
The aforesaid attorney is further authorized for making representations to PFCCL, and
providing information / responses to PFCCL, representing us in all matters before PFCCL,
and generally dealing with PFCCL in all matters in connection with our Bid till the
completion of the bidding process as per the terms of the RFP.
completion of the bluming process as per the terms of the fit is
We hereby agree to ratify all acts, deeds and things done by our said attorney pursuant to
this Power of Attorney and that all acts, deeds and things done by our aforesaid attorney
shall be binding on us and shall always be deemed to have been done by us.
shall be billaling off as and shall always be deciried to have been done by as.
All the terms used herein but not defined shall have the meaning ascribed to such terms
under the RFP.
under the Kiri.
Signed by the within named [Insert the name of the
executant company] through the hand of Mr./ Mrs.
duly authorized by the Board to issue such Power
of Attorney dated this day of
Accepted
Accepted
(Signature of Attorney)
[Insert Name, designation and address of the Attorney]
This cit i value, acciditation and addices of the 7 themself

Attested	
(Signature of the executant)	
(Name, designation and address of the executant)	
Signature and stamp of Notary of the place of execution	
Signature and stamp of Notary of the place of execution	
Common seal of has been affixed in my/our presence pursu Board of Director's Resolution dated	uant to
1. WITNESS 1(Signature)	
Name	
Designation	
Name	
Designation	

Notes:

- a. The mode of execution of the power of attorney should be in accordance with the procedure, if any, laid down by the applicable law and the charter documents of the executant(s).
- b. In the event, power of attorney has been executed outside India, the same needs to be duly notarized by a notary public of the jurisdiction where it is executed.
- c. Also, wherever required, the executant(s) should submit for verification the extract of the charter documents and documents such as a Board resolution / power of attorney, in favour of the person executing this power of attorney for delegation of power hereunder on behalf of the executant(s).

Form 11: Format of Letter of Consent by Consortium Member reviewing each element of the Bid

[On the letter head of Sole Bidder/ each Member of the Consortium including Lead Member]

[Reference No.]

From:

[Address of the Lead Consortium Member/ Sole Bidder] [Telephone No., Fax No., Email] [Date]

To:

Sh. Anupam Kashyap Chief Manager PFC Consulting Limited 7th Floor, A-Wing, Statesman House Connaught Place, New Delhi – 110 001

Sub: Bid for Appointment of Advanced Metering Infrastructure ("AMI") Service Provider ("AMISP") for implementation of Smart Prepaid Metering in UT of Puducherry

Ref: RfP No. Smart_Metering/Puducherry/2021 dated 03.12.2021

Dear Sir/ Madam,

Section 4. Bidding Forms-Technic	al Proposal	114
We hereby confirm that i	n accordance with Clause 7 of Section 2 of t	the RFP, we are
enclosing legally binding	g undertaking supported by a board resc	olution from the
	[insert name of Technically Evalu	ıated Entity and /
or Financially Evaluated E	Entity or its Ultimate Parent Company, as the c	ase may be] that
all the equity investmen	t obligations of[inse	ert name of the
Member] shall be d	eemed to be equity investment oblig	ations of the
	[insert name of Technically Evaluate	ed Entity and / or
Financially Evaluated Enti	ity or its Ultimate Parent Company, as the case	e may be] and in
=	[ins	
-	ıll be met by	-
name of Technically Evalu	uated Entity and / or Financially Evaluated Ent	ity or its Ultimate
Parent Company, as the c	ase may be]. [Insert if applicable]	
The details of contact pers	son are furnished as under:	
Name	:	
Designation	:	
Name of the Company	:	
Address	:	
Phone Nos.	:	
Fax Nos.	:	
E-mail address	:	
Dated the day of	of 20	
Thanking you,		
Yours faithfully,		

[Signature, Name, Designation of Authorized Signatory of Consortium Member and Company's Seal]

Business Address:

[Name and address of principal officer]

Form 12: Format of Summary of Audited Financial Statements

< This form needs to be submitted by Sole Bidder/ Lead Consortium Member. In case of an AIF or Foreign Investment Fund using ACI, ACI would be considered as per the certificate issued by statutory auditor (or such other certificate as filed with the regulator in the relevant jurisdiction) not older than 1 (one) month prior to the date of Bid Submission>

[Reference No.]

From:

[Address of the Lead Consortium Member/ Sole Bidder] [Telephone No., Fax No., Email] [Date]

To:

Sh. Anupam Kashyap Chief Manager PFC Consulting Limited 7th Floor, A-Wing, Statesman House Connaught Place, New Delhi – 110 001

Sub: Audited Financial Statement for [Insert name of Sole Bidder/Consortium Member].

Ref: RfP No. Smart_Metering/Puducherry/2021 dated 03.12.2021

Dear Sir/ Madam.

	NETWORTH FOR LAST THREE FINANCIALYEARS									
S. No.	Name of Financially Evaluated Entity(ies)	Relationship with Bidder	Financial Year (FY)	Net worth Amount (In Indian Rupees)						
1.										
2.										
3.										

	ACI FOR PRECEDING FINANCIALYEAR									
S. No.	Name of Financially Evaluated Entity(ies)	Relationship with Bidder	Financial Year (FY)	ACI Amount (In Indian Rupees)						
1.										
2.										
3.										

The above Networth/ ACI are arrived from our Audit Reports for the last three/ preceding² financial years duly submitted to the Income Tax Department along with our Audit Reports.

Hence, we certify from the records submitted to us. Thanking you,

Sincerely yours,

Yours Sincerely, [Insert Signature here] [Insert Name here] [Insert Designation here

Date: [Date]

Place: [Place]

 $^{^{2}}$ In case ACI is used to meet the financial requirements

Form 13: Record of Similar Work Done

S. No.	Name of Technicall y Evaluated Entity (ies)	Relationshi p with the Bidder	Contrac t Period	No. of Consumer, Nodes, etc.		Confirm attachment of PO/ WO	Confirm attachmen t of Installatio n Milestone/ execution certificate
1.							
2.							
3.							
4.							
5.							

Form 14: List of Material and Services

Table 1: List of Materials and Services for Smart Meters (region-wise details mentioned in Section 6, Clause 1.2, Table A) - Country of Origin to be mentioned by the bidder

S.No	Item Description	Unit	Quantity
1.	Single Phase Whole current Smart Meter 5-30A, 240V P-N (without communication module)	Nos.	3,46,992
2.	Three Phase Whole current Smart Meter 10-60A,3x240V P-N (without communication module)	Nos.	56,058
3.	HT Meters 3-phase (63.5V Ph-N, +/-5 A) (without communication module)	Nos.	312
4.	LT-CT Meters (3-phase 240V Ph-N, +/-5 A) (without communication module) (these meters are	Nos.	
	required only for Mahe & Yanam regions and for covering new LTCT services)		2,835
5.	Modular RF Mesh Module (for installation with each meter) (S.No. 1 +2)	Nos	4,03,050
6.	Modular GPRS Module (for installation with each HT and LT CT meter) (Sl. No. 3+4)	Nos.	3,147
7.	Standalone Modems for 110 KV Feeders	Nos.	36
8.	Standalone Modems for 22 KV Feeders	Nos.	38
9.	Standalone Modems for 11 KV Feeders	Nos.	32
10.	Standalone Modems for DTs	Nos.	343
11.	Standalone Modems for HT Consumers	Nos.	161
12.	Metering box for all types of Meters	Nos.	4,06,197
13.	CT for DT meters	Nos.	2,762
14.	Data Concentrator Units/Gateway/Router for forming RF Mesh Canopy (Data Concentrator Units/Gateway/Router should take care of any future consumer growth as per Utility)	Lumpsum	1
15.	IT Infrastructure over cloud & connectivity, system integration (Including application License fees) v system and any other hardware equipment/ software as defined in Technical Specifications of RfP	vith existing	PED billing
а	Head End System (HES) licenses	Lumpsum	1
b	Meter Data management System and Android &/ IOS Mobile App and web portal	Lumpsum	1
С	Centralized network management software along with patch management & identity management	Lumpsum	1
d	System Implementation	Lumpsum	1
e	Mobile app for consumer portal	Lumpsum	1
f	Mobile app for online recharge and through weblinks from Utility desired web portal	Lumpsum	1
g	Advisory Services on system operation till 1 year after operational acceptance	Lumpsum	1
h	Integration with existing Utility billing system	Lumpsum	1
<u>::</u> 	New IT Billing System and integration with AMI system	Lumpsum	1
 16.	Installation, Commissioning & Testing & Integration with existing system of Utility	Lumpsum	1
17.	Network Operation cum Monitoring Center	<u> </u>	
a.	Desktops/ Workstation (with UPS, Table, Chair, OS and latest MS Office)	Nos	10
	Network LaserJet (B/W) Photo copy, scanning and Printing	Nos	10
b.	A3 Size Inkjet Color Printer/All in one Color laser jet Printer	Nos	2
C.	A4 Size Inkjet / Bubble Jet printer	Nos	
d.	Work Station with Dual TFT Monitors	Nos	4 8
e. f.	Antivirus software/ UTM application	Lumpsum	1
18.	Infrastructure for Recharge through Feature Phones/ Offline Channels	Lampsam	
	Bill collection centres to be functioning as Retail distribution centres	Nos./ Job	41
a.	Workstation consoles, computer systems etc. (to be defined by AMISP) for Retail distribution	No.	41
b.	Training & Development	Lumpsum	41
19.			1
20.	communication link to Network Operation cum Monitoring Center	Nos.	1
21.	Consumer Engagement Activities		
a.	Consumer engagement plan	Lumpsum	1
b.	Communication and media plan	Lumpsum	1

S.No	Item Description	Unit	Quantity
C.	Implementation support for consumer engagement activities (i.e. Knowledge Materials/ Tools/ Brochures, Social media campaigns, Press release/ ads/ newsletters, Videos/ Film, Consumer Surveys etc.)	Lumpsum	1
22.	LESS: Buy Back of old meters including electromechanical, static, digital etc	Nos.	224188
23.	LESS: Buy Back of old LPRF meters	Nos.	180000

Any other items/ accessories (including mandatory spares) required for successful commissioning of the project and not specifically mentioned in the List of Materials and Services shall also deemed to be in the scope of the bidder.

Table 2: List of Materials and Services for FMS

S.No	Item Description	Unit	Quantity
1.	Field Maintenance services for meters (with boxes) of all category (i.e. S.No. 1 to 4 in Table 1) and modular RF mesh Module and Modular GPRS Module (for installation with meters as per Table 1	Nos.	1
2.	Field Maintenance services for complete canopy of the project area.	Lot	1
3.	AMC-System Integrated, application maintenance support and advisory services.	Lot	1
4.	Cloud services (Annual hosting fee) Including Bandwidth charges	Lot	1
5.	Software Licence AMC for HES, MDM, or if any	Lot	1
6.	Backhaul connectivity (SIM/MPLS/Optic fibre) for RF Mesh Canopy including providing communication link to Network Operation cum Monitoring Center	Nos	1

Table of Compliance

The Bidder shall submit 'Clause by Clause' compliance to the RFP document including the technical specifications and functional requirements (with amendments, if any) as per the format prescribed in Form 15

- . The Bidder shall annotate the Table of Contents of each section to provide a high-level summary of compliance status. In all cases, the following symbols, and no others shall be used:
 - C Bid complies with all requirements in the adjacent paragraph.
 - A Bid is not compliant with the requirements in the adjacent paragraph, but a functional alternative is proposed.
 - X Bid takes exception to the requirements of the adjacent paragraph and no functional alternative is proposed.

Only one symbol shall be assigned to paragraph and shall indicate the worst-case level of compliance for that paragraph. This annotation may be handwritten.

The Bidder shall also underline, on the compliance copy, all requirements to which exceptions have been taken (X) or to which alternatives have been proposed (A).

Each alternative shall be clearly and explicitly described. Such descriptions shall use the same paragraph numbering as the bid document sections addressed by the alternatives. All alternative descriptions shall be in one contiguous section of the bidder's proposal, preferably in the same volume, and titled "Alternatives." A separate section titled "Exceptions" shall also be provided containing any discussion or explanation chooses to provide concerning exceptions taken. Alternatives which do not substantially comply with the intent of the Bid documents will be considered exceptions.

Any clause which is not included in this compliance table shall be treated as "fully complied" or C.

PFCCL will assess the merits of each alternative and exception and will be the sole judge as to their acceptance.

Form 16: Format for Technical & Financial Requirement- Relationship & Details of Equity Shareholding

[Reference No.]

From:

[Address of the Lead Consortium Member/ Sole Bidder]

[Telephone No., Fax No., Email]

[Date]

To:

Sh. Anupam Kashyap Chief Manager PFC Consulting Limited 7th Floor, A-Wing, Statesman House Connaught Place, New Delhi – 110 001

Sub: Bid for Appointment of Advanced Metering Infrastructure ("AMI") Service Provider ("AMISP") for implementation of Smart Prepaid Metering in UT of Puducherry

Ref: RfP No. Smart Metering/Puducherry/2021 dated 03.12.2021

Dear Sir/ Madam,

Name of Company whose credentials considered	Type of credentials considered (technical and / or financial)	Relationship with Sole Bidder / Consortium Member (Parent / Affiliate)	Details of equity shareholding (refer notes below)
Company 1			

NOTES:

Varing faithfully

- i) In case of Parent, the equity holding of the Parent in the Sole Bidder / Member of the Bidding Consortium, including the Lead Member of the Consortium, need to be specified,
- ii) In case of Affiliate under direct control of Bidder, the equity holding of the Sole Bidder / Member of the Bidding Consortium, including the Lead Member of the Consortium in the Affiliate, needs to be specified.
- iii) In case of Affiliate under common control of Parent, the equity holding of the Parent in the Affiliate of the Sole Bidder / Member of the Bidding Consortium, including the Lead Member of the Consortium, needs to be specified.
- iv) Relationship Of Parent / Affiliate with Sole Bidder / Member Of Consortium to be at the most seven (7) days prior to the Bid Deadline (as per Clause 7 of Section 2 of the RFP)

Tours faithfully
(Signature and name of the authorized signatory of the Company and stamp)
Name:
Date:
Place:
(Signature and Stamp of statutory Auditors of Sole Bidder / each Member of Bidding Consortium)
Name:
Date:
Place:
Date:

Form 17: Authorization from Parent / Affiliate of Sole Bidder / Member of Bidding Consortium Whose Technical / Financial Capabilities has been used by the Sole Bidder / Member of Bidding Consortium

[On the Letter Head of the Parent /Affiliate]

[Reference No.]
From:
[Address of the Parent / Affiliate of Bidder / Member of Bidding Consortium]
[Telephone No., Fax No., Email]
[Date]

To:

Sh. Anupam Kashyap Chief Manager PFC Consulting Limited 7th Floor, A-Wing, Statesman House Connaught Place, New Delhi – 110 001

Dear Sir,

Sub: Bid for Appointment of Advanced Metering Infrastructure ("AMI") Service Provider ("AMISP") for implementation of Smart Prepaid Metering in UT of Puducherry

We refer to the RFP No. Smart_Metering/Puducherry/2021 dated 03.12.2021 ('RFP') issued by you for Appointment of Advanced Metering Infrastructure ("AMI") Service Provider ("AMISP") for implementation of Smart Prepaid Metering in UT of Puducherry.

Section 4. Bidding Forms-Technical Proposal
[Signature and Name of the authorized signatory of the Company and stamp]
Name:
Date:
Place:

Notes:

1. The above undertaking can be furnished by Ultimate Parent of Technically Evaluated Entity or Financially Evaluated Entity, as the case maybe, if legally binding undertaking is also furnished by the Ultimate Parent on behalf of such Financially Evaluated Entity/Technically Evaluated Entity.

Form 18: Format of Undertaking by Technically / Financially Evaluated Entity / Ultimate Parent Company

[On the Letter Head of the Technically / Financially Evaluated Entity / Ultimate Parent Company]

[Reference No.]

From:

[Address of the Technically / Financially Evaluated Entity / Ultimate Parent Company]

[Telephone No., Fax No., Email]

[Date]

To:

Sh. Anupam Kashyap Chief Manager PFC Consulting Limited 7th Floor, A-Wing, Statesman House Connaught Place, New Delhi – 110 001

Sub: Bid for Appointment of Advanced Metering Infrastructure ("AMI") Service Provider ("AMISP") for implementation of Smart Prepaid Metering in UT of Puducherry

Dear Sir.

We refer to the Request for Proposal No. *Smart_Metering/Puducherry/2021 dated 03.12.2021* ('RFP') issued by you for Appointment of Advanced Metering Infrastructure ("AMI") Service Provider ("AMISP") for implementation of Smart Prepaid Metering in UT of Puducherry.

We have attached hereto certified true copy of the Board resolution whereby the Board of Directors of our Company has approved issue of this Undertaking by the Company.

All the terms used herein but not defined, shall have the meaning as ascribed to the said terms under the RFP.

Certified as true.			
(Signature and Name of the au	uthorized signatory	of the Company	and stamp)

Note:

1. Wherever required, extract of the charter documents and documents such as a Board resolution should be submitted for verification.

Form 19: Formats for Board Resolutions

Format 1

Format of the Board resolution for the Sole Bidder / each Member of the Consortium / investing Affiliate / Parent Company / Ultimate Parent Company, where applicable

[Reference Clause 15 of Section 3 of the RFP and the illustrations in Annexure of this form] [Note: The following resolution no. 1 needs to be passed by the Boards of each of the entity(ies) making equity investment] the consent of all the Directors present and in compliance of the provisions of the Companies Act. 1956/2013, passed the following Resolution: 1. **RESOLVED THAT** pursuant to the provisions of the Companies Act, 1956 / Companies Act 2013 (as the case may be) and compliance thereof and as permitted under the Memorandum and Articles of Association of the company, approval of the Board be and is hereby accorded of SPV] representing the entire amount proposed to be invested by the company for the AMI [Note: Equity investment obligations by the Sole Bidder/each Member of the Bidding Consortium/investing Affiliate or Parent or Ultimate Parent should add up to 100%] [Note: In the event the Bidder is a Bidding Consortium, the following Board resolution no. 2 also needs to be passed by the Lead Member of the Bidding Consortium] 2. **RESOLVED THAT** approval of the Board be and is hereby accorded to contribute such further amount over and above the percentage (.....%) limit to the extent becoming necessary towards the total equity share in the [Name of SPV]. obligatory on the part of the company pursuant to the terms and conditions contained in the Consortium Agreement datedexecuted by the company as per the provisions of the RFP. Note: In the event, the investing entity is an Affiliate or Parent or Ultimate Parent of the Bidder, the following Board resolution no. 3 shall also be passed by the Bidder] 3. FURTHER RESOLVED THAT the Board hereby acknowledges the Board Resolution(s) of SPV], which is to be invested by the[Name of the Affiliate(s)/ Parent / [Note: The following resolution no. 4 is to be provided by the Sole Bidder / Lead Member of the Consortium only1 4. FURTHER RESOLVED THAT MR/MSbe and is hereby authorized to take all the steps required to be taken by the Company for submission of the Bid, including in particular, signing of the Bid, making changes thereto and submitting amended Bid, all the documents related to the Bid, certified copy of this Board resolution or letter or undertakings etc, required to be submitted to PFCCL as part of the Bid or such other documents as may be necessary in this regard.

Certified True Copy

Company rubber stamp to be afixed

[Notes:

- 1. This certified true copy should be submitted on the letterhead of the Company, signed by the Company Secretary or any Whole Time Director/ Manager (supported by a specific board resolution) of the Sole Bidder or the Lead Member of Consortium.
- 2. The contents of the format may be suitably re-worded indicating the identity of the entity passing the resolution, i.e., the Sole Bidder, each Member of the Bidding Consortium.
- 3. This format may be modified only to the limited extent required to comply with the local regulations and laws applicable to a foreign entity submitting this resolution. For example, reference to Companies Act 1956 / Companies Act 2013 (as the case may be) may be suitably modified to refer to the law applicable to the entity submitting the resolution. However, in such case, the foreign entity shall submit an unqualified opinion issued by the legal counsel of such foreign entity, stating that the Board resolutions are in compliance with the applicable laws of the respective jurisdictions of the issuing company and the authorizations granted therein are true and valid.]

Format 2

Format for the Board resolution of Technically / Financially Evaluated Entity / Ultimate Parent Company (in case credentials of such TEE/ FEE has been utilized by the Sole Bidder or Bidding Consortium)

Board resolution or letter, undertakings etc. required to be submitted to PFCCL as part of the Bid or such other documents as may be necessary in this regard.

Certified True Copy

Company rubber stamp to be affixed

Note:

- 1. This certified true copy should be submitted on the letterhead of the Company, signed by the Company Secretary or any Whole-time Director/Manager (supported by a specific board resolution) of Sole Bidder or Lead Member of the Consortium.
- 2. The contents of the format may be suitably re-worded indicating the identity Of the entity passing the resolution.
- 3. This format may be modified only to the limited extent required to comply with the local regulations and laws applicable to a foreign entity submitting this resolution. For example, reference to Companies Act 1956 / Companies Act 2013 (as the case may be) may be suitably modified to refer to the law applicable to the entity submitting the resolution. However, in such case, the foreign entity shall submit an unqualified opinion issued by the legal counsel of such foreign entity, stating that the Board resolutions are in compliance with the applicable laws of the respective jurisdictions of the issuing company and the authorizations granted therein are true and valid.

Annexure: Illustration for Applicable Board Resolution Requirements Under Clause 15 of Section 3

Investor in the AMISP			Requirement of Undertaking (Form 18)	
Bidder himself for 100% equity Meter	None	a) Format I of Annexure 11- Resolution:1,2 and 4 from the Bidder	None	
Bidder himself for 100% equity Meter	Affiliate and/or Parent Company and/or Ultimate Parent	a) Format I of Annexure 11 - Resolution: I, 2, and 4 from the Bidder b) Format 2 of Annexure II by either Technically/ Financially Evaluated Entity(ies) whose credentials have been used, or Ultimate Parent. Provided. If the Bidder himself is the Ultimate Parent, then Format 2 need not be provided.	Yes, by either Technically / Financially Evaluated Entity(ies) Affiliate(s) whose credentials have been used, or Ultimate Parent. Provided, if the Bidder himself is the Ultimate Parent, then the undertaking need not be provided.	
Bidder himself + others (Affiliate and/or Parent Company and/or Ultimate Parent) in aggregate holding 100% equity	None	a) Format 1 of Annexure 11 - Resolution: 1, 2, 3 And 4 from the Bidder. b) Format I of Annexure 11 - Resolution: I from the Affiliate and /or Parent and /or Ultimate Parent investing in the equity		
Bidder himself + Others (Affiliate and/or Parent Company and/or Ultimate Parent) in aggregate holding 100% equity	Affiliate and/or Parent Company and/or Ultimate Parent	a) Format 1 of Annexure 11 - Resolution: 1,2, 3 and 4 from the Bidder. b) Format I of Annexure 11 - Resolution: I from the Affiliate and/or Parent and/or Ultimate Parent investing in the equity c) Format 2 of Annexure 11 by either Parent / Affiliate(s) whose credentials have been used and /or Ultimate Parent investing in the equity	Yes, by either Parent/ Affiliate(s) whose credentials have been used, or Ultimate Parent	

Section 5. Financial Proposal - Forms

Sr.	Document	Attached? (Yes/ No)	For Official Use
1	Financial Bid as per format provided in Form 1		

Form 1: Format of Submission of Financial Bid (For Reference Only)

[IMPORTANT NOTE: THE FINANCIAL BID SHALL ONLY BE SUBMITTED IN THE ELECTRONIC FORMAT. IT SHALL NOT BE SUBMITTED IN HARD COPY OR AS A PART OF THE TECHNICAL BID..]

[On the letter head of each Member of the Consortium including Lead Member/ Sole Bidder]

[Reference No.]

From:

[Address of the Lead Consortium Member/ Sole Bidder] [Telephone No., Fax No., Email] [Date]

To:

Sh. Anupam Kashyap Chief Manager PFC Consulting Limited 7th Floor, A-Wing, Statesman House Connaught Place, New Delhi – 110 001

Sub: Financial Bid for Appointment of Advanced Metering Infrastructure ("AMI") Service Provider ("AMISP") for implementation of Smart Prepaid Metering in UT of Puducherry

Ref: RfP No. Smart_Metering/Puducherry/2021 dated 03.12.2021

Dear Sir/ Madam,

A. We have submitted our Financial Bid strictly in accordance with the RFP without any deviations or condition.

- B. Our Financial Bid is consistent with all the requirements of submission as stated in the RFP and subsequent communications.
- C. Price quoted clearly mentions the total cost (basic cost, Goods and Services Tax, or any other taxes/duties/levies).
- D. Under no circumstances shall escalation in prices of this Financial Bid be entertained by PFCCL whether due to factors within or beyond control of the Bidding Consortium such as change in tax structure, currency value change, etc.
- E. The details quoted herein shall stand valid at least for 9 months from the date of submission of this Financial Bid and for implementation of Project, if awarded, as per the timeframe indicated in the RFP.
- F. Our Total Cost of the Project for the contract period is INR.....; and the quoted cost will be a fixed for the entire contract duration
- G. All travel and boarding / lodging related expenses incurred by AMISP personnel for journeys to Delhi, anywhere in UT of Puducherry or anywhere in India in connection with the project under Scope of this RfP will be borne by the AMISP. PFCCL will not take any responsibility whatsoever on this account.
- H. Our quoted prices are as per the Annexure attached herein.

Dated the	[Insert date of the month] day of	[Insert month, year] at
[Inse	ert place].	

Thanking you,

Sincerely yours,

[Insert Signature here]
[Insert Name here]
[Insert Designation here]

Annexure: Quoted prices for the Financial Bid.

A. Table 1 - Quoted CAPEX

S. No	Item Description (A)	Total Quantity in Nos. (B)	CAPEX per Unit (in INR/ meter) (C)	GST & other applicable taxes, duties, levies, etc applicable in % (D)	CAPEX inclusive of GST (in INR/ meter) (E = C x (1+D%))	Total CAPEX for each category of meter (F = BxE)
1.	Meters (each with related hardware, software and equipment)*					
1.1	Single Phase Whole current Smart Meter 5-30A, 240V P-N	3,46,992				
1.2	Three Phase Whole current Smart Meter 10-60A,3x240V P-N	53,058				
1.3	HT Meters 3-phase (63.5V Ph-N, +/-5 A)	312				
1.4	LT-CT Meters (3-phase 240V Ph-N, +/-5 A)	2,835				
	Total					

^{*}The above cost is inclusive of supply, erection/ installation, setting up of the complete communication network & integration of items with existing system along with related hardware, software & equipment after successful completion of Field Installation and Integration Test (FIIT). The cost is also inclusive of all line items mentioned in Table 1 of the List of Materials and Services.

B. Table 2 - Quoted FMS Cost (Bidder to quote FMS cost by considering all items listed in Table 2 of the List of Materials and Services)

S. No	Item Description (A)	Total Quantity in Nos. (B)	FMS Cost per Unit per annum (in INR/ meter) (C)	GST & other applicable taxes, duties, levies, etc applicable in % (D)	FMS Cost inclusive of GST (in INR/ meter) (E = C x (1+D%))	Total FMS Cost for each category of meter for 7.5 years (F = BxEx7.5)
2.	Meters (each with related hardware, software and equipment)					
2.1	Single Phase Whole current Smart Meter 5-30A, 240V P-N	3,46,992				
2.2	Three Phase Whole current Smart Meter 10-60A,3x240V P-N	53,058				
2.3	HT Meters 3-phase (63.5V Ph-N, +/-5 A)	312				
2.4	LT-CT Meters (3-phase 240V Ph-N, +/-5 A)	2,835				
	Total					

^{*}The above cost is inclusive of all line items mentioned in Table 2 of the List of Materials and Services.

C. Table 3 - Manpower Cost with respect to new requirement for Software Component

S.No	Description (A)	Total Estimated Manmonth (B)	Manmonth Rate (in INR per month) (C)	GST & other applicable taxes, duties, levies, etc applicable in % (D)	Manmonth Cost inclusive of GST (in INR/ meter) (E = C x (1+D%))	Total Manpower Cost (F = ExB)
3.1	Architecture Specialists (Experience- 10+ years)	10				
3.2	Security Specialists (Experience- 10+ years)	10				
3.3	Integration Specialists (Experience- 10+ years)	10				
3.4	Data Base Developer- Sr. (Experience- 5+ years)	10				

Section 5. Financial Proposal-Forms

3.5	Web/ Mobile Application Developer- Sr. (Experience- 5+ years)	10		
3.6	Core Application Developer- Sr. (Experience- 5+ years)	10		
3.7	Data Base Developer- Jr. (Experience- Less than 5 years)	10		
3.8	Web/ Mobile Application Developer- Jr. (Experience- Less than 5 years)	10		
3.9	Core Application Developer- Jr. (Experience- Less than 5 years)	10		
	Total			

Estimated Manmonth mentioned in the above table is only for evaluation purpose. The actual payment to be made to AMISP would be based on the Manmonth Rate quoted by AMISP for the duration for which the respective manpower is deployed as per the new requirement for Software Component

Total Cost of the Project (Sub-total of Column F in Table 1, Table 2 and Table 3 above) = INR [X] crores

Section 6. Project Requirements

AMI System Requirements and Service Level Agreement

Table of Contents	
1.Overview of the AMISP Scope of Work	141
2. Supply, installation, integration, testing and commissioning of:	158
3.AMI System Integrations	228
4.Consumer Indexing	231
5.Consumer Engagement	232
6.Analytics and Reports	233
7.Operation and Maintenance	238
8.Training Requirements	251
9.Tests, Inspections and Management of the Quality Assurance / Quality Co	•
10.Project Management	
11.Document Requirements	277
12.Project Implementation Schedule	279
13.Annexures	281

1. Overview of the AMISP Scope of Work

1.1 Government of India has launched the "Revamped Distribution Sector Scheme – A Reforms-based and Result-linked Scheme" on 20.7.2021 to improve the reliability and quality of power supply, operational efficiencies and financial sustainability of the electricity distribution sector. One of the key areas of the scheme is implementation of Prepaid Smart Metering in public-private-partnership mode.

Electricity Department, Union Territory (UT) of Puducherry (Utility) has appointed PFC Consulting Ltd. (PFCCL) as Project Implementing Agency (PIA) for implementation of Smart Metering in Union Territory of Puducherry under the above scheme.

1.2 About the AMI Project and the AMI Project Area

PFCCL desires to appoint an "Advance Metering Infrastructure Service Provider (AMISP)" or the "AMISP" for implementation of the Advance Metering Infrastructure (AMI) Project in the pre-paid (by default)/ post-paid mode in selected area(s) of operation.

AMISP shall be responsible to implement the entire project within 10 months and shall also be responsible for operation & maintenance of all meters and related infrastructure for 90 months after operational acceptance of the entire AMI system. As this is a flagship project of Govt. Of India, the AMISP has to strictly comply with the project implementation schedule.

Although all regions / pockets of UT of Puducherry are geographically separate and with separate energy audit, they will be deemed to be contiguous for implementation of AMI Project (which will be ring fenced with boundary meters) where all consumers, DTs, feeders shall be smart metered to enable complete energy accounting with zero manual intervention. If required, division wise segregation may be effected by providing ring fencing meters.

PFCCL shall make payments to AMISP in accordance with the terms and conditions of this contract. Ownership of the entire system including all the hardware, software along with its valid licenses, and any data collected during the contract period would be of PFCCL and AMISP would assist PFCCL in transfer of the same to the Utility at the end of the Contract Period on 'as-is-where-is' basis to facilitate seamless operation of Utility businesses. If the licenses are perpetual, they would be simply transferred to the Utility at the end of the Contract Period. In the event perpetual licenses are not available and the AMISP has procured period licenses, the Utility will take over on payment of license fees at the end of the Contract Period.

Details of Existing System

The details of the existing operation of the Utility are as follows:

Table A - Region-Wise Profile (FY 2019-20)

Particulars	Puducherry	Karaikal	Mahe	Yanam	Total
Consumers Nos.	74%	18%	4%	4%	100%
Connected Load (kW)	75%	15%	5%	5%	100%
Energy Sales (MU)	79%	16%	2%	2%	100%
Area (sq. Km)	60%	32%	2%	6%	100%
T&D Losses (%)	13%	13%	10%	10%	12.52%

Table B - Commercial Data (FY 2019-20)

Consumer Category	Number of Consumers
Domestic	3,61,898
One Hut One Bulb (OHOB)	2,758
Commercial	56,008
Agriculture	7,301
Public Lighting & Lavish Lighting	1,548
LT Water Tank	807
Industrial	3,482
Cottage Industries /Poultry	31
Farms/ Horticulture/Pisciculture	
Comman	50
Total	4,33,883

Table C - AT&C Losses

1.			E)//10	5 1/4 5	5)/40	5)/// 0	5 \/00
SI.	Particulars	Units	FY16	FY17	FY18	FY19	FY20
1	Net Power Purchase (Ex- Bus)	MUs	2,591	2,771	2,842	2,849	2,900
2	Generation within area of supply of PED	MUs	213	231	215	214	240
	Power purchase from Common Pool/ UI Over-						
3	drawl/ Traders/ Exchange/ Others	MUs	-	37	29	62	46
4	UI Under-drawl	MUs	56	117	114	67	100
5	Open Access Power Purchase	MUs	-	-	40	-	-
	Total energy available for sale within the		2,747	2,923	3,012	3,058	3,086
6	licensed area to the consumers of the	MUs					
	DISCOM (1+2+3-4+5)						
7	Power drawn by TANGEDCO at UT periphery	MUs	24	17	17	9	10
8	Sale to open access consumers	MUs	-	37	39	-	-
9	Net Energy available at periphery (6-7-8)	MUs	2,723	2,869	2,955	3,049	3,077
10	Energy Sales within UT	MUs	2,398	2,466	2,549	2,645	2,684
11	Distribution Loss (1- 10/9)	%	11.93%	14.04%	13.75%	13.27%	12.75%
12	Revenue Billed	Rs Cr	1,130	1,192	1,272	1,440	1,503
13	Revenue Collected	Rs Cr	986	1,113	1,173	1,343	1,408
14	Collection Efficiency (13/12)	%	87.26%	93.34%	92.23%	93.27%	93.71%
15	AT&C Loss (1-(1- 11)*14)	%	23.14%	19.76%	20.46%	19.10%	18.24%

Table D - Consumer Metering Status (FY 2019-20)

Concumer Cotegory	Mechanical Meters			Electronic Meters			Un-
Consumer Category	Working	Defective	Total	Working	Defective	Total	metered

Domestic	18,369	954	19,323	3,11,824	17,119	3,28,943	-
One Hut One Bulb (OHOB)	-	1,921	1,921	286	6	292	6,595
Commercial	1,594	225	1,819	61,548	916	62,464	-
Agriculture	-	400	400	1,683	-	1,683	5,306
Public Lighting	-	12	12	2,386	38	2,424	-
LT Industrial & Water Tank		155	155	6,752	16	6,768	-
Hoardings/ Signboards	-	-	-	-	-	-	-
Temporary Supply	-	-	-	-	-	-	-
HT I a: Industrial	-	-	-	328	-	228	-
HT I b: Commercial	-	-	-	101	-	101	-
HT II Others	-	-	-	67	-	67	-
HT III EHT	1	ı	•	7	•	7	-
Temporary Supply	1	-	-	-	-		-
Total	19,963	3,667	23,630	3,84,982	18,095	4,03,077	11,901

Table E - Status of Feeder & DTR Metering

Region	Particulars	Metered with modem	Metered without modem	Unmetered	Defectiv e	Total
	22 kV Feeders	35	38	-	-	73
Puducherry	11 kV Feeders	-	16	-	-	16
	DTRs	-	1,836	660	577	2,496
Voroikal	11 kV Feeders	21	4	-	-	25
Karaikal	DTRs	-	237	193	5	430
Mahe	11 kV Feeders	-	5	-	-	5
iviarie	DTRs	-	71	4	60	75
	33 KV Feeder	-	2			
Yanam	11 kV Feeders	-	8	-	-	8
	DTRs	-	75	34	14	109
	22 kV	35	38	-	-	73
Total	Feeders					
	11 kV	21	33	-	-	54
	Feeders					
	DTRs	-	2,219	891	656	3,110

The Utility has undertaken a Smart Grid Pilot Project under National Smart Grid Mission (NSGM), Gol wherein 31,444 no. of Smart Meters have been implemented in UT of Puducherry. The details of the same are as follows:

Table F - Category wise Smart Meters installed in Puducherry & Karaikal regions

O&M	Commerci al	Domestic	Industrial	Water Tank	Public lighting	DT	Total
		F	Puducherry I	Region			
Town Central	4118	2383	14	4	-	8	6527
Town North	1058	5824	18	1	-	15	6916
Town South	753	5178	9	1	-	4	5945
Town South Central	1311	9289	15		5	25	10645
Other O&M	334	25	808	25	-		1192
Sub-Total	7574	22699	864	31	5	52	31225

Kariakal Region								
Karaikal	135	7	71	2	4	-	219	
Grand Total	7709	22706	935	33	9	52	31444	

Table G - Number, Type and rating of Smart Meters of meters installed

S. No	Type and rating of meters	Puducherry Region	Karaikal Region	Total
1.	Single phase,240V,Type-DDZY178,5 -60A,	21505		21505
2.	Three phase 240V, Type-DTZY178, 10-60A	8250		8250
3.	CT meters Three phase 240V, Type-DTZ178-G,1-60A	1418	219	1637
4.	DT meter (LT CT meters) Three phase 240V, Type-DTZ178-G, 1-60A	52		52
	TOTAL	31225	219	31444

The single phase and three phase whole current Smart Meters comply to IS 16444 and are based on RF communication technology. The communication protocol for GPRS based CT meters is as per IS 15959/ DLMS-COSEM.

Further, at present manual, Low Power Radio Frequency (LPRF) and remote reading of meters are in operation in the Utility.

a. Manual Reading of meters

In this method, the bills are generated cycle wise and issued to the bill collectors who have outstanding amount and past reading of the consumer. The Bill collectors visit consumer premises and manually read present reading of the consumer and issue the bills on the spot. They also arrange for updating the manually recorded reading in the proprietary billing software. The billing data of all consumers are updated in the server on daily basis after which the consumers can make payment in any of the online modes of payment.

b. Reading of LPRF meters

The bill collectors collect the data from the LPRF meter by using Hand held Unit for arriving at the billed amount and issuance of the bills on the spot. The data is also fed to the proprietary billing system using the interface given for LPRF meters and the data is updated in cloud.

c. Reading of Smart Meters

In this method, the readings of meters are updated remotely through the Meter Data Acquisition System (MDAS) of the AMI system implemented under the Smart Grid Pilot Project wherein cycle wise consumption data of the consumers are shared with the billing system. The billing system imports the data to the proprietary software and bill amounts are generated. The bill collectors distribute the bills and the data is updated in the cloud server through which the consumers can make payment in any of the online modes of payment.

Requirements for Proposed AMI Project

The requirements for the proposed AMI project are as follows:

Table H - Requirement of Smart Meters and CTs

S.No	Description	Total Nos. of Meter	Meters Already Covered under Smart Grid Pilot Project and other proposals	Total Smart Meters Required	Total Standalone Modems required
1	Single Phase Whole Current Meter (240V P- N, 5-30A)	3,70,484	21,505	3,48,979	-
2	Three Phase Whole Current Meter (240V P-N, 10-60A)	63,399	9,966	53,433	-
3	LT CT Meters (3-phase 240V Ph-N, +/-5 A)	3,189	1,563	1,626	1,669
4	HT CT Meters (3-phase 63.5V Ph-N, +/-5 A)	472	322	150	322
	Total	4,37,544	33,356	4,04,188	2,647

The above quantity may vary upto the limit of - 20% up to +30% as may be agreed with Utility during project implementation. However, AMISP has to ensure 100% coverage of all consumers through smart meters which is the target of the project and for which Utility/ PFCCL shall extend all possible support

The above includes requirement of Smart Meters at DT and HT levels are as per the following:

Table I - Requirement of Smart Meters at DT Level

Region	Smart Meters Required at DTs
Puducherry	1237
Karaikal	198
Mahe	64
Yanam	48
Total	1547

Table J - Requirement of Smart Meters at HT Level

S.No.	Category	Nos. of
		Consumers
1	HT-I (Private)	392
2	HT-I (GU)	6
3	HT-II (G)	67
4	HT-III	7
	TOTAL	472

Further, following are the additional requirements of the Utility:

- a. Metering box is required for all meters. The specifications of meter box are given in Annexure O.
- b. LTCT Smart Meters are required only for Mahe & Yanam regions and for covering new LTCT services
- c. CTs are required for only DT meters
- d. Initially, AMISP shall prioritize and target the EHT, HT and high end consumers followed by low end consumers

- e. Old meters to be bought back by AMISP. The same includes around 123,087 single phase LPRF meters and 30,022 Three phase LPRF meters which have been installed under R-APDRP, DDUGGY and IPDS projects and can be utilized in other utilities.
- f. Presently, IT billing is functioning through the software developed by NIC using .net framework and is hosted in NIC cloud. The meter reading details are uploaded from TAB and bill processed in the cloud and bill details available to the consumer. The software code will be made available to AMISP and access to demo server will be provided and the AMISP should arrange for integration of AMI system with the above cloud billing system. AMISP shall also provide support for maintenance of the existing billing system. A new IT billing system replacing the existing proprietary system which would preferably accommodate the NIC cloud payment system and utilize the existing IT software and infrastructure wherever possible (in discussion the Utility) and shall address the gaps required to implement the project. Further, the new billing system would support integration of the existing Smart Grid Pilot AMI system, SCADA/DMS system provided under R-APDRP project and Rural feeder monitoring system so as to utilize the resources effectively. The new IT Billing System shall be fully integrated with the entire AMI system. The Billing System Provider shall share the source code to PFCCL/ Utility.
- 1.3 The AMI system should be designed such that all the required hardware, software, and firmware with upgrades satisfy the AMI system requirements and service level agreements as specified in this Contract while considering technical obsolescence over the operating life of the system and suitability for future scale up. AMISP is free to decide upon the best solution out of all the available options. However, the entire responsibility of fully functional AMI system shall rest with the AMISP in order to meet the performance levels as given in the Contract. The AMISP shall ensure that the Solution complies with the Applicable Law, technical specifications and other provisions of the Contract.

1.4 Brief Scope of Work:

The scope of work of the AMISP shall cover end-to-end metering (from Feeders, Distribution Transformers (DTs) and all end consumers) (i.e. design, procure, supply, install, test, commission, integration and operation & maintenance) in the selected AMI Project area to enable complete energy accounting with zero manual intervention.

AMISP shall prepare a Detailed Project Report (DPR) as per the requirements of Ministry of Power (MoP), Govt. of India and assistance in obtaining approval from appropriate authority.

AMISP shall prepare and submit Project Implementation Plan in consultation with PFCCL/ Utility

Project Implementation

The scope of work for AMISP during implementation period shall include, in complete conformity with the specifications as mentioned in this Contract and Applicable Laws, site survey, planning, designing, financing, engineering, manufacturing, supply, transportation & insurance, delivery at site, unloading, handling, storage, installation, integration, testing, commissioning, demonstration for acceptance, training, maintenance, operation and documentation of:

- a) Single phase whole current Smart Meter (with net-metering) with meter box as per List of Material and Services (Form 14) & suitable communication technology with pre-paid mode as default mode unless specified otherwise and can be configured from the backend from post-paid to pre-paid and vice versa;
- b) Three phase whole current Smart Meter (with net-metering) with meter box as per List of Material and Services (Form 14) & suitable communication technology of RfP with pre-paid mode as default mode unless specified otherwise and can be configured from the backend from post-paid to pre-paid and vice versa;
- c) CT operated three phase Smart Meter (with net-metering) with meter box, CTs as per List of Material and Services (Form 14) & suitable communication technology;
- d) CTs for only DT meters
- e) HT and other consumers having high energy consumption would be covered for smart metering in the initial phase when the implementation starts
- f) Supply of standalone modems as per List of Material and Services (Form 14) of RfP.
- g) AMI communication systems which include the following:
 - i. Hybrid communication technology (RF/ GPRS) Primarily based on RF and wherever RF is not feasible GPRS based communication shall be established
 - ii. Head End System (HES) to acquire data from various end points remotely (i.e. avoiding any human intervention) and monitor parameters acquired from meters
- h) Meter Data Management System (MDMS) which shall support storage, archiving, retrieval & analysis of meter data and various other MIS along with validation & verification algorithms. It shall act as a central data repository with interactive dashboard. MDMS shall have capability to import raw or validated data in defined formats and export the processed and validated data to various other systems sources and services in the agreed format. It shall provide validated data for upstream systems such as billing, analytics, reporting, etc. MDMS would also support integration of future ERP systems as well as future smart grid functionalities like consumer information system, customer care, network planning & analysis, load analysis/forecasting, Peak Load Management, Outage Management System, Distribution Transformer Monitoring system, self-healing

system etc.

- i) Cloud Service to host the HES, MDM and Web Applications.
- j) Integration of HES with MDM & MDM with existing/ legacy applications/ systems as well as planned future technology deployments/ integration requirement of the Utility like consumer information system, customer care, network planning & analysis, load analysis/forecasting, Peak Load Management, Outage Management System, Distribution Transformer Monitoring system, self-healing system etc. AMISP shall assist PFCCL/ Utility in identification of use cases for integration of AMI with other systems
- k) Integration of existing Smart Meters installed by the Utility with the new AMI system. The Utility shall facilitate the same through the vendor of existing Smart Meter system
- Integration with billing systems, and existing legacy systems. Details of legacy systems are provided in this document; AMI System integration as per Clause 3 of Schedule A;
- m)Consumer portal and Mobile App through which consumer shall be able to log in through android/ iOS/ Window based mobile app to see information related to their energy consumption
- n) Integration of different devices/ equipment/ software covered in the scope of this Project with each other as per functional requirements which includes integration of DLMS compatible Feeder, DT, HT and EHT consumer meters already existing
- o) Network Operation cum Monitoring Centre (NOMC) with suitable backend communication infrastructure, hardware and power supply as per Clause 2.6 of this section:
- p) Development of standard interfaces to enable integration of future IT/ OT applications with the AMI system.
- q) All other necessary software along with valid licenses relevant to the Project (as per Clause 2.7 of this section);
- r) Integration with existing payment infrastructure (the same shall be facilitated by the Utility) including different payment channels for pre-paid recharges and postpaid bill payments. The channels to include mobile-based recharge/ payment options. The AMISP shall also create/ facilitate availability of infrastructure for recharge through feature phones/ channels
- s) A new IT billing system replacing the existing proprietary system which would preferably accommodate the NIC cloud payment system and utilize the existing IT software and infrastructure wherever possible (in discussion the Utility) and shall address the gaps required to implement the project. Further, the new billing system would support integration of the existing Smart Grid Pilot AMI system, SCADA/DMS system provided under R-APDRP project and Rural feeder monitoring system so as to utilize the resources effectively. Annexure N may be

referred for the specifications of the new IT billing system. Presently, IT billing is functioning through the software developed by NIC using .net framework and is hosted in NIC cloud. The meter reading details are uploaded from TAB and bill processed in the cloud and bill details available to the consumer. The software code will be made available to AMISP and access to demo server will be provided and the AMISP should arrange for integration of AMI system with the above cloud billing system. AMISP shall also provide support for maintenance of the existing billing system. The new IT Billing System shall be fully integrated with the entire AMI system. The Billing System Provider shall share the source code to PFCCL/ Utility.

- t) AMISP shall establish the Back-End IT system with scalability features to handle all consumers of the Utility for next 15 years
- u) Site survey of consumers and DTs using GIS tools to get the GIS coordinates of the consumers and all meter locations. The survey shall include the pole & DT wise mapping of consumers so as to have DT wise, Feeder wise, substation wise, section wise etc. energy audits. Utility has conducted the GIS mapping of around 1.9 lakh consumers and associated network elements in the urban area under R-APDRP scheme and the AMISP shall require mapping for the balance consumers and update the existing data for any changes
- v) Consumer indexing on de-novo basis for contiguous electrical locations in the selected AMI Project Area along with its regular updates during contract period as per Clause 4 of Schedule A of this Contract
- w) Carrying out performance tests like Factory Acceptance Test (FAT), Site Acceptance Test (SAT) etc. and inspection of installed infrastructure jointly with PFCCL/ Utility team. During the term of contract, PFCCL/ Utility or its authorized representatives shall have the right to inspect the AMI Infrastructure installed under the project from time to time, with prior written notice to AMISP. Defects or deficiencies, if any, would be rectified. Further, such inspections shall not relieve or absolve AMISP of its obligations and liabilities hereunder in any manner whatsoever
- x) Ensuring Operational Acceptance of the project. Operation Acceptance of the entire project shall be given on 90% commissioning of the total smart meters quantity and 100% completion of all other activities
- y) Development of a comprehensive consumer engagement plan (as per Clause 5 of this Section) related to different stages of implementation (Pre, during and post installation phases of smart metering) in consultation with utility and implement its part of its activities as per the developed plan. The plan at the minimum should include consumer engagement activities to be undertaken at Utility's headquarter, division and sub-division level as well as communication and media plan;

- z) Ensure implementation of the governance mechanism and submit Monthly Progress Reports on AMI Project implementation
- aa) Generation of automated energy audit reports (DT level/ Feeder level / Subdivision level/ Division level/ Circle) and other reports as per Clause 6 of this Section;
- bb) Guidelines for testing, inspection, approval of test records and in general, management of the Quality Assurance / Quality Control program of the AMI project as per Clause 9 of this Section shall be generally adhered to;
- cc) Utility would ensure adequate meter testing facility get the meters tested at site as per its prevalent practice
- dd) Guidelines for project management given in Clause 10 of this Section shall be generally adhered to.
- ee) Training of Utility personnel, as required for efficient, viable and fully functional system as per Clause 8 of this Section;
- ff) The AMISP shall be required to submit project documentation describing the system operations for information/ approval as per Clause 11 of this Section to PFCCL and Utility.
- gg) Providing Installation Record/ Certificate to PFCCL/ Utility indicating date of installation, serial number, capacity and make of the AMI Infrastructure, the installation date and service dates etc.
- hh) Submission of checklist of documents wherein PFCCL/ Utility's approvals are required
- ii) Any other services as may be required by PFCCL/ Utility & mutually agreed upon
- jj) AMISP shall open and maintain office(s) in a reasonable location in respective regions (i.e. Puducherry, Karaikal, Yanam and Mahe) where project work is in progress upon commencement of project work. The office space(s) shall be furnished with basic office furniture, Air Conditioner, Lighting and electrical arrangements for charging laptop or Computer including basic amenities;
- kk) The AMI Project shall be transferred to the Utility at no cost at the end of the term of the Contract on as-is where-is basis.

Facility Management Services (FMS) / Operation & Maintenance (O&M) Services

- a) Operation, maintenance, and support services after the successful completion of the Operational Go-Live of the system as per Clause 7 of this Section
- b) All associated works/ items as required for efficient, viable and fully functional system is the responsibility of AMISP. The AMISP shall also be responsible to operate the system for the Operational Period during which AMISP shall maintain system availability and service levels as mentioned in this document. The AMISP shall also bear the cost of recurring charges including necessary upgrades for the complete AMI system as may be required and decided by the AMISP during the

Contract Period. The services during Operational Period would include the following:

- i. Management of Cloud platform, IT Licences renewal, IT Software maintenance
- ii. Maintaining system availability/ uptime as per agreed SLA
- iii. Maintenance of entire AMI field & Back-End Infrastructure
- iv. Maintenance of AMI Communication Network
- v. Installation of Smart Meters for new connections & replacement of faulty meter on request of Utility
- vi. Network Operation cum Monitoring Centre operation
- vii. Connectivity & communication of AMI project
- viii. Identification and reporting of exceptional cases based on MDM data analytics as per the agreed measurement & verification methodology.
- ix. Providing recommendations and improvement measures
- x. Review, analysis & validation of AMI Project results linked to KPIs
- xi. Energy Audit report (right upto DT), Data Analytics for eliminating pilferage of Power & assistance in 'recovery measures' in collaboration with PFCCL/ Utility
- xii. Managing projects issues & concerns and providing recommendations for corrective actions
- xiii. Identification and reporting of exceptional cases based on MDM data analytics as per agreed measurement & verification methodology
- xiv. Implementation of Consumer Engagement Plan and ensuring effective redressal to the consumer grievances and complaints.
- xv. Assistance in transfer of the ownership, rights and title of the installed AMI Infrastructure to the Utility post completion of the Operational Period.
- xvi. Action for rectification of faults in AMI system as per system inputs
- xvii. Any other services as may be required by PFCCL/ Utility & mutually agreed upon

Repair & Maintenance of installed AMI Infrastructure

- a) Action for rectification of faults in AMI system as per system inputs
- b) In case of any faulty/ malfunctioning in AMI Infrastructure, Utility to provide details of the fault/ malfunction or the reason of failure and submit a copy of the Installation Record/ Certificate
- c) Verification of the fault/ reason for failure of the AMI Infrastructure by a Third Party Agency or Joint Team of AMISP and PFCCL/ Utility executives, as per requirement, and intimation of the findings to AMISP and PFCCL/ Utility;
- d) Ensuring that faulty or defective AMI Infrastructure is repaired or replaced as soon as reasonably feasible and free of cost to PFCCL/ Utility. A record of repairs/ replacements of the AMI Infrastructure to be kept and shared with PFCCL/ Utility on quarterly basis;
- e) However, notwithstanding to the contrary contained in this proposal, in case of

any theft or sabotage of the AMI Infrastructure or if the reason(s) for failure/malfunctioning or defect of the AMI Infrastructure is attributable to normal wear and tear, or mishandling or inappropriate usage of the AMI Infrastructure by Utility, or reasons attributable to the negligence of Utility, or any other reasons beyond the control of AMISP, Utility shall be liable to replace/repair such AMI Infrastructure at its own cost, and Utility would further ensure that the replaced or repaired AMI Infrastructure or repaired AMI Infrastructure conforms to the standard and specifications as specified under the project.

Assisting PED in adoption of AMI

- a) As implementation of AMI will need Utility to adopt to the changes which is expected to be implemented on selected consumer base in a phased manner, AMISP shall provide inputs to Utility in the following areas to ensure smoother adoption and usage of technology:
 - i. **Regulatory Approvals:** AMISP will provide inputs to Utility in obtaining required regulatory approvals for the AMI Project
 - ii. Business Process Re-engineering: AMISP's team of experts shall do an in depth study of the commercial processes of Utility to form an understanding of the "As-Is" processes being carried out. Based on this understanding a gap analysis shall be done with respect to requirements post deployment of the new AMI systems and necessary recommendations for making suitable changes in the processes shall be made to Utility.
 - iii. Customer Engagement: Smart meter roll out success depends to a large extent depends upon its acceptance by the end customers. AMISP's team of experts will assist Utility officials in managing customer engagement and reach out program which shall enable smooth roll out of the smart metering project.
 - iV. Employee Competency Building: During O&M phase AMISP's team of experts shall design training programs and conduct training programs which shall enable Utility officials to operate and maintain the AMI system on their own.

- 1.5 Unless otherwise stipulated in the RfP or the Contract, the scope of work shall include all such items not specifically mentioned in the Contract but that can be reasonably inferred from the Contract as being required for comprehensive, successful and satisfactory implementation of the Solution as if such items were expressly mentioned in the Contract. The same may be mutually enlisted and agreed upon by PFCCL/ Utility and AMISP during the design phase as defined in the Contract:
- 1.6 Wherever references are made in the RfP to codes and standards in accordance with which the Solution shall be executed, the edition or the revised version of such codes and standards shall be those specified in the scope of work;
- 1.7 The systems which are at a risk of technical obsolescence over the operating life of the system should be identified; this should include end-of-sale and end-of-support policies governing the proposed technologies. Forward and backward compatibility need to be considered and mitigation option shall be indicated in detail and shall not be limited to periodic update from OEM/System supplier
- 1.8 Submission of all deliverables to PFCCL and incorporation of suggestions/comments of PFCCL/Utility, if any.
- 1.9 **Exclusion from Scope of Work:** Following shall be excluded from AMISP's scope of work
 - a. Construction of building for AMI Network Operation cum Monitoring Centre;
 - b. Lighting system for AMI Network Operation cum Monitoring Centre:
 - Interior and Integrated Building Management System (IBMS) of building for AMI Network Operation cum Monitoring Centre;
 - d. Air conditioning and ventilation for AMI Network Operation cum Monitoring Centre:
 - e. Firefighting system for AMI Network Operation cum Monitoring Centre;
 - f. A.C. input power and back-up supply for AMI Network Operation cum Monitoring Centre;
 - g. Service cable including electrical neutral connectivity to the transformer, wherever applicable;
 - h. Any modifications required in the existing system of the Utility (Website, etc.).
 - i. Consumer indexing for dispersed metering at non-contiguous electrical locations in the selected AMI Project Area

1.10 Responsibilities of Utility/ PFCCL

A person designated by CEO, PFCCL shall act as the nodal point for the implementation of the Contract and for issuing necessary instructions, approvals,

commissioning, acceptance certificates, payments etc. to the AMISP. The PFCCL/ Utility shall:

- a) Whenever implementation of any component of the Solution requires that the AMISP obtain permits, approvals, and import and other licenses from local public authorities, PFCCL/ Utility shall, if so required by the AMISP, make its best effort to assist the AMISP in complying with such requirements in a timely and expeditious manner;
- b) Erection of requisite structure for installation of boundary meters and corresponding ring fencing of Project Area
- c) Approve all such documents required for completion of Pre-Operational Go-Live Phase, in accordance with Clause 11 of this Section, within 15 (fifteen) working days from the date of submission of such documents;
- d) PFCCL/ Utility to provide on AMISP's request, particulars/ information / or documentation that may be required by the AMISP within 30 (thirty) days from date of execution of the Contract to enable preparation of the Project Implementation plan by the AMISP;
- e) Participation in and approval of "Type" tests as well as factory and site acceptance tests
- f) Routine tests shall be conducted at AMISP's works only and Material Dispatch Clearance Certificate (MDCC) shall be issued on completion of testing/inspection by Utility or it representative. AMISP will raise the inspection call 7 days in advance for deputation of inspector. In case of non-deputation, inspection waiver & MDCC will be provided immediately.
- g) Provide existing database of consumer indexing and physical & IT infrastructure as available with the Utility. Utility shall assist in collection of all required data by the AMISP to identify all the consumers connected on the identified substations, feeder lines and transformers of the AMISP Project area;
- h) PFCCL/ Utility to Review and approval of AMISP's Project Implementation Plan;
- Utility to provide drawings for NOMC building where AMI system installations are planned;
- j) PFCCL/ Utility to provide necessary inputs for developing a comprehensive consumer engagement plan;
- k) Utility to provide necessary approvals for shutdowns as required for implementing the AMI System;
- I) Utility to coordinate with AMISP for buyback of replaced old meters by AMISP
- m) Utility/ PFCCL implement consumer engagement plan with support of AMISP. This would include running media campaign to raise awareness and countering myths around smart metering prior to installation, providing SOPs for smart meter installation to AMISP, etc.;

- n) Keep AMISP informed of any changes in the area network during the project installation and operation period. Furthermore, Utility/ PFCCL will partner with AMISP for discovering/ updating consumer indexing (DT/ Feeder wise) after installation of smart meters through structured power events data analysis including scheduling such events for each node with minimum inconvenience to consumer;
- o) Utility to provide A.C. power supply inputs;
- p) Utility/ PFCCL to provide all required documents for delivery of material at site;
- q) Utility to provide at its expense, the electrical energy required for performance of the Project activities, installation, testing, and operation of the AMI Systems;
- r) Utility to provide support and access to facilities at the sites, including consumer premises;
- s) Utility to arrange for necessary shutdowns and work permits;
- t) Utility to implement major civil works such as expansions or construction of rooms, trenches etc. as required for the AMI equipment;
- u) Utility to ensure that sites for installation for Smart Meters are ready along with service cable including electrical neutral connectivity to the transformer, wherever applicable for AMISP;
- v) Utility to provide the required integration interface details of the existing billing enterprise and related information required for Operational Go-Live of the AMI system, within 6 (six) months from date of execution of the Contract;
- w) Utility to provide necessary clearance/ approval/ permits that are to be issued by it for initial 20% of contiguous electrical locations for Smart Meter deployment along with related documentation within 6 (six) months from date of execution of this Contract. Provide necessary clearance/ approval/ permits to be issued by it for remaining contiguous electrical locations as well as non-contiguous electrical locations for Smart Meter deployment along with related documentation on quarterly basis. Utility shall endeavour to provide 20% of contiguous electrical locations cleared each quarter and complete area within 18 (eighteen) months from date of execution of the Contract. Utility shall issue a Notice (provided if the Utility has not been able to provide clearance/ approval/ permits for installation of the meters) no later than 7 days of expiry of time period specified above confirming the actual number of meters for which clearance/ approval/ permits is available
- x) PFCCL/ Utility to review the specifications of the Goods proposed to be used to ensure compliance with the provisions of this Contract.
- y) PFCCL/ Utility to provide reasonable support to the AMISP for the Operational Go-Live in terms of the provisions of this Contract;

- z) Utility shall provide necessary support to AMISP in the Project area, in relation to (amongst others) access to Utility's/consumers premises, installation of AMI system, repair and maintenance services, etc. Utility shall also:
 - Give access to AMISP supervisor or its operation & maintenance staff to work in the Project area during the Contract Period;
 - ii. Allow AMISP unfettered access to a covered and adequate enclosed space to set up a storage unit for meters & associated components in a reasonable location at no extra cost for storing the supplied equipment in respective regions (i.e. Puducherry, Karaikal, Yanam and Mahe) where project work is in progress and to set up it's a call center and control room. Such covered and enclosed space as required by AMISP would be provided by Utility free of cost for the Term of contract.
 - iii. Give access to AMISP to use existing power and water supply, and other necessary equipment, as mutually agreed with the AMISP;
 - iv. Not move, remove, modify, alter, or change the AMI system or any part thereof in the boundary of the AMI system installed by the AMISP without the prior written consent of AMISP. Utility shall take all reasonable steps to protect the AMI system from damage or injury and shall follow procedure for emergency action provided in advance by AMISP;
- aa)PFCCL/ Utility to participate in periodic review meetings as per the project governance structure, and shall support with the required interventions requested:
- bb)Utility to be responsible for operation and maintenance of power supply system, and promptly attend to any break down including repair or replacement of any equipment used/needed for maintaining continuity of electricity supply for AMI system operation;
- cc) Permit AMISP to perform the project activities during working hours, and also after working hours as necessary, to meet the requirements of Project Implementation Plan:
- dd)Provide necessary support in creation of pre-payment infrastructure;
- ee)PFCCL/ Utility to attend to any irregularity with respect to AMI system operation, the cause of which has been brought to its attention by the AMISP;
- ff) PFCCL/ Utility to Promptly notify the AMISP of any events or circumstances that could affect the Project outcomes, or the AMISP's Services and obligations under this Contract;
- gg)Utility to allow AMISP (and/or its implementation partner, investor(s), authorized agency) unfettered access to network operation cum monitoring centre. Such covered and enclosed space as required by AMISP shall be provided to it by Utility free of cost during the Contract Period;

- hh)Cooperate with AMISP in arranging financing for the Project, including by signing any relevant documents (such as substitution Contract) and providing such approvals, no-objections and waivers as may be required by investors/lenders;
- ii) Appoint and notify to AMISP of the names and contact details of PFCCL/ Utility representative and its dedicated staff for the Project
- jj) PFCCL/ Utility to maintain consumer expectations basis the consumer engagement plan;
 - kk) PFCCL/ Utility to Certify Installation Milestone in accordance with the provisions of this Contract.
 - II) PFCCL/ Utility to facilitate AMISP for the timely implementation of the AMI Project and for its successful operation and maintenance during the Contract Period;
 - mm) PFCCL to release payments to AMISP as per agreed terms;
 - nn)Utility at its own cost, replace or repair existing equipment (other than AMI systems), such as poles, cables including consumer service lines, and transformers etc. where necessary to make the AMI system operational and/ or safe from hazards and maintain in proper working condition all portions of all facilities that are not included in the AMISP's scope of maintenance;
 - oo)Provide all other necessary support as may be required time to time.

2. Supply, installation, integration, testing and commissioning of:

2.1 Smart Meters

The AMISP shall supply, install, integrate and commission smart meters of different types, the estimated number of which is given in the List of Materials and Services, in the Project Area throughout the Contract Period. PFCCL/ Utility shall provide details of new locations, consumer premises, Distribution transformers, feeders, boundary locations, etc. in the Project Area, where meters are to be installed from time to time.

Single phase whole current Smart Meters shall comply with technical specifications as provided in Annexure – A, three phase whole current Single Smart Meters shall comply with technical specifications as provided in Annexure – B, three phase LT-CT operated smart meters shall comply with technical specifications as provided in Annexure – C and three phase CT/PT operated smart meter shall comply with technical specifications as provided in Annexure – D. The AMISP has to furnish valid BIS certification before the supply of meters.

After meter installation, details of consumer connections, such as consumer identification no., meter ID, its hardware & software configuration, name plate details, make, type i.e. 1 Phase or 3 Phase shall be updated in the system. The information would also be updated on the consumer portal and app for providing information to consumers.

Reference, the Smart Meter communication, it is envisaged that plug and play type communication modules shall be deployed in the smart meter, for any given communication technology. These modules shall be field-deployable, with corresponding communication interface modules being used in the DCU/Gateway or BTS of wide area network in accordance with the details provided in Annexure F. The DCUs shall update the Smart meters load interval data for every 15 minutes within 10 minutes after the end of each block.

The General requirements for common pluggable module for smart meters as per Annexure F envisage a universal interface and a particular size irrespective of the choice of communication technology that defines the dimensions of the communication slot as well as physical placement and location of connectors. The same shall be adopted in all smart meters mandatorily for deployment w.e.f. 1 Jan 2023 or one year after BIS certification, whichever is later, and BIS certification taken accordingly as per IS 16444 for the same.

The Network Interface Card (NIC) / Communication Module should be integrated with at least 3 (three) makes of meters in India to enable the respective meters to seamlessly integrate with proposed HES and/or MDM thus enabling interoperability of the system. In future, it would be AMISP's responsibility to integrate new meter in

consultation with Utility or facilitate integration of other application as per the approach paper submitted under the Project Implementation Plan.

2.2 Communication Infrastructure

Establishment of communication infrastructure along with applications for Head End System (HES) and Meter Data Management system (MDM). Router based canopy type Radio Frequency (RF) network (based on RF mesh Licensed frequency band as permitted by Wireless Planning & Coordination Wing (WPC) or in Unlicensed frequency band) shall be established for communication of data between field equipment/ smart meters (wherever RF is not feasible GPRS based communication shall be established) and the cloud services shall be to cover areas of the Utility for congested/ highly populated areas. The network would provide a medium for two-way communication between various nodes (Smart Meter, Gateway/Router/Access Point/ DCU (wherever applicable)) & HES to ensure the performance levels provided in this Contract. Different nodes shall interconnect with each other using RF mesh network and they shall communicate with nearby routers/ DCU to transfer the data to access points/ HES.

The engagement of network service provider would be in the scope of AMISP to meet the performance level as given in the document. Meter data shall be routed / collected by field devices like Gateway/Router/Access Point, Data Concentrator Units (DCUs) wherever applicable given the communication technology used and transported to HES through WAN backhaul connectivity.

The following activities shall be performed to complete installation of RF Canopy:

- i. Site survey for identification of Consumers, Distribution Transformers, Feeders and Sub-Station for the installation of Smart Meters. The geographical boundary will be boundary of Sub-Divisions for conducting the site survey
- ii. Sub-Divisions wise consumer report will be prepared for implementation of Smart Metering project
- iii. The Contractor has to assess and maintain buffer so that in case of new installation, smart meters are installed by the Contractor without any delay
- iv. Site survey for selection of communication technology and telecom operator
- v. Site Survey for identification of location for installation of routers/ DCU and collectors.
- vi. Noise Analysis of RF communication through software tools.
- vii. Deployment of Canopy elements viz. Routers and Collectors.
- viii. Wherever RF is not feasible GPRS based communication shall be established.

2.2.1 General Requirements

The AMISP shall design / hire reliable, interference free & robust communication network. It shall be effective for providing communication in terrain, topology & the consumer density of the project site.

During designing, suitable consideration shall be kept for future expansion as mentioned in Annexure-E. Before designing the communication network, the AMISP shall do the site survey and would provide the most efficient communication infrastructure.

The entire infrastructure & associated civil works required for installation & commissioning of equipment/devices such as DCUs, repeaters, routers & access points etc. shall be in the scope of AMISP.

The network Solution deployed by the AMISP should have disaster recovery mechanism in place. The redundancy mechanism of HES and MDM and their disaster recovery plan shall also be highlighted by the AMISP. AMISP shall satisfy itself through the operational testing of network as a whole and its element for reliability before starting operations and billing.

The quality of installation of the various equipment & power supply wiring to all field equipment shall be as per standards/ regulations/prevailing practices of the utility. The reasonable supply of electricity needed for operation and maintenance of entire AMI system shall be the provided by the utility free of cost.

A suitable NMS shall be built to monitor the performance of the communication network round the clock. The NMS shall provide viewing of all the networking elements deployed at site and enable configuration & parameterization of the networking devices and the nodes. In case of public network such as cellular, the web-based portal (for example Open Network platform) should be provided to have the network view at location of installed devices. The portal shall have connectivity & subscription management.

A suitable digital platform (cloud-based application) and mobile apps could be provided to support field installation and capture field related activities and to manage the field operation & maintenance activity during the contract period. This platform shall manage project life cycle.

2.2.2 Network Management System

The proposed NMS shall facilitate following activities:

a) Security Management to protect systems and network from unauthorized access, manage user access, authorizing rights and privileges.

- b) Viewing of all network elements deployed in the field and administer configuration changes of the network devices and nodes through toolkits to automate the following tasks:
 - i. Capture running configuration, capture start-up configuration, upload configuration
 - ii. Compare configuration
 - iii. Real-time or scheduled capture of device configurations
 - iv. Store historical device configurations captured and enable comparison of current device configuration against a previously captured configuration
- c) Security patch management of all applications shall be encrypted and signed.
- d) Performance Management to monitor network performance as specified.
- e) Fault Management to recognize, isolate, log and identify fault on network and connected nodes, devices.

The network management software shall be based on the latest secured version of SNMP v3. The NMS shall have a simple browser-based user interface to provide all the pertinent information about the system. The NMS shall not impact the availability and performance of AMI applications and shall load not more than 1% of network bandwidth and shall have secure communication.

The Network Management Software shall have following functionality:

- a) It shall maintain performance & error statistics, and present this information via displays, periodic reports and on-demand reports.
- b) Apart from real-time monitoring of critical network devices, the above information shall be collected and stored at user configurable periodicities i.e. 5 minutes to 60 minutes. The NMS shall be capable of storing the above data for a period of one (1) year at an interval of 5 minutes.
- c) It shall maintain a graphical display for connectivity and status of peripheral devices. The monitored devices shall be configured to send SNMP notifications, and the graphical element representing the device shall change to a different colour depending on the severity of the notification received.
- d) It shall issue alarms when error conditions occur.
- e) The period over which the statistics are gathered shall be adjustable by the user and the accumulated statistics shall be reset at the start of each period.
- f) The statistics shall be available for printout and display after each period and on demand during the period.

g) In case more than one technology of AMI (example PLCC and RF between Smart Meter & DCU) deployed in the field. It shall maintain statistics on the performance and availability of node being delivered per AMI technology.

2.2.2.1 NMS Requirements Specific to HES

The Network Management System (NMS) function within the HES shall manage communication network and its associated devices and monitor the performance of network. This module shall provide real time information about the IP network and its associated NAN/WAN modules in the field device/s.

- a) NMS shall be able to collect parameters viz. terminal status, device status, next hop information, RF / PLC signal strength, Hardware/software version numbers, communication logs/events etc. For cellular WAN network, it shall be able to constantly monitor the meter WAN module for its connectivity and signal strength and quality
- b) NMS function shall be able to perform ping & trace-route to an individual and a group of Nodes (NAN / WAN), Routers /Gateways / Access Point, DCU.
- c) NMS function shall routinely check the logged in status of the end node / field device and its availability in the network for data exchange. In case of failure to get the 'alive' message from the end node/field device, it shall mark and notify the node as logged out. It shall be also possible to restart of a node (NAN/WAN) as well as trigger a hardware reset of the node.
- d) NMS function should be able to collect and store monitoring profiles from End Points (NAN/WAN modules) and network devices for performance evaluation, and troubleshooting purposes. Historical logs of monitored profiles shall be available analysis through standard reporting tool.
- e) If GIS is enabled, then topology, location (lat/long) and status of all network nodes shall be visible on GIS map.

2.2.3 Network Protection & Security

The AMI Network shall have adequate cyber security measures not limited to the measures as described below. The network security would be extended to all the interfaces also.

Secure Access Controls: The system shall include mechanisms for defining and controlling user access to the applications environment. Best practices

from enterprise security including password strength, password aging, password history, reuse prevention etc. must be followed for access control.

Authorization Controls: A least-privilege concept such that users are only allowed to use or access functions for which they have been given authorization shall be available.

Logging: Logs must be maintained for all attempts to log on (both successful and unsuccessful), any privilege change requests (both successful and unsuccessful), user actions affecting security (such as password changes), attempts to perform actions not authorized by the authorization controls, all configuration changes etc. Additionally, the access to such logs must be controlled in accordance to the least-privilege concept mentioned above, so that entries may not be deleted, accidentally or maliciously.

The overall cyber security policy and implementation shall account for:

- a) Prevent unauthorized users from reading or writing data or files, executing programs or performing operations without appropriate privileges.
- b) Document all user sign on procedure
- c) Record all network traffic for detecting unauthorized activity, unusual activity and attempts to defeat system security (AMISP to propose and document what constitutes normal activity/traffic)
- d) A user authentication scheme consisting of at least a user identification and password shall be required for the user to request a connection to any network node.
- e) GUI to provide role-based access based on user identity and user role. Shall have following types of users:
 - i. Administrator
 - ii. Operator
 - iii. Field staff
 - iv. Viewer/Guest

2.2.4 Communication Network Elements

Following sections provide detail on both DCU based communication network and router-based RF mesh network. The AMISP shall select relevant parts as applicable for designing and establishing communication infrastructure. The network, shall be horizontally and vertically scalable to accommodate future meter installations upto 6 lakh meters. The network elements may be comprised of the following.

2.2.4.1 Data Concentrator Unit (DCU) based Communication Network

The Data Concentrator Unit is a gateway for communication of data between the Smart Meters and the HES. The Data Concentrator Unit receives information from the Smart Meter on a scheduled / need basis and passes it on to HES / MDM.

The DCU provides the central link between Smart Meters and HES, enabling continuous/periodic meter read and control. DCU shall exchange data from Smart Meters on RF / PLCC communication and with HES on WAN.

2.2.4.1.1 Hardware & Power Supply of DCU

- a) Enclosure/box of DCU shall be IP65 or better compliant. A suitable mounting arrangement required for DCU installation shall also be provided.
- b) A suitable and optimum power supply shall be provided keeping in view that even in case of outage in one or two phases, DCU can be powered. DCU should be capable of withstanding surges & voltage spikes of 6 kV. Power supply shall be terminated on suitable sized Miniature Circuit Breaker (MCB) to facilitate isolation during on-site maintenance.
- c) DCU shall have battery with backup for 1(one) hour for normal meter reading, to push tamper event, carry out on demand reading and the network health status/ connectivity continuity & check. DCU should have the suitable feature to send power outage and restoration message to the HES.
- d) DCU shall have built-in Real Time Clock (RTC) with separate battery backup. It shall have self- diagnostic feature for RTC, memory, battery, communication module, etc.

2.2.4.1.2 Configuration, Functionality & Interface of DCU

DCU shall have following configuration functionalities / tools:

- a) Configuring the communication with underlying nodes/meters.
- b) Communication of data from the field devices and push the data at configured intervals to the HES. It should also support the HES in pulling data from the field devices/meters. The data acquisition (Push/Pull) frequency shall be configurable. DCU shall be capable to prioritize control commands.
- c) DCU shall ensure a secure communication to HES and shall have internal memory for storing interval data for at least 5(five) days. This

- storage shall be in non-volatile memory as opposed to battery backed memory.
- d) DCU shall support on demand read and ping of individual/group of meters.
- e) It shall support IPv6 network addressing.
- f) DCU shall push events such as tamper, power off etc. to HES immediately on occurrence/receipt from field devices/meters.
- g) The equipment shall be weatherproof, dustproof and constructed for outdoor installation on poles (minimum rating: IP65). A suitable mounting provision shall be made for the equipment.
- h) Enclosure: Provision for security sealing shall be provided and in case the gasket of the cover is used for protection against moisture, dust and insects, the gasket shall be made of weather and aging resistant material.
- i) The list of standards followed in all the devices/equipment used in communication network shall be furnished. The AMISP shall provide all the configuration requirements to the Utility for integrating any Third party DCU's with the HES supplied by the AMISP

2.2.4.1.3 DCU Communication

- a) The DCU shall ensure the appropriate backhaul for secure transfer of data to HES either via cellular or Fiber Optic communication. In case of cellular backhaul, it shall support SIM card / e-SIM with dynamic/static IP as the architecture demands from any service provider. It shall have Wide Area Network (WAN) connectivity to the HES through suitable means. Best available link shall be used to connect to HES.
- b) DCU shall be able to communicate with meters through a secured, standard communication protocol between meter and DCU.
- c) DCU shall periodically monitor meter reads/downstream commands and shall retry and reconnect in case of failed events/reads.
- d) It shall push events such as tamper, power off etc. to HES immediately on occurrence/receipt from field devices/meters. DCU shall be able to acquire and send data to HES for full capacity (as per designed for no. of meters/field devices) to ensure the performance level. Full capacity of DCU is required to be indicated in the offer.

- e) On restoration of power supply, DCU shall establish communication with underlying devices as well as upstream application automatically.
- f) DCU shall be able to communicate with the nearest meters.
- g) Remote firmware upgrade: The DCU shall support remote firmware upgrades as well as remote configuration from the Network Operation cum Monitoring Centre (NOMC)
- h) DCU shall facilitate recording of minimum of the following events at HES (for 7 days):
 - i. No of packet failures
 - ii. Retry attempts
 - iii. Missed periodic readings
 - iv. Failure to connect
 - v. Tamper events

2.2.4.2 Gateway/ Router/ Access Point based RF Mesh Network

In this type of communication network, different network nodes including end points (Smart Meters) shall interconnect with each other using RF mesh network and they shall communicate with nearby gateways/ routers to transfer the data to access points. If any gateways/ routers/ repeaters/ access points fail, then nodes connected on that device shall automatically reconfigure the mesh with available nearby nodes.

2.2.4.2.1 General Requirement of RF Mesh Network:

- a) The communication network shall have dynamic & self-healing capability. If one of the communication elements such as gateways/ routers/ access points fails, then nodes connecting to that element shall switch to best available element for communication of data to HES.
- b) It shall support IPv6 network addressing.
- c) Each node shall keep a track of best available nearby nodes or access points.
- d) The communication network equipment shall use Unlicensed or Licensed frequency band as permitted by WPC/Statutory Bodies as applicable.

- e) All the communication network equipment shall be as per WPC guidelines, Government of India for operation in licensed / license free frequency band.
- f) Suitable NMS shall be available to monitor the performance of the communication network round the clock. The NMS shall provide viewing of all the networking elements deployed at site and enable configuration, parameterization of the networking devices and the nodes.
- g) It shall support remote firmware upgrading
- h) It shall be secure enough to avoid all cyber threats
- The communication network shall ensure secure communication of data to HES.
- j) The equipment shall be weatherproof, dustproof and constructed for outdoor installation on poles (minimum rating: IP65). A suitable mounting provision shall be made for the equipment.
- k) The list of standards followed in all the devices/equipment used in communication network shall be furnished.

2.2.4.2.2 Configuration, Functionality & Interface

Access points shall have following configuration functionalities:

- a) It shall be able to configure the communication with underlying nodes/end points.
- b) It shall support on demand read and ping of individual/group of meters.
- c) It shall push events such as tamper, power off etc. to HES immediately on occurrence/receipt from field devices/meters.
- d) It shall have Wide Area Network (WAN) connectivity to the HES through suitable means.
- e) It shall communicate with gateways/ routers/ nodes/ end points/ access points on RF mesh network (Unlicensed or Licensed frequency band as permitted by WPC/Statutory Bodies in country of deployment as applicable).
- f) It shall periodically monitor meter reads/downstream commands and shall retry and reconnect in case of failed events/reads.
- g) After power Interruption, on restoration of power supply, it shall establish communication with underlying devices as well as upstream application (HES) automatically.

- h) Access point shall facilitate recording of minimum of the following events at HES (for seven (7) days):
 - i. No of lost packets
 - ii. Retry attempts
 - iii. Missed periodic reading
 - iv. Failure to connect
 - v. Tamper events
- i) It shall be capable to handle interval data of suitable nos. of any type of Smart Meter. Access point shall be able to acquire and send data to HES for full capacity (No. of meters/field devices it is designed for) within a suitable time period to achieve the performance level. Full capacity of access point is required to be indicated in the offer.
- j) Gateway / Router / Access point shall support remote firmware upgrades as well as remote configuration from the Network Operation cum Monitoring Centre.
- k) The Gateway / Router / Access Points shall have provision to maintain the time and date information and shall always be in Time synchronization to the HES server via NTP to sub second accuracy. The Gateway / Router / Access Points, shall support time distribution to each Mesh Node

2.3 Head End System (HES)

The main objective of HES is to acquire meter data automatically avoiding any human intervention and monitor parameters acquired from meters.

The AMISP shall provide a HES which is suitable to support the collection and storage of data as per performance level for a defined no. of Smart Meters with facility of future expansion with scalability features considering increase in number of consumers of the Utility for next 15 years as per the requirement specified in this document.

HES shall be responsible for discovery of all Smart Meters once deployed in the field, the periodic collection of all meter data as well as the processing of all alarms and commands such as connect/disconnect for those meters.

HES would perform all the requisite functions as per the defined functionalities of AMI and it is the responsibility of the AMISP to supply the requisite software and hardware to achieve the defined functionalities of AMI. HES shall ensure data integrity checks, for example, checksum, time check, pulse, overflow, etc. on all metered data.

HES shall be developed on open platform based on distributed architecture for scalability without degradation of the performance using additional hardware. AMISP shall establish the Back-End IT system with scalability features to handle all consumers of the Utility for next 15 years. The scalability shall ensure the ability to handle applicable workloads including the following: (an indicative list of parameters is provided below)

- a) Up to 6,00,000 numbers of meters installed
- b) 15 mins interval meter reads
- c) 50,000 users requesting data from meters
- d) Other events and statuses coming from meters as per IS16444.

The HES shall be cloud enabled and support deployment with high availability clustering and automatic load balancing that ensure hardware as well as application failover. Adequate data base and security features for storage of data at HES need to be ensured.

The suggested functions of HES (not exhaustive) may be:

- a) On power up after installation, Smart Meter shall register itself automatically into the HES along with its metering profile. The HES shall store meter profile status by meter type, hardware & software versions, device IDs, logged in / logged out details etc.
- b) Upon deployment and establishment of communication, it shall be possible for field level end device nodes (NAN/WAN) like Router/Gateway, Access Point, DCU to have self-discovery and registration.
- c) Acquisition of meter data on demand & at user selectable periodicity. On demand meter read may be for single meter (unicast) or for a group of meters (multicast).
- d) Two-way communication with meter/ DCU
- e) Signals for connect & disconnect of switches present in end points such as meters. This facility shall be provided for both single meter (unicast) as well as for a group of meters (multicast).
- f) Audit trail and Event & Alarm Logging
- g) Ability to redirect messages including configuration commands from the MDM in order to reach the desired meter
- h) Maintain time sync with DCU / meter
- i) Store raw data for defined duration (minimum 3 days). HES shall hold the data before it is transferred to the MDM
- i) Handling of Control signals / event messages on priority
- k) Manage time distribution to ensure that nodes / meters always have an accurate RTC using NTP servers. The time distribution mechanism shall take into account the network latencies.
- Setting of Smart Meter configurable parameters
- m) Critical and non-critical event reporting functionality

n) Device management functionality to get periodic updates from devices on health check, hardware & firmware version, location mapping etc.

2.3.1 Configuration

HES shall facilitate configuration of following minimum AMI parameters:

- a) Load profile capture period
- b) Demand integration period
- c) Setting of parameters for TOU billing
- d) Prepaid / post-paid configuration
- e) Net metering
- f) Billing date / month-to-date for prepaid meters
- g) Clock setting/time synchronizations
- h) Load curtailment limit
- i) Event setting for connect/disconnect
- j) Number of auto reconnection attempt
- k) Time interval between auto reconnection attempt
- I) Lock out period for endpoint (meter) relay
- m) Remote firmware update: It shall be possible to update the firmware of the meters in both Unicast (one to one) and in Multicast fashion (Group of meters). It shall be also possible to have remote firmware upgrade for an individual and a group of nodes (NAN/WAN, Routers/Gateways/Access Point, DCU.
- n) Password setting
- o) Push schedule
- p) Setting threshold limits for monitored parameters

The AMISP may suggest more parameters as per the requirement.

2.3.2 Communication

The following communication functions with network devices shall be supported:

- a) HES shall communicate with DCUs/access points using WAN technology
- b) HES shall encrypt data for secure communication

- c) HES shall be able to accept data according to IS 15959 part-2 /part 3 and latest amendments
- d) HES shall automatically retry for missed data; the number of retry attempts shall be configurable
- e) To receive confirmation on successful execution of a command
- f) HES shall ensure data integrity checks, for example, checksum, time check, pulse, overflow, etc. on all metered data

2.3.3 Monitoring and Reporting Capability

HES shall have critical and non-critical reporting functionality. The critical & non-critical information generated from this reporting functionality shall be made available to MDM at user configurable periodicity. The reports shall be able to be exported to Excel for further processing by the utilities

2.3.3.1 Critical Reporting

HES shall have alarms and keep record of following events:

- a) Event log for node's (meter) events such as tamper/power failures etc.
- b) Data not received from nodes/end points
- c) Relay does not operate for connect / disconnect
- d) Communication link failure with nodes/end points
- e) Network Failure
- f) Power Failure

2.3.3.2 Non-Critical Reporting

HES shall report and keep record of following communication failure events:

- a) Retry attempts
- b) Missed periodic reading
- c) Failure to connect

HES shall support reporting of communication failure history of nodes/routers/access points etc. and give an exception report for nodes/routers/access points not communicating for last 0-24 hours (the reporting period shall be on user configurable period). HES shall have feature to send email/SMS notification of configured alarms & events to its users.


2.3.3.3 Integration

HES shall export all meter data to MDM and pass control commands from MDM. HES should conform to IEC 61968-9 as well as support CIM 2.0 / MultiSpeak v3.0 standards. It may use any other standard interfaces as outlined in the approach paper, submitted as part of project implementation plan, for integrating with the MDM. In case, utility has implemented any Service Oriented Architecture (SOA)/ Enterprise Service Bus (ESB) architecture, the data exchange to and from HES shall be through this ESB.

The data collected by the Network Management function of the HES shall be integrated with overall Data Centre level NMS module for easy monitoring, analysis and reporting.

Integration Layer platform as a service should be a managed service and should provide industry standard integration platform to support standards base integration with following capabilities:

- Drag & Drop User interface to build integrations
- Service Oriented architecture supporting both SOAP & REST protocols
- Data transformations
- Pre-built adaptors like file, database, messaging, REST, SOAP, file transfer etc.

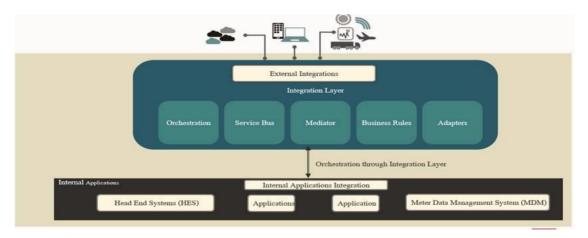

The Analytics Platform should be as per the following:

- Analytics platform should offer out-of-the box advance analytics capabilities such clustering, Regression, Trends and Forecast
- Analytics platform should be capable of providing automatic Machine Learning Capabilities to provide predictive analytical capabilities.
- Analytics platform should extend analytics with mobile responsive platforms and mobile app to visualized & share data over iOS & Android
- Proposed service should be in Gartner Magic Quadrant of Analytics & Business Intelligence Platforms, most recent one
- Should provide Data Preparation capability in terms of graphical interface to message/ transform the data for analysis.

- Should provide machine learning capability to generate narration from visualization
- Should provide intuitive natural Language processing interface like search to generate visualizations both from browser & mobile app
- Should provide ability to embed data visualization to external website of department
- Should provide capability to call machine learning capabilities both at analytical engine level & database level
- Should be able to export visualization to power point, image, pdf or email.
- Should be able to provide custom images as background maps
- should provide Location Match Feature to Identify incorrect Matches in Maps with auto focus map visualization
- should provide integration to call machine learning models built in data warehouse into analytics platform for visualization & forecasting etc
- should provide integration to consume spatial operators for Spatial analytics Insights to enable location base analysis

The Data Integration Platform should be as per the following:

- Data Integration ETL tool should provide native access to Industry leading RDBMS and The solution should provide integrated workflow scheduling, automatic load balancing
- Data Integration ETL tool should provide for Multiple-user design environment with a governance mechanism to prevent corruption of data integration related objects, also supports collaboration on large, enterprise wide projects.
- Data Integration should generate code for ETL process flows created through the GUI which can be viewed / edited by the developers if required
- Data Integration should provide the ability to create User Written Code transformations, which allows leveraging custom code as part of the ETL process flow
- Data Integration should provide the capability to create customized transformations which can be reused across ETL process flows
- Data Integration should have the capability for ELT processing which facilitates execution of the process flow inside a database, providing enhanced execution and performance
- Data Integration should have ability to perform the complete process of extracting and transforming the data and loading it into a Datamart and generate reports as part of the same ETL process
- Data Integration should provide the capability to display warnings of a job being changed since previous open, with a brief description of the change, to facilitate use in a collaborative user development environment
- Proposed offering should be in Gartner Magic Quadrant of Data Integrator Platforms, most recent one

The Availability and Manageability in terms of ability to manage, monitor and modify resources in cloud should be 99.5%.

2.4 Meter Data Management system (MDM)

The Meter Data Management system (MDM) shall support storage, archiving, retrieval & analysis of meter data and various other MIS along with validation & verification algorithms. The MDM shall be a scalable and COTS product. It shall act as a central data repository with interactive dashboard. MDM shall have capability to import raw or validated data in defined formats and export the processed and validated data to various other systems sources and services in the agreed format. It shall provide validated data for upstream systems such as billing, analytics, reporting, etc.

As mentioned in Clause 1.2 (g) of this Schedule, MDM should support the future requirement of utility by way integration with other smart grid functionalities as listed in Clause 1.2 (g) as and when implemented by Utility. In this effort, the methodology as outlined in the approach paper shall be followed.

The key use cases to be enabled by AMISP are provided below. Please note that these are illustrative list of use cases only and is not an exhaustive list. Further please note that all IS Standards shall be applicable.

Sr.	Use Case Activity Description	Source	Destinatio n	Info Exchanged
1.	Scheduled Meter Read Autom	atically fro	m Consumer	Premises
1.1	At scheduled frequency meter sends data to HES. Consumption details including non-critical events will be in 15 min block data, and data could be incremental to what was sent by meter in preceding instance	Meter	HES	Meter Number, reading date & time, kW, kVA, kWh, kVAh, PF, Non-critical Event Code / Date
1.2	At scheduled frequency meter sends billing Data to HES	Meter	HES	Meter Number, reading date & time, kW, kVA, kWh, kVAh, PF
1.3	Scheduled meter data reaches MDM	HES	MDM	Meter Number, reading date & time, kW, kVA, kWh, kVAh, PF, Non-critical Event Code / Date
2.	Remote Meter disconnection	/ reconnect	ion	
2.1	Meter re-connect / disconnect operation command	MDM	HES	Meter Number, group of meters, instruction to close switch
2.2	Consumer meter re- connection / disconnection	HES	Meter	Meter number, action (reconnect/ disconnect)
2.3	Connection Status Update	Meter	HES	Meter Number, switch status
2.4	Connection Status Update	HES	MDM	Meter Number, group of meters, switch status
3.	Utility detects tampering at co	onsumer sit	е	

Sr.	Use Case Activity Description	Source	Destinatio n	Info Exchanged
3.1	High priority events captured by Meter sent to HES as and when occurred	Meter	HES	Meter Number, event date & time, event Code /description
3.2	High priority events reach MDM for further action.	HES	MDM	Meter Number, event date & time, event Code /description
3.3	Share with WFM to Notify utility personnel for site inspection	MDM	WFM	Consumer number, Meter Number, Tamper code, address
3.4	On analysis and detection of valid tamper event (reconfirmed by WFM) or malfunction, connection is disconnected.	MDM	HES	Consumer number, meter number, action to be triggered (disconnect), action date & time
3.5	HES sends disconnect command to meter	HES	Meter	Meter Number, action (disconnect)
3.6	Tamper event shared with CIS/CRM. Billing determinants are updated for tamper invoicing	MDM	CIS/ CRM	Meter Number, event date & time, event Code /description
3.7	Meter re-connection order once tamper issue is resolved	MDM	HES	Meter number, action (reconnect)
3.8	HES sends re-connect command to meter	HES	Meter	Meter Number, action (reconnect)
4.	Missed interval readings			
4.1	On identifying missed interval, HES will re-acquire data for the missing period from meter	HES	Meter	Meter Number, from date & time, to date & time (for which data is missing)
4.2	On receiving data request command, meter will send data to HES	Meter	HES	Meter Number, reading date & time, kW, kVA, kWh, kVAh
4.3	Missed Interval and Reads Data acquired by MDM	HES	MDM	Meter Number, readings with date & time
5.	Consumer connection outage	/restoration	n event	
5.1	Outage/restore event recorded by meter is sent to HES as and when event occurs	Meter	HES	Meter Number, Outage / restoration Date / Time, Power On or Off count
5.2	Outage / Restoration Notification	HES	MDM	Meter Number, Outage / restoration Date / Time, Power On or Off count
5.3	Sharing Outage / Restoration Notification	MDM	OMS/CIS- CRM	Meter Number, Outage / restoration Date / Time, Power On or Off count
5.4	Meter read request from OMS	OMS	$MDM \rightarrow$	Meter Number,

Sr.	Use Case Activity Description	Source	Destinatio n	Info Exchanged
	to identify service outage / restoration		HES	
5.5	Meter responds to event poll from HES	Meter	HES	Meter number, Status (live/dead)
6.	Remote firmware upgrades/ n	neter config	uration char	nges
6.1	Remote firmware upgrade	MDM → HES	Meter	Firmware
6.2	Configuration Commands: Change tariff parameters, Synchronize clock, Registers reset (status, max, tampering)	MDM → HES	Meter	Meter number, tariff parameters, registers status, event type and priority
6.3	Status update of Firmware / Configuration	Meter	$\begin{array}{c} HES \to \\ MDM \end{array}$	
7.	Load monitoring at demand s	ide		
7.1	When there is a load violation event recorded in the meter, the information is sent to the CC	Meter	HES → MDM	Meter Number, max demand, date & time of load violation
8.	Time synchronization			
8.1	Synchronising RTCs of meters / DCUs/ACP	HES	DCU/Meter	Time Setting
9.	Metering network changes			
9.1	Change / new installation in Meter / DCU Network Hierarchy	Meter / DCU	HES	Network identification info including DCUs
9.2	Change / new installation in Meter / DCU Network Hierarchy	HES	MDM	Network identification info including DCU
10.	New consumer connection			
10.1	Receive verified pre & post- paid new consumer requests	CIS-CRM/ Billing	MDM	Consumer name, address. Connection request etc.
10.2	Generate meter installation order	MDM	WFM	Consumer ID & details
10.3	Receive meter installation report	WFM	MDM	Meter number, DT no, Feeder & reading
10.4	Requesting instant, interval & events data from meters	MDM	HES → Meter	Meter Number, Reading date & time, reading params (kWh, kVAh, kW etc.)
10.5	Acquire instant, interval / events data from meter by HES which then reaches MDM system.	HES	MDM	Meter Number, Reading date & time, reading params (kWh, kVAh, kW etc.)
10.6	Once new meter remote read verification is over, confirm	MDM	Billing / CIS-CRM	Consumer ID, Consumer address, Meter Number, initial

Sr.	Use Case Activity Description	Source	Destinatio n	Info Exchanged
	new connection with other applications			reading etc.
11.	Migrate post-paid consumer t		node	
11.1	Receive migration request	CIS-CRM/ Billing	MDM	Migration request for post-paid consumer with profile
11.2	Setup prepaid consumer profile in prepaid engine. If no change in meter is required, skip next two steps	MDM	Prepaid Engine	Prepaid consumer profile
11.3	Generate prepaid meter installation order if required	MDM	WFM	Consumer ID & details
11.4	Receive meter installation report	WFM	MDM	Meter number, DT no, Feeder & reading
11.5	Enable prepaid mode in meter	Prepaid engine	HES → Meter	Engineering token
11.6	Receive activation confirmation	HES	MDM	Activation status
11.7	Request instant, interval & events data from meter	MDM	HES → Meter	Meter Number, Reading date & time, reading params (kWh, kVAh, kW etc.)
11.8	Acquire instant, interval / events data from meter by HES which then reaches MDM system.	HES	MDM	Meter Number, Reading date & time, reading params (kWh, kVAh, kW etc.)
11.9	Once meter remote read verification is over, share migration request completion detail with other modules	MDM	Billing / CIS-CRM	Prepaid consumer profile
12.	Migrate prepaid consumer to	post-paid n	node	
12.1	Receive migration request	CIS-CRM	MDM	Migration request for prepaid consumer with profile
12.2	Request meter data	MDM	HES → Meter	Meter Number, Consumer ID
12.3	Acquire instant, interval / events data from meter by HES which then reaches MDM system.	HES	MDM	Meter Number, Reading date & time, reading params (kWh, kVAh, kW etc.) with balance credit
12.4	Send meter disconnect command	MDM	HES → Meter	
12.5	Receive connection status	HES	MDM	Disconnect status
12.6	Enable post-paid mode in meter	MDM	HES → Meter	Engineering token
12.7	Receive activation of post- paid mode	HES	MDM	Activation Status

Sr.	Use Case Activity Description	Source	Destinatio n	Info Exchanged
12.8	Request instant, interval & events data from meter	MDM	HES → Meter	Meter Number, Consumer ID
12.9	Acquire instant, interval / events data from meter by HES which then reaches MDM system.	HES	MDM	Meter Number, Reading date & time, reading params (kWh, kVAh, kW etc.)
12.1 0	Once meter remote read verification is over, share migration request completion detail with other modules	MDM	Billing / CIS-CRM	Post-paid consumer profile and meter data along with credit balance
13.	Consumer Registration in Co	nsumer Por	tal/ App	
13.1	Consumer clicks on new user on consumer portal/ App, provides RMN or email ID and submits data	Portal/ App	CIS/ CRM	Request for registration with RMN/email ID
13.2	Utility receives request for registration and sends OTP after verification	CIS/ CRM	Email/Mes sage Gateway	ОТР
13.3	Consumer submits OTP	Portal/ App	CIS/ CRM	
13.4	Consumer receives registration detail	CIS/ CRM	Email Gateway	Login ID and default password
13.5	Consumer submits first login request	Portal/ App	CIS/ CRM	
13.6	System seeks password change	CIS/ CRM	Portal/ App	
13.6	Consumer changes default password	Portal/ App	CIS/ CRM	
14.	Consumer Access to Consum	ption, Billir	ng & Profile I	Data
14.1	Consumer logs in to Portal/ App	Portal/ App	MDM	
14.1	Consumer Profile for Portal/ App	CIS-CRM	MDM →Portal/ App	Name, Account, Address, Service Points, K Number
14.2	Consumption Data	MDM	Portal/ App →UI	Consumption profile
14.3	Billing (post-paid) / Credit Balance (prepaid)	Billing → MDM	Portal/ App	Post-paid Billing history/ Current Bill, Prepaid Recharge history
15.	Prepaid Consumer Recharge			
15.1	Consumer logs into Portal / Mobile App	Mob App / Portal	UI	Login
15.2	Consumer fills-in required	Ul→	Payment	Consumer ID, Recharge

Sr.	Use Case Activity Description	Source	Destinatio n	Info Exchanged
	detail in UI and requests recharge	Prepaid App	Gateway	amount
15.3	Consumer selects payment method	Payment Gateway	Net banking /Credit Card / Wallet etc.	
15.4	Consumer receives payment acknowledgement	Payment Gateway	Prepaid App→Port al→Ul	
15.5	Calculate credit balance for prepaid consumer & update prepaid meter	Prepaid App	HES→Mete r	Consumer credit balance (virtual token)
15.6	Notify credit balance to consumer	Prepaid App	Email/SMS Gateway	Credit Balance
16.	Post-Paid Consumer Bill Payı	ment		
16.1	Consumer logs into Portal / Mobile App	Mob App / Portal	UI	Login
16.2	Consumer is presented with Billing history and current outstanding Bill	Billing → MDM	Portal/ App→Ul	Outstanding Bill
16.3	Consumer requests bill payment. Option to download bill	UI→Billing	Payment Gateway	
16.4	Consumer selects payment method	Payment Gateway	Net banking /Credit Card / Wallet etc.	
16.5	Consumer receives payment acknowledgement	Payment Gateway	Billing→ Portal/ App→UI	
16.6	Payment acknowledgement through email/SMS	Billing	Email/SMS Gateway	Payment acknowledgement
17.	Consumer Service Request			
17.1	Consumer logs in to Portal/ App	Portal/ App	CIS/ CRM	
17.2	Consumer requests for service	UI	CIS/ CRM	Service request
17.3	System assigns SRN & sends acknowledgement	CIS/ CRM	Portal/ App→UI, Email/SMS Gateway	
17.4	System resolves request &	CIS/	Portal/	

Sr.	Use Case Activity Description	Source	Destinatio n	Info Exchanged
	updates consumer records	CRM	App→UI, CIS/CRM	
17.5	System closes SRN	CIS/ CRM	Email/SMS Gateway	
18.	Consumer Complaints			
18.1	Consumer logs into Portal/ App	Portal/ App	CIS/ CRM	
18.2	Consumer registers complaint	UI	CIS/ CRM	Specific complaint
18.3	System assigns CRN & sends acknowledgement	CIS/ CRM	Portal/ App→UI, Email/SMS Gateway	
18.4	System assigns resolution based on nature of complaint	CIS/ CRM	CIS / OMS / WFM	
18.5	Target system reports completion of complaint	OMS / WFM	CIS/ CRM	
18.6	System updates records and closes CRN	CIS/ CRM	CIS, Email/SMS Gateway	
19.	Demand read of meters from	consumer p	oremises	
19.1	Requesting instantaneous, interval, load profile & events data from meters	MDM	HES→Mete r	Meter Number, Reading date & time, reading params (kWh, kVAh, kW etc.)
19.2	Acquire instant, interval, load profile & events data from meters by HES which then reaches MDM system.	Meter→ HES	MDM	Meter Number, Reading date & time, reading params (kWh, kVAh, kW etc.)
20.	Staff User Access to Utility Po			
20.1	User logs in to Portal	Portal	MDM	Login with appropriate credentials
20.2	User selects available functions	MDM	Portal → UI	
20.3	User logs out	Portal → UI	MDM	

The SMS alerts to the consumers regarding their abnormal usage pattern, balance amount alert may also be pushed to Consumer Mobiles App through notification.

The AMISP shall specify and deliver an initial system that supports the collection and storage of data for meeting the performance level for about 4.04 lakh Smart Meters as mentioned in the RfP with facility of future expansion.

The MDM shall have the ability to selectively choose which data to be maintained and which to be purged or archived as per requirement of Utility (user selectable)

2.4.1 Asset Management

- a) The MDM shall maintain information and relationships between the current installed meter location (apartment, shop, industry/ address etc.), Consumer information (Name etc.), Consumer account no, Meter ID, Type of Meter (type of consumer, 1 phase/ 3phase, with or without relay, etc.), Meter configuration (Demand integration period, Load profile capture period etc.), GIS supplied information (longitude, latitude, connection with feeder/ transformer/ pole etc.) etc.
- b) The software should support tracking the status of meters and communication equipment from the date when they are installed in the field. The history of in-service asset location is maintained throughout the device life with start and end dates associated with each in-service location reference.
- c) Ability to report and log any damage / deterioration in the meter attributable to consumer /utility.

2.4.2 AMI Installation Support

- a) The MDM shall also support device lifecycle management from device registration, installation, provisioning, operations and maintenance to decommissioning etc. The MDM shall generate exceptions for meter or modules not delivering the correct meter data after installation.
- b) The MDM shall provide a reconciliation report that identifies the meters that have been installed but not communicating for a designated (configurable) period. MDM shall generate reports on the number of meters installed in comparison to the number of meters successfully communicating.

2.4.3 Meter Data

- a) The MDM shall accept input, process, store, and analyze Meter data from HES and meter data collected through handheld meter reading instruments and manual meter reads. In case of manual reads, provision should be there to insert associated notes such as assessed energy, etc. It would responsibility of AMISP for manual meter reading in case of any communication failure, etc. with seven (7) days of such failure.
- b) The MDM should accept input, process, store, and analyze non-billing meter data such voltage and power quality data (such as under/over voltage, out of band frequency, etc.) as they are available from HES. The MDM should also support schedule and on-demand meter reads and pinging of meter energized states by authorized users and by other utility systems.

- c) The MDM shall provide storage and retrieval of all collected Meter Data, events and alarm. It shall have capacity of storing 5 years data (as required by the utility based on regulatory provisions) via archiving.
- d) The archiving of data should be done at a frequency of x and all data older than x days/hours should be archived. AMISP's solution should describe the process of archiving and restoration from the archive.
- e) Correctly track & resolve energy usage across meter changes with no loss of individual meter data.
- f) Provide complete history and audit trail for all data collected from meters including commands sent to meters and other devices for 30 days (configurable period).
- g) Execute on-demand read processes.
- h) Handle special metering configurations such as net metering/pre-paid metering/multiple meters at same premises.
- i) The MDM shall have the ability to manage at a minimum 5-minute interval data.
- j) The AMISP shall ensure data integrity checks on all metered data received from data collection systems.

2.4.4 Data Validation, Estimation, and Editing (VEE)

- a) The validation and estimation of metered data shall be based on standard estimation methods (such as max/avg. of past three days, max/avg. of past X number of similar weekdays, max/avg. of similar blocks of past X numbers of similar weekdays, etc.). The MDM should also support and maintain following data-
 - Registered Read Data including register reads, daily billing cycle, as well as derived billing determinants such as TOU
 - ii. Interval Data channels with variable intervals and variable units of measure
 - iii. Calculated Data that is derived or computed such as billing determinants and aggregated loads.
 - iv. Event data storage of all collected event and alarm data from meters, network equipment, and MDM itself
- b) MDM shall flag, alarm and trigger an estimating process including but not limited to when the following anomalies occur in the cumulative ("CUM") register reads

- i. CUM decrements within a billing cycle (except net-metering)
- ii. CUM reads increments more than configurable threshold
- iii. Future or old read dates
- iv. Number of digits exceeds number of meter dials
- MDM shall detect, flag, alarm and trigger an estimating process including but not limited to when the following anomalies occur in Time of Use (TOU) register reads
 - i. Register decrements (except net-metering)
 - ii. Resets (to zero) (except net-metering)
 - iii. CUM reads increments more than configurable threshold
 - iv. Future or old read dates
 - v. Erratic compared to CUM read (sum of TOU reads minus CUM read)
- d) MDM shall detect, flag, alarm and trigger an estimating process including but not limited to when the following anomalies occur in Demand register reads
 - i. Do not reset on cycle
 - ii. Do not reset coincident with consumer move-out or move-in
 - iii. Reset off cycle inappropriately
 - iv. Too high
- e) All data shall be transferred to billing system after meter data validation and estimation including transformer / feeder station wise energy audit.
- f) MDM shall estimate usage for non-metered service points such as streetlights, farm lights, traffic signals, etc.
- g) The MDM shall maintain both the original received raw data in a non-manipulated state, in addition to VEE data.
- h) Notwithstanding the latency of data collection via the AMI system, once the MDM receives meter read data, the VEE process occurs in real-time and the post-VEE data is then immediately available to user or external systems.
- The MDM shall be able to automatically flag data changes from manual edits, VEE (Validating, Editing and Estimating) rules and data source corrections and electronically generate audit trail with timestamps and userids.

2.4.5 Billing Determinants Calculations

The MDM-

- a) Shall allow configuring multiple TOU options (e.g. the number and duration of TOU rate periods) by consumer type, tariffs and day type (weekend, weekdays, and holidays) and by season.
- b) Shall support the processing of interval data into billing determinants to include the following at a minimum:
 - i. Total Consumption
 - ii. Consumption in different time blocks for ToU billing
 - iii. Maximum Demand (in kW and kVA)
 - iv. Number of tamper counts
 - v. Average power factor
 - vi. Net-Metering data
- c) Shall process interval data and frame it into the appropriate TOU periods for consumption and demand; for example, roll up 15/30-minute data intervals into hourly data.
- d) Shall have the ability to properly account for special metering situations such as check metering, sub metering, prepaid metering and net metering when calculating billing determinants and sending them to billing and other systems.
- e) Shall have the ability to properly account for special situations including, but not limited to, curtailment requests, demand response scenarios (based on use cases provided in Annexure H) when calculating billing determinants and sending them to billing software.
- f) Shall have the ability to facilitate implementation of automatic compensation payments by Utility to consumers for sustained outages when requested. Compensation calculations would require cross checking with billing and consumer balance information to ensure that disconnection is not construed as a no supply event.

2.4.6 Prepaid functionality

The MDM with the help of the corresponding HES, should be able to switch the Smart Meter between prepaid and post-paid modes by a simple change in configuration of the Smart Meter firmware remotely. The following prepaid functionality shall apply

- a) MDM shall use consumer attributes from Consumer Care System (CCS) and/or Utility Billing system to,
 - i. enrol and setup new prepaid/ post-paid consumers
 - ii. migrate existing post-paid consumers to prepaid mode and vice versa
- b) An appropriate pre-payment application engine shall support the prepayment metering capability through the delivered system.
- c) The prepayment system shall ensure that payment and connection parameters are stored centrally, and the details are updated to CIS-CRM/ MDM through consumer portal/ app as per Clause 2.5 of this Section. Information required by consumer's Mobile App and web portal are shared in near real time.
- d) Prepaid consumers shall be provided facility to recharge their account by logging on to the consumer portal/app as per Clause 2.5 of Schedule A of this Contract.
 - The user interface shall be integrated with the present online payment gateway of the utility. Additional payment gateways shall be implemented if required
 - ii. The payment gateways shall facilitate payments through on-line banking, credit cards and payment wallets
- e) A prepaid mobile application functionality shall be provided as a recharge option for android OS and iOS. The consumer portal/ app, shall enable consumers to recharge as well as view recharge history, existing balance, daily usage etc.
- f) In addition to billing determinants, the MDM shall share, consumer recharge and credit updates with the utility Billing system. Any re-conciliation shall be carried out in the Billing System and the same shall be shared with the MDM for use by the prepayment application.
- g) The system shall periodically monitor the energy consumption of prepaid consumer and decrease the available credit based on consumption. For this purpose, the MDM shall fetch billing data (kWh/kVAh consumption and MD) at configured intervals³ from the prepaid meter. The raw billing data shall be subjected to standard VEE rules before being used to update recharge balance with the help of applicable tariff slabs. The credit balance is updated into meter at re-charge time.

_

³ The frequency of pre-configured intervals shall be at least every hour in addition to that at re-charge time

- h) The prepayment application shall use determinants such as minimum fixed charges, TOU tariffs, slab rates, duties & surcharge while calculating consumer credit/balance. Fixed charge shall be deducted on daily basis irrespective of the consumption, even after disconnection of supply and adjusted in the next transaction.
- i) The prepayment application should be able to automatically apply different TOU tariffs for future date lines, while calculating consumer credits.
- j) The system should send connect/disconnect command based on available credit as per notified rules & regulations.
- k) The system should send low-credit notifications to the consumer when their balance approaches a pre-configured threshold. Alerts shall initiate on every recharge, low credit and load connection/disconnection. The alerts shall be posted on the consumer web Portal/ App in real time and sent through SMS and email. Consumer should also be alerted through other mechanisms such as one-time alarm / beep from the meter, LED blinking, message, etc.
- It shall be possible to configure an "emergency" credit limit in INR as well as day terms. This emergency credit shall be used as reserved amount that is consumed when consumer credit is exhausted. The credit amount shall be adjusted in next recharge transaction.
- m) It shall be possible to configure certain prepaid consumers where autodisconnections shall not happen due to negative credit. The conditions/protocols for auto-disconnections are detailed in Annexure I.
- n) The pre-payment function shall also have a facility to configure arrear recovery mechanism to recover arrears from a consumer. Some of the indicative mechanism to recover the same can be recovery of [X]% from every recharge amount while the rest goes as charging amount till all the arrears are recovered. Alternately the arrears may be settled in next [X] instalments as decided by utility such that not more than 50% of any instalment shall be adjusted towards arrear.

2.4.7 Net Metering

MDM shall flag, alarm and trigger an estimating process including but not limited to when the following events occur:

- a) CUM decrements of forward energy within a billing cycle
- b) Register decrements for Time of Use (ToU) of forward energy

- c) Power generated(exported) by any net-metering consumer more than the installed capacity of solar PV rooftop system
- d) Energy exported in any given day by any net-metering consumer more than the programmable threshold value

Like billing for post-paid meters, the billing for net-meters shall take place in the utility Billing server.

2.4.8 Exception Management

- a) Ability to capture and log data exceptions, problems and failures and to generate management reports, provide trend analysis, automate generation of service requests and track corrective actions.
- b) Ability to group, prioritize, filter and send system generated alarms and events to predetermined email addresses, cellular text messages to phone numbers/ SMS/ consumer care etc. Alternatively, these alarms/alerts may be routed to utility's WFMS
- c) Exception Generation MDM shall generate exceptions based on configurable business rules including but not limited to the following:
 - i. Meter tamper alerts
 - ii. Communication module health alerts for meter/DCU
 - iii. If the consumption is less/more than pre-defined average consumption
 - iv. Negative Consumption (not for net-metering)
 - v. Power outage indications received from the Smart Meter

2.4.9 Service Orders

- a) The MDM shall generate service orders based on configurable rules for various events and alarms such as stop meter, tampers, problem in communication networks, etc.
- b) MDM shall send service orders via SMS, email, etc. with the email addresses / phone numbers being configurable. MDM shall receive feedback on action taken on the service order and track the status of service orders until resolution.
- c) Service order tickets could be generated by MDM but processed and closed under jurisdiction of the HES-NMS combine. If the utility already has a separate Workforce Management System (WFM), then the service order tickets can be routed from the MDM and the NMS to the WFM for completion of the tasks and reporting.

2.4.10 Revenue Protection Support

- a) Ability to analyze meter tampering flags, power outages, usage trends and usage profiles to identify potential energy diversion situations, and produce daily reports, monthly reports and service order requests for investigation.
- b) The business rules for revenue protection alerts shall be configurable via a user-friendly interface.
- c) The MDM shall filter out revenue protection alerts that may be caused by field activities if the field activity information is provided to the MDM.
- d) The MDM shall support the analytics/investigation (i.e. view current and historical usage patterns) to validate suspected revenue protection issues.

2.5 Utility Interface and Consumer Portal/ App

2.5.1 Utility User Interface

User interface for utility shall have ability for at least the following functionality:

- a) Compare total energy costs on one rate schedule vs. one or many alternative rates.
- b) Enable the user to see how different options within a rate affect costs.
- c) Enable the user to see how adjusting load or consumption levels or shifting them to different time periods influences costs.
- d) Display meter data at a user defined configurable cycle that allows authorized users to view energy usage patterns and the data behind them for selected consumers.
- e) Allow authorized users to view metered data, initiate and view reports, modify configurations, and initiate and update service requests.
- f) Display the energy usage profile for a single meter or group of meters. The load profile shall illustrate energy consumption and peak demand in user defined intervals for a user-specified time period.
- g) Display the energy usage profile for a single meter or group of meters according to Time of Use (ToU) tariff.
- h) The UI shall support a configurable utility dashboard for Operations and Utility Management
- i) Access to a minimum of three (3) years of historical energy usage and meter reads through the UI.
- j) Clearly and visually distinguish between metered, estimated, allocated and substituted data.

- k) User management with roles and access rights
- I) GUI to provide role-based access based on user identity and user role. Shall have following types of users:
 - Administrator
 - ii. Operator
 - iii. Field staff
 - iv. Viewer/Guest
- m) Configure the look, feel, and functionality of the MDM in accordance with business needs, business processes, and business conventions. (E.g. GUI, content, look and feel of screens, validation rules, exception handling, etc.).
- n) Ability to set up alarm and event notifications that can be directed to a combination of configurable email addresses, cellular text messages.
- o) UI shall enable viewing of the credit amount updated in MDM for prepaid consumers.
- p) Option to send marketing messages and notification to select consumers or selected category of consumers
- q) Facility to enable or disable existing functionalities/sections of App/Portal for consumers use.
- r) Consumer views to be available to Utility consumer Service Executive also except payment card/bank information.
- s) Authorised representative to be enabled for consumer engagement analytics. The analytics to be configurable/ generated with minimal database skill and nil programming requirements.
- t) Representative to be able to generate various reports at different intervals the various reports as per Clause 6 of this Section. It shall be also possible to export the report data in multiple formats such as XLS, CSV format, etc.
- u) Provide consumer interactions history to enable efficient consumer complaints and queries resolution with consumer information in single screen.

2.5.2 Consumer Portal/ App

Consumer portal and mobile application shall cover all consumer categories and category specific features as applicable prior to operational Go-Live. These apps shall have provision to enable features required to facilitate consumer participation in Demand Response programs which the utility may choose to roll out in future. The consumer web portal and the mobile application (for smartphone and tablet devices using latest and commonly available browsers and operating systems and platforms) shall provide consumers, ready access to features extended by MDM. The Solution shall integrate via a user-friendly graphical interface. It shall facilitate self service capabilities such as usage management, billing, service requests, participation in energy efficiency programs etc. It shall be noted that the Consumer Portal / App acts as the bridge between the consumers touch point and the existing utility Customer Care and Billing Systems. It does not replace these legacy systems in place. Following features shall be supported by Portal / Mobile app:

- a) The mobile app and web portal shall support all device form factors such as mobile, tablet, desktop etc. by recognising the device details automatically.
- b) It shall be OS agnostic to operating system and devices (iOS, Android, etc.)
- c) It shall work on all standard browsers such as Internet Explorer (IE), Chrome, Safari, Firefox etc.
- d) The application should be modular and scalable a COTS product.
- e) The application should be native for better user experience.
- f) It shall support multiple languages viz Hindi, English and local language(s). Also, notifications should be sent to consumers in local languages.
- g) The user experience of the citizen on the Portal and App shall be similar in terms of look and feel, navigation, menu and access to preferences and other data.
- h) Menu should have navigation options, not limited to, Home, Settings, Recharge, notification preferences, usage rates, change password, terms and conditions, privacy policy, sign out.
- i) It shall have search functionality across all the pages.

Software patches, updates, and version upgrades, when they become available for general release, should be part of ongoing support and maintenance services.

2.5.2.1 Functional Requirements of Consumer Portal/ App

Web portal and Mobile app for consumers should have minimum following functionalities:

a) The consumer portal/app shall have a landing Home page. This page shall provide a brief description about the Utility, any promotional features or advertisement for special programs can be placed in this page. Login Component is provided, and registered users may login using their username and password. New Users can also register by clicking on the First Time Users Register link. The Forgot Password link helps the user to retrieve their password. New users can register by providing their personal information and setting up of security answers. Forgot passwords can be retrieved or reset using OTP through registered mobile number or through email address. The registered users can change their password and account information as well as registered mobile number through OTP feature.

- b) The consumer portal/app shall provide consumers with access to consumer ID, meter ID, meter type and name plate details, besides other account information such as account name, address, balance, due, status etc. Any status message pertaining to the account/s viz. alerts/actions shall be displayed here. It shall also provide current and historical consumption in graphical formats for at least 12 months. A more detailed analysis can be provided in a tabular format listing meter reading date, reading, consumption, charges, selected period etc. Consumers shall be able to view interval data, outage flags, voltage, power quality indications, existing tariffs and incentives for selected period. Information about different consumer engagement programs shall also be displayed here.
- c) The portal/app shall have the ability to provide option for registering in online/paper billing to the consumer. There shall be a bill summary page that shall display bill information in summary and also option for detailed view and download in pdf format if required by consumer. The use shall be able to pay bill for single and multiple accounts.
- d) The portal/app shall be integrated with existing helpdesk of the utility and have the ability to provide option for recording service requests/complaints lodged by the consumer as new connection, disconnection, load change, category change, meter shifting etc. The user can view the service request status. The user can register complaints viz. power failure, faulty meter, streetlight outage etc. There shall be option to track status of service requests.
- e) Mobile App and Web Portal shall facilitate Chat-bot functionality of the utility's Help Desk. The portal/ App shall support configuration of notification types via email/ SMS/ message/ automated call (through utility IVRS), of configured alarms & events.
- f) The information on consumer identification no., meter ID, name plate details, make, type i.e. 1 Phase or 3 Phase, etc. (as per requirement of Utility) shall be updated in HES, MDM, and the consumer portal/app.

- g) The consumer Portal/ App shall have the ability to provide the consumer near real time online views of both usage and cost differentiating high energy usage periods, helping consumers to understand electricity usage and cost information, alerts and notifications and energy savings tips with different levels of detail. The Portal/ App shall support the view for past electricity usage, last week's, yesterday's, current days or other period etc. as per selection as well as voltage and power quality indications. The portal/ app shall provide user friendly access to consumer for their data via graphs and charts and can download the data into a spreadsheet.
- h) The portal/app shall provide option to the consumer to view/download online bill. There shall be a bill summary page that shall display bill information in summary and option for detailed view and download in pdf format. The user shall be able to pay bill for single and multiple accounts.
- i) The portal/app shall also provide platform for implementation of peak load management functionality by providing existing tariff & incentives rates, participation options etc. The portal/app shall also provide consumers with interval data, flags, voltage, power quality indications etc. Show outage information in map view.
- j) There should be different UI and landing pages for different type of consumers as per the need of utility.
- k) User interface to consumer Portal/ App to access consumer's data from MDM for all authorized consumers shall have ability for at least the following functionality:
 - i. View metered data, monthly average usage, current monthly consumption, maximum demand and other reports
 - ii. View data according to Time of Use (ToU), day, week, month, year and season etc.
 - iii. Update profile information such as mobile number/email etc.
 - iv. Guest user account/multi-user account access facility for consumer convenience
 - v. Initiate request for connection/disconnection
 - vi. Initiate request to switch between pre-paid and post-paid mode
 - vii. Initiate service requests for maximum demand updating, meter checking etc.
 - viii. Initiate complaints such as Meter not working, supply off etc.

- ix. In case on net-metering consumers, user can view data for both import & export data
- x. Can view recharge history, present balance, next possible recharge date and amount etc.
- xi. Historical energy consumption and energy charges during the desired time period
- xii. Facility to recharge their account through the payment gateway facilitated by the utility.

2.6 Network Operation & Monitoring Centre

The Network Operations and Monitoring Centre shall cater to the needs of the,

- Project Management Team and the
- AMI network operations team

The Network operation and monitoring centre shall be created in the utility premises by the AMISP, for which suitable built up space shall be provided by the utility. The built-up space to be arranged by the utility, shall be properly air conditioned, illuminated, and adequate for at least five operator workstations and one cabin for a supervisor.

AMISP is required to suggest a suitable architecture for the Network Operation & Monitoring Centre, taking care of the security requirements as described in this document. AMISP shall establish connectivity between the workstations located at the NOMC with that of the cloud-based MDM-HES system. In addition, the AMISP shall establish connectivity between the cloud-based MDM system with utility's existing Billing system. This will necessitate creation of a VPN tunnel between the two unless it is decided to migrate the Billing system to the same cloud data centre. The AMISP must submit the details of the supplied hardware along with the Bid. The AMISP shall assess the adequacy of hardware specified in the List of Material and Services & if any additional hardware or higher end hardware configurations are required to meet all the requirements of the Technical Specifications, the same shall be included in the offer.

2.6.1 General Requirements for NOMC Hardware

All hardware shall be manufactured, fabricated, assembled and finished with workmanship of the highest production quality and shall conform to all applicable quality control standards of the original manufacturer and the AMISP. All hardware components shall be new and suitable for the purposes specified.

All workstations and network equipment (routers, firewall etc.) shall be compatible for remote monitoring using secure Simple Network Management Protocol (SNMP) Ver. 3.0. All hardware shall support IPv6 simultaneously.

The AMISP shall ensure that at the time of final approval of hardware configuration and List of Material and Services, all the hardware is as per the current industry standard models and that the equipment manufacturer has not established a date for termination of its production. Any hardware changes, except version upgrade in same series, proposed after contract agreement shall be subject to the following:

- a) Such changes/updates shall be proposed, and approval obtained from the Utility along with the approval of Drawings/documents.
- b) The proposed equipment shall be equivalent or with better features than the equipment included in the Contract.
- c) Complete justification along with a comparative statement showing the original and the proposed hardware features/parameters including brochures shall be submitted to the Utility for review and approval.
- d) Changes/updates proposed will be at no additional cost to the Utility.
- e) The porting of software shall be at no additional cost in case of replacement of hardware during the contract period.

2.6.2 Minimum Technical Requirements for NOMC Hardware

The network operation and monitoring centre shall be equipped with the following minimum hardware components:

- a) Six numbers 17" Operator workstations including one for Supervisor
- b) A dual redundant 1 Gbps local area network
- c) Internet router with at least 48 no's 1 Gbps LAN ports and redundant at least 2 Gbps internet ports supporting IPsec, and SSLVPN capability
- d) Firewall and intrusion protection system
- e) One video display system of at least 70-inch diagonal with laser light source HD cube (DLP technology) supported by,
 - i. Dual power supply
 - ii. IP based control options and
 - iii. Display Port, DVI, HDMI and Analog D-Sub signal interfaces
- f) One A3/A4 size laser jet B/W printer with LAN interface
- g) One A4 size ink jet colour printer with LAN interface
- h) One dual redundant online UPS to support the load of the above-mentioned equipment with minimum 2 hours backup
- i) 2 Gbps internet connectivity

In addition, the AMISP has to be establish connectivity between the cloud-based MDM system with utility's existing Billing system. This will necessitate creation of a VPN tunnel between the two, unless it is decided to migrate the Billing system to the same cloud data centre.

This section describes the technical requirements of all the hardware envisaged in the AMI system. The AMISP has to submit the details of the supplied hardware along with the Bid. The AMISP shall asses the adequacy of hardware specified in the List of Materials and Services at Form 14 of Section 4 of the RfP & if any additional hardware or higher end hardware configurations are required to meet all the requirements of the Technical Specifications, the same shall be included in the offer.

2.6.3 Technical Requirements for Hardware

All hardware shall be manufactured, fabricated, assembled and finished with workmanship of the highest production quality and shall conform to all applicable quality control standards of the original manufacturer and the AMISP. All hardware components shall be new and suitable for the purposes specified.

All workstations and network equipment (routers, firewall etc.) shall be compatible for remote monitoring using secure Simple Network Management Protocol (SNMP) Ver. 3.0. All hardware shall support IPv6 simultaneously.

The AMISP shall ensure that at the time of final approval of hardware configuration and BOQ, all the hardware is as per the current industry standard models and that the equipment manufacturer has not established a date for termination of its production. Any hardware changes, except version upgrade in same series, proposed after contract agreement shall be subject to the following:

a) Such changes/updates shall be proposed, and approval obtained from Utility along with the approval of Drawings/documents.

- b) The proposed equipment shall be equivalent or with better features than the equipment included in the Contract.
- c) Complete justification along with a comparative statement showing the original and the proposed hardware features/parameters including brochures shall be submitted to the Utility for review and approval.
- d) Changes/updates proposed will be at no additional cost to the Utility.
- e) The porting of software shall be at no additional cost in case of replacement of hardware during the contract period.

The minimum technical specification and requirement to be followed for hardware equipment is as follows:

2.6.3.1 Firewall

Firewalls should be properly configured to segregate networks into different segments. The following strategies shall be followed for secure configuration of firewalls.

- a) Cleanup rule.
- b) Place a "Deny Any-Any" rule at the end of the rule base.
- c) Never create an "Allow any-any" rule.
- d) Allow rules should be created only for required services.
- e) This will result in all traffic being disallowed, unless specifically allowed.
- f) Lockdown/stealth rule
- g) All traffic destined for the firewall itself should be disallowed.
- h) Place anti-spoofing rule as per RFC 2827.
- i) Enable DoS/DDoS features on Firewall
- j) Enable application level filtering of firewall

2.6.3.1.1 Firewall with UTM solution

GENER	RAL REQUIREMENTS
1.	The proposed system must be appliance based and rack mountable.
	All UTM features like Firewall, Anti-Virus, Anti-Spam, Web & Application filtering up to Layer 7, IPS, DNS Security, SSL Decryption Technology, Wildfire & Sandbox Technology, DOS Protection with Protect interface & Zone Label, Data Filtering and File Blocking should be available for UTM requirement.
3.	Licensing should be per device and not user/IP based.
4.	The proposed solution should support Load Balancing and Failover among more than 2 ISP Links (with USB port 3G/4G and Wimax Support).
5.	The proposed solution should support integration with Windows NTLM, Active Directory, LDAP, Radius, RSA SecurID, Novell e-Directory or Local Database for user authentication and Guest User authentication via SMS
6.	The proposed solution must be able to be capable of deploying in Route (Layer 3) and Transparent mode (Layer 2), individually and simultaneously.
7.	The proposed solution should support dynamic routing like RIP1, RIP2, OSPF, BGP4.
8.	The proposed solution must support Automatic Transparent Single Sign On for user authentication
9.	The proposed solution should support DNS, DDNS, NTP, SNMP, DHCP (Server/Relay), VLANs etc.

- 10. The proposed solution should support user, IP and mac binding that can map username with corresponding IP and MAC addresses for security reason.
- 11. The proposed solution must support User based policy configuration for security and Internet management.
- 12. The proposed solution should support High Availability Active/Passive and Active/Active

HARDWARE REQUIREMENTS

- 1 The proposed solution must be based on ASIC or Multicore Parallel Processing Architecture
- Proposed solution should support inbuilt HDD 250GB for storage or external device for Logs and Reports to meet the UTM Features.
- The proposed solution should have minimum 8 x Copper GbE ports & Expandable to 24 x Copper GbE ports for Future Expansion & Segregation of Zones.
- 4 There should be provision to Load Fibre modules (1G & 10G) for future Enhancements
- 5 The proposed solution should have minimum 2 USB ports.

PERMORMANCE REQUIREMENTS

- The Proposed Solution should meet the following performance criteria & should mandatorily produce valid references for the same at the time of bidding:
 - a. Firewall Throughput of 20,000 Mbps or Above
 - b. Concurrent sessions: 3,200,000 or Above
 - c. New sessions/second: 1,00,000 or Above
 - d. IPSec VPN throughput: 1,300 Mbps or Above
 - e. SSL VPN throughput: 500 Mbps or Above
 - f. Antivirus throughput: 2,900 Mbps or Above
 - g. IPS throughput: 4,000 Mbps or Above
 - h. UTM Throughput (Firewall, IPS, Web & App. Filtering and Anti-Virus): 1,700 Mbps or Above

UTM FEATURES REQUIREMENTS

- The proposed solution should facilitate the application of UTM policies like AV/AS, IPS, Content filtering, Bandwidth policy and policy-based routing decision on the firewall rule itself. Also, UTM controls should be able to be applied on inter zone traffic.
- The proposed system must provide Mac Address (Physical Address) based firewall rule configuration to provide OSI Layer 2 to Layer 7 security
 - 3. The proposed solution must support Application/Web Category-based Bandwidth Management which allows administrator to create application/web category-based bandwidth policies.
- 4. The proposed solution should have minimum 4000 signatures in its database & provision for Custom IPS
- 5. The proposed solution should support Anti-Virus scanning for SMTP, SMTPS, POP3, IMAP, FTP, HTTP, HTTPS, FTP over HTTP protocols.
- 6. For POP3 and IMAP traffic, the proposed solution should strip the virus infected attachment and then notify the recipient and administrator.
- 7. The proposed solution should support spam scanning for SMTP, SMTPS, POP3, IMAP.
- 8. The proposed solution must support on-appliance quarantine facility and also a personalized user-based quarantine area which allows you to release legitimate emails.
- 9. The proposed solution should support real time spam detection and proactive virus detection technology which detects and blocks new outbreaks immediately and accurately.
- 10. The proposed solution should have specific Web categories that broadly classify websites. For instance, websites that reduce employee productivity, bandwidth choking sites or malicious websites.
- 11. The proposed solution should support creation of cyclic policies on Daily/Weekly/Monthly/Yearly basis for Internet access on individual users/group of users.
- 12. The proposed solution should provide option to define different bandwidth for different schedule in a single policy and bandwidth should change as per schedule on the fly.

13. The proposed solution must be capable of identifying hidden applications running over standard ports (80. 443, 22 etc.) 14. The proposed solution must be capable of blocking the following type of applications: P2P, VOIP, Games, Remote: Control, Chats etc VPN REQUIREMENTS The proposed solution should support IPSec, L2TP, PPTP and SSL VPN connection. The proposed solution should support DES, 3DES, AES, Twofish, Blowfish, Serpent encryption 2 algorithms. The proposed solution must support automatic failover of Point to Point link (MPLS) with VPN for 3 redundancy purpose. The proposed solution must support Apple iOS and Android VPN clients 4 **LOGGING & REPORTING REQUIREMENTS** The proposed solution should have On-Appliance, integrated reporting solution or External Device 2 The proposed solution should allow exporting of reports in PDF and Excel format. 3 The proposed solution should support logging of Antivirus, Antispam, Content Filtering, Traffic discovery, IPS, Firewall activity on syslog server. 4 The proposed solution should provide connection-wise reports for user, source IP, destination IP, source port, destination port or protocol. 5 The proposed solution should provide compliance reports for SOX, HIPPA, PCI, FISMA and GLBA compliance. 6 The proposed solution should support multiple syslog servers for remote logging. 7 The proposed solution should have customizable email alerts/automated Report scheduling. WARRANTY, SUPPORT & CERTIFICATION REQUIREMENTS Warranty & UTM Features Subscription: 36 months 2 OEM Web/Phone/Chat Support: 24x7 (36 Months) The Proposed Solution should meet the following Certification Criteria: a. Common Criteria - EAL4+ b. "IPv6 Ready" Gold Logo c. ICSA Firewall or Equivalent

2.6.3.2 Router

Necessary control should be applied on router to stop unwanted traffic and attacks at the perimeter itself. In the secure configuration of a router, the following strategies should be considered.

- a. Deploy proper access management and avoid remote administration.
- b. Enable password.
- c. Change default SNMP community string.
- d. ACLs (Access Control Lists) should include
 - i. Apply egress/ingress filter
 - ii. Filter all RFC 1918, 3330 address space and special/reserved address
 - iii. Permit the required services for the required IP addresses only
 - iv. Deny everything else.
- e. Turn on logging to a central syslog server.

2.6.3.3 Other Hardware Configurations

A. Desktop

S.No.	Description	Minimum Specification
1.	Form Factor (Computer Type)	Desktop Mini/Micro (Provision to mount the CPU behind it)
2.	Processor & Chipset	10 th Generation Minimum Core i7-8700T (Min 2.4 GHz with Turbo up to 4 Ghz, 12 MB Cache, 6 cores, 12 threads) or higher Q370 Chipset or higher
3.	Monitor	19.5" or higher IPS Panel LED backlit with TCO 7.0 and 1440 x 900 Resolution
4.	Memory	32 GB of ECC DDR4 Memory and scalable up to 512 GB memory (Memory slots free for expansion)
5.	RAM	4 GB delivered, expandable upto 8GB
6.	Display	Minimum 2 Nos. * 17" (1280x1024), Antiglare LED Monitor. Should have display port and VGA connector. Provision to mount the CPU behind it. Both monitors to be connected to CPU with proper connector/video cables
7.	Mounting	Desktop mounting
8.	Operating System	Windows 10 Professional (64 bit) with latest Service Packs pre-installed
9.	Operating System (OS) support	Windows 10; 64 bit (Original OS CDs and license keys to be provided)
10.	Processor speed	3.0 GHZ each processor
11.	Internal Auxiliary memory	500GB delivered, expandable upto 1TB
12.	Speakers	Two internal speakers
13.	Interfaces	 1 GB dual Ethernet ports Min 4 USB Ports, of which atleast 2 USB Ports in Front Front I/O: (2) USB 3.1 Gen1 Ports, Universal Audio jack Port for cartridge magnetic tape drive Graphic adapter cards (HDMI) Rear I/O: (4) USB 2.0 ports, (2) USB 3.1 Gen 1 Ports, (1) VGA video port; (1) DisplayPort Port, (1) RJ-45 network connector, (1) RS-232 serial port, (2) PS/2 Ports, 3.5mm audio in/out jacks
14.	User interface	Three/Two (as per List of Materials and Services at Form 14 of Section 4 of the RfP) 24" wide screen (16:9 aspect ratio), HD Resolution (1920x1080) TFT Colour monitors, keyboard & optical mouse
15.	Graphics	Integrated Intel® HD Graphics 630 or higher
16.	Audio	High Definition Integrated Audio with Internal Speaker
17.	Drives	1TB 2.5" SATA III 6.0Gbps HDD @ 7200 rpm, Partitioned into 2 drives.
18.	Ethernet	Integrated Gigabit (10/100/1000 NIC) LAN
19.	Connectivity	Integrated Gigabit LAN Network Connection 10/100/1000 Mbps NIC with RJ45/UTP Interface.
20.	Keyboard	USB 104 keys or higher OEM make.
21.	Mouse	2 Button USB Optical scroll mouse, OEM make
22.	Chassis Volume	Max. 1.2 litre (without Mounting Kit). CPU must be mounted behind the monitor.
23.	Power Supply	Minimum 65W or above External Indian Power Adapter for CPU with average efficiency of 87% or more
24.	Security Features	TPM 2.0, Setup/BIOS Password, Slot for locking CPU using lock and key. (Lock with 2 / 3 keys should be provided)

Warranty

Compliance

Certification

Information Accessibility

Support

28.

29.

30.

31.

S.No. Description Minimum Specification

25. Software (loaded in Desktop)

26. Diagnostics Tool Inbuilt Pre-Boot BIOS Diagnostics

27. Security TPM 1.2 Security Chip, SATA port disablement (via BIOS), Serial, USB enable/disable

padlocks and cable lock devices

14001, 27001, Certified OEM

date of purchase order

5 years Comprehensive onsite warranty

(via BIOS), Removable media write/boot control, Power-On password (via BIOS), Administrator password (via BIOS), Setup password (via BIOS), Support for chassis

Energy Star ver 6.1. EPEAT Certified for India for guoted desktop & Monitor, TCO

Certified for both Desktop & Monitor, FCC, CE, RoHS certified, UL Certified ISO 9001,

Drivers should be available for download from OEM site for at least 5 years from the

Product details, specifications, and brochure to be available in public domain

B. Workstations with Monitors

Workstation for development system shall consist of dual monitors & single keyboard and a cursor positioning device/ mouse. The user shall be able to switch the keyboard and cursor-positioning device as a unit between both monitors of console. Workstation consoles shall also be used as development console to take up developmental/ maintenance activities such as generation/ updation of database, displays etc. and to impart

Minimum hardware configuration of operator workstation and Display monitors are as follows:

S.No.	Item	Description	
A. Opera	A. Operator Workstation		
1.	Spec	As per the base runtime requirements of SPEC CPU 2017 V1.0 Benchmarking Standards.	
2.	RAM	8 Gb expandable upto 16 GB	
3.	Processor Speed	3.0 GHz	
4.	Internal Auxiliary Memory	2x500 GB RAID, expandable upto 1 TB	
5.	Speakers	2 internal speakers	
6.	Interface	1GB dual Ethernet Ports Min 4 USB Ports Port for Cartridge magnetic type drive Graphic adapter cards (HDMI)	
7.	User Interfaces	24" wide screen (16:9 aspect ratio) as per List of Materials and Services at Form 14 of Section 4 of the RfP HD resolution (1920x1080), TFT Colour Monitors, keyboard and optical mouse	
8.	Mounting	Desktop Mounting	
9.	Power Supply	Dual AC Power Supply	
10.	Operating System	Microsoft Windows 8.1 or Latest Professional (compatible with the OEM Software)	
B. Monite	ors		
1.	Diagonal Viewable Size	Yes	

2.	Colour Support	16.7 million
3.	On Screen Control	Required
4.	Anti-Glare and Anti- Static	Yes
5.	Tilt, Swivel	Yes
6.	Aspect Ration	16:9

C. <u>UPS - 2kVA Line Interactive INTELLIGENT UPS for Desktop PC</u>

S.No.	Description	Minimum Requirements
1.	Capacity	2 kVA Line Interactive
2.	Back up Time	10 Minutes on 450 VA Continuous Load; Overload capacity: 125% of required capacity for at least 1 Minute
3.	Input Voltage	230 V AC, Single Phase 3 wire
4.	Input Voltage Range	160 V AC to 270 V AC
5.	Input Frequency Range	45 to 55 Hz
6.	Input Over Voltage	280 V AC
7.	Input Under Voltage	155 V AC
8.	Over Voltage Cut-Off	Should be offered externally
9.	Output Voltage	230 + 5% (On Battery) Automatic Voltage Regulation
10.	Output Over Voltage	245 V AC Single Phase
11.	Output Under Voltage Protection	210 V AC Single Phase
12.	Load Power Factor	0.8 Lag to Unity
13.	Short Circuit Protection	Soft shut down should occur without blowing any fuse.
14.	General Features	Automatic Voltage Regulation, Lightning & Surge Protection
		Output Wave form — Modified Sine wave
		Audio Alarms: Low Battery; Battery ON; Overload Protection: Overload, Short circuit, spike & surge
15.	Switching Time	Less than 5 MS without data loss
16.	Operating Temp.	Up to 40 Deg. C.
17.	Operating Humidity	Up to 90%, Non-condensing
18.	Battery Type	SMF-Hitachi/ Exide/ Global Yuasa/ Panasonic make or equivalent
19.	Make	APC, Liebert, TVSE, Powerware (Invensys), Guard/NEXUS, Wep, HCL or equivalent.
20.	Others	Output Sockets - Min 3 Nos., each 6 Amp- 3 Pin with all Sockets wired for UPS output Socket of UPS must be compatible with PC and Printer.
		UPS input power plug should be of Indian standard.
		Software: Required for health monitoring of battery & Power mgmt. system RS232-C Serial port or USB port with interface cable, Min 3 Ft Long.

D. A4 B/W Network Laser Printer

S.No.	Description	Minimum Specification
1.	Make & Model	To be Specified
2.	Туре	Dry Type Laser Electro Photography
3.	Function	Print, Copy, Scan

S.No.	Description	Minimum Specification
4.	Resolution Colour	1200 x 1200 dpi
5.	Speed (colour)	32 PPM or higher for A4 in normal mode, first page out 8
6.	Memory	256 MB or Higher
7.	Processor	466 MHz or better
8.	Paper Size	A4 and Legal including Envelops & letter
9.	Type of Media	Bond Paper, Transparency Sheets, Envelopes, Labels, Cards
10.	Paper Handling	250 Sheet Input Tray, 50 Sheet Bypass Tray. 150 Sheet output Tray
11.	Std Paper Trays Input	Two trays (Total paper Input capacity 300 Sheets or more
12.	Printing Languages	PCL 6, PCl 5, postscript 3 emulation
13.	Interface	Hi-Speed USB 2.0
14.	Duplex printing Capability	Automatic Duplex
15.	Duty Cycle	50,000 Pages per month or higher
16.	Connectivity	Hi Speed USB, 2.0, Gigabit 10/100/1000
17.	N/W Print Mgmt S/W	Needed. Built-in wireless networking. Fast Ethernet network port
18.	Power Requirement	Less than 750 Watts
19.	Сору	Copy Speed: Black (A4): Up to 20 cpm 1200 x 2400 dpi; Originals content settings; Text, Text/Photo, Photo, Map; Reduce/Enlarge scaling: 25 to 400%; Copy quantity settings: 1 to 999; Darkness controls: Scan 600 First Copy Time: 9.0 sec Maximum Number of Copies: 999 Copy Features: Memory Sort, 2 on 1, 4 on 1, ID card Copy
20.	OS Support	Vendor to provide drivers for supporting all the required OS
21.	Scanner Specification	Flatbed scanner handles up to 8.5 x 14 in (216 x 356 mm) paper Scan File Format: PDF, Single-Page-TIFF, JPEG, Multi-Page- TIFF, Single-Page-PDF, TIFF Scanner Resolution: 1200 x 2400 dpi Scanning Depth (Input/Output) Color: 48 Bit / 24 bit Greyscale: 16 Bit/ 8 bit

E. A4 Size Inkjet/ Bubble Jet Printer

S.No	Description	Minimum Specification
1.	Printer Type	Inkjet/ bubble jet;
2.	Functionality	Print, Scan, Copy; Printer Output - Color
3.	Connectivity	Wi-Fi and USB
4.	Compatibility	Windows 10, Windows 8, Windows 7 SP1, Windows Vista SP2,Mac OS X v10.8.5
		and later
5.	Power requirements:	AC 100 - 240 V, 50/60 Hz
6.	Power consumption	Manual-off: 0.2 W; Standby : 1.6 W
7.	USB support	USB 2.0
8.	Pages per minute	4 pages (Color),8 pages (Black)
9.	Page size supported	A4, A5, B5, Letter, Legal, 4 x 6", 5 x 7", Envelopes (DL, COM10), Square (5 x 5"),
	- ,,	Custom size (width 101.6 - 215.9mm, length 127 - 676mm); Duplex Print - Manual
10.	Print resolution	4800 × 600 dpi

S.No	Description	Minimum Specification
11.	Scan resolution	600 x 1200dpi

F. A3 Size Inkjet Color Printer / All-in-one Color laser jet Printer

S.No.	Description	Minimum Specification	
1	Make & Model	To be Specified	
2	Power Requirements	220 to 240 VAC (+/- 10%), 50 Hz (+/- 2 Hz)	
3	Copier		
	Paper Size	A3	
	Resolution	Up to 600 x 600 dpi	
	Copy Speed (A3 Colour &	Upto 15 ipm Mono, 11ipm Color	
	Copier Resize	Reduce or Increase document sizes from 25% to 400% in 1%	
4	Printer		
	Print Speed (Colour & B/W)	22 ipm mono & 20 ipm color	
	Paper Size	A4, LTR, EXE, A3, LGR, LGL, A5, A6, Photo (10x15cm), Indexcard (13x20cm), Photo-L (9x13cm), Photo-2L (13x18cm), Com-10, DL	
	Paper Capacity	Standard Tray - 250 Sheets Lower Trays - 250 Sheets	
		Multi Purpose Tray - 100 Sheets	
		Automatic Document Feeder (ADF) - 50 Sheets	
	Memory	512MB	
	Resolm ution	Upto 4800 x 1200dpi	
	Interface	Hi-Speed USB 2.0; Print wirelessly without having to use a wireless access point (both automatic and manual methods supported)	
	Supported OS	Windows 7/Mac OS	
5	Flatbed Scanner		
	Scan Type	A3 Flatbed Scanner with ADF	
	Scan Technology	CMOS CIS	
	Scan Speed	A4 portrait: 18 ipm / 18 ipm	
		A4 landscape: 11 ipm / 11 ipm	
	Dunlay Coopping	A3: 8 ipm / 8 ipm	
	Duplex Scanning Duplex Scan Speed	Required 40 IPM or better	
	Scan Resolution		
		Minimum 600*600 dpi in ADF, 1200*1200 dpi or better in Flatbed	
	Daily Duty Cycle (ADF) Memory	1500 pages or more 512 MB	
	Processor Speed	120MHz or higher	
	Scanning Options (ADF)	Single Pass Duplex	
	Bit Depth	Grey Scale8 bit (256 shades)	
	Ви ворит	Colour24 bit (16,777,216 colors)	
	Supported Paper Weight	60 to 105 GSM or better	
	Connectivity	USB 2.0	
6	Fax		
	Fax Speed	33.6 kbps (3 sec per page)	
	Faxing	Yes	
	Auto Redialing	Yes	

2.7 System Software Requirements

This section describes the standards and characteristics of system software such as operating system, database and support software (compilers, DBMS, display development, network utilities, report generation, diagnostics and backup utilities) provided by AMISP and the original software manufacturer as necessary to support the functioning of AMI Applications systems. All the system software to be used for the present scope of work shall have valid license(s).

2.7.1 Software Standards

All software provided by the AMISP under this RFP, including the operating system, database and support software, shall comply with the industry-accepted software standards. In areas where these organizations have not yet set standards, the software shall comply with those widely accepted de-facto open standards put forth by industry consortiums, such as Open Software Foundation (OSF) and X/Open. The AMISP shall commit to meet the "open systems" objective promoted by industry standards groups.

2.7.1.1 Design and Coding Standards for AMI Applications and Utilities

These provisions are applicable for both software applications and operating systems and would address program features that must be contained in software for the product to meet the standards.

- a) When software is designed to run on a system that has a keyboard, product functions shall be executable from a keyboard where the function itself or the result of performing a function can be distinguished textually.
- b) A well-defined on-screen indication of the present focus shall be provided that moves among interactive interface elements as the input focus changes.
- c) Applications shall not override user selected contrast and colour selections and other individual display attributes.

When animation is displayed, the information shall be displayable in at least one non-animated presentation mode at the option of the user.

2.7.1.2 Applications

All components of AMI application system shall be maintainable by owner using the supplied software utilities and documentation. The software design and coding standards of the system shall address the followings:

a) Expansion: Software shall be dimensioned to accommodate the size of AMI application system as given in List of Material and Services (as mentioned in this RFP) and Annexure E. b) Modularity: Software shall be modular i.e. functionally partitioned into discrete, scalable, reusable modules consisting of isolated self-contained functional elements and designed for ease of change. The system shall make maximum use of common industry standards for interfaces.

- c) **User-Directed Termination**: Functions taking long execution times shall recognize and process user requests to abort the processing.
- d) **Portability & Interoperability**: The system shall be designed for hardware independence and operation in a network environment that facilitates interoperability and integration of third-party applications. AMI applications should support multiple Relational Database Management Systems (RDBMS) including Oracle, Microsoft SQL Server and MySQL.
- e) **Programming Languages**: The software shall be written using high level ISO or ANSI standard programming languages.

All applications shall be designed with sufficient background logs which capture various level of errors encountered (warning, fatal, informational) while executing, so that the same can be reviewed and attended to.

2.7.1.3 Operating System

The operating system of all the equipment of AMI application system including network equipment shall be latest version released up to six months prior to FAT. The operating system shall be hardened to provide robust security. The operating system and data file shall be placed in different disk partitions.

In order to facilitate cyber security requirements including patch management, common operating system is preferable to be used by all server nodes within the AMI application including MDM/HES servers. This is also to minimize the maintenance. All licenses for Operating System and other application software shall be supplied by the AMISP and shall be valid throughout the contract period.

2.7.1.4 Time and Calendar Feature

The AMI application & other servers shall maintain time and calendar for use by various software applications. The internal clocks of all servers and workstation consoles shall be automatically synchronized on Network Time Protocol (NTP) protocol. The calendar shall be customizable for working hours, holidays, weekends etc. The holidays, including type of days, shall be entered for each year at the beginning of the year and shall be recognized by all applications.

2.7.1.5 Remote Diagnostic

Remote Diagnostic facility with necessary hardware as required shall be provided for communication between the AMI application system at the cloud data centre and the NOMC for the diagnosis of hardware & software problems. The login shall be protected by a username & password entry. An automatic logging and intimation shall be provided to inform authorized person from AMISP/utility on such events of remote access and diagnosis.

2.7.1.6 Development System as a Test Bench

A Development system independent of the production environment shall be defined at the cloud data centre which shall provide testing facility for integration of changes/modifications of the AMI application and new field devices before putting it online with Real-time system. This Development system shall be on a VLAN separated from the production VLAN and shall be self-sufficient to carryout testing of changes/ modifications.

2.7.2 Network Communication

The network communications software shall use a standard network protocol such as TCP/IP, UDP etc. and shall support IPv6. The software shall link dissimilar hardware nodes such as local and remote workstations and peripheral devices into a common data communication network allowing communications among these devices. The network communication software, shall include–network security, security management, patch management and network services of the AMI system. Network communication software shall have scalability feature as envisaged.

2.7.3 Cloud Service Providers (CSP)

This section mentions key requirements from the Cloud Service Provider (CSP). AMISP shall be responsible to provide the services of CSP.

2.7.3.1 General Conditions

The cloud data centre shall have to comply with requirements of tier III category which applies to a concurrently maintainable site infrastructure with redundant capacity components and multiple independent distribution paths serving the critical environment. All IT equipment shall be dual powered. The following general conditions will apply:

- a) Only GI (MeghRaj) cloud services or Meity empanelled Cloud services should be used.
- b) One of the most critical issues in the Cloud Service implementation is the security of the data. It is the responsibility of the AMISP to define the security services that need to be implemented for their workloads depending on the nature of the applications / data hosted on the cloud.

c) AMISP need to ensure that the CSPs facilities/services are compliant to various security standards (as mentioned in Clause 2.7.3.4 of this Section) and should be verified by third party auditors.

- d) CSP should suitably address all the potential risks and issues in cloud implementation including data security and privacy, increased complexity in integration with existing environments, vendor lock-in, application portability between different platforms, exit management / Transition-Out Services etc.
- e) The AMISP shall be responsible for providing the cloud data centre services. It shall be up to the AMISP, to identify the critical service agreements with the concerned cloud data centre provider in order that the AMISP can meet and sustain the SLA for the AMI project as per Clause 7.7 of this Section.
- f) All Services including data should be hosed in India
- g) Exit Management / Transition-Out Services -The responsibilities of the CSP during the Exit Management Period need to be agreed upon with the Utility and they should assist the Utility in migrating the data etc.
- h) The responsibilities of CSP include migration of the data, content and any other assets to the new environment or on alternate cloud service provider's offerings and ensuring successful deployment and running of the Utility's Solution on the new infrastructure
- i) The ownership of the data generated upon usage of the system, at any point of time during the contract or expiry or termination of the contract, shall rest absolutely with the Utility.

The AMISP may also choose to procure the following Managed Services (O&M – Cloud Services) from a Managed Service Provider (MSP) in addition to the cloud services to handhold the department in managing the operations on the cloud. The scope of MSP may include:

- a) Migration of Existing Applications to Cloud / Deploying of new applications;
- b) Operations & Maintenance Services on Cloud (e.g., Resource Management, User Administration, Security Administration & Monitoring of Security Incidents, Monitoring Performance & Service Levels, Backup, Usage Reporting and Billing Management)
- c) Exit Management & Transition-out Services, etc.

2.7.3.2 MeitY's Guidelines

While the security, storage, data and compliance tools are provided by the CSP, it is the AMISP's responsibility to ensure that the CSPs facilities/services are certified to be compliant to standards.

In the MeitY's guidelines to Government Departments on Adoption / Procurement of Cloud Services, the following are included as essential certification by CSP. AMISP also needs to ensure that the CSPs facilities/services are certified to be compliant to the following standards (indicative list provided below):

- a) ISO 27001 Data Center and the cloud services should be certified for the latest version of the standards towards information security management system
- b) ISO/IEC 27017:2015-Code of practice for information security controls based on ISO/IEC 27002 for cloud services and Information technology
- c) ISO 27018 Code of practice for protection of personally identifiable information (PII) in public clouds.
- d) ISO 20000-1 Information Technology service management system requirements
- e) TIA 942 A/B &/or Uptime Tier III or higher Telecommunication infrastructure standard for Data Centre
- f) Payment Card Industry (PCI) DSS compliant technology infrastructure for storing, processing, and transmitting credit card information in the cloud

2.7.3.3 Functional Requirements of the CSP

2.7.3.3.1 Operational Management

- a) CSP should provide access of cloud virtual machines either by SSH in case of Linux and RDP in case of Windows servers.
- b) CSP should enable Utility to get console access of cloud virtual machine from portal and perform operations. There should be facility to view resource type-wise (VM, database, storage etc.) quota usage. It should be possible to configure automated alerts when the threshold of estimated quota is reached
- c) CSP should upgrade its hardware time to time to recent configuration to delivery expected performance for this Project.
- d) Investigate outages, perform appropriate corrective action to restore the hardware, operating system, and related tools.

e) CSP should manage their cloud infrastructure as per standard ITIL framework in order to delivery right services to Project.

- f) The CSP should allow different users with different level of access on CSP portal. For example, billing user should not be able to provision resources or delete any resources
- a) The CSP should allow quota management for each department/ISV/Group. The resources to specific department/group/ISV should be as per allocated quota only. If there is any request for more than quota request, then it should be sent as request to admin.

2.7.3.3.2 Compatibility Requirements

- a) CSP must ensure that the Virtual Machine (VM) format is compatible with other cloud provider.
- b) CSP should give provision to import cloud VM template from other cloud providers.
- c) CSP should ensure connectivity to and from cloud resources used for this project is allowed to/ from other cloud service providers if required.

2.7.3.3.3 Cloud Network Requirement

- a) CSP must ensure that the non-production and the production environments are in separate VLANs in the cloud so that users of the two environments are separated.
- b) CSP must ensure that cloud VM are having private IP network assigned.
- c) CSP must ensure that all the cloud VMs are in same network segment (VLAN) even if they are spread across multi data centres of CSP.
- d) CSP should ensure that cloud VMs are having Internet and Service Network (internal) vNIC cards.
- e) CSP should ensure that Internet vNIC card is having minimum 1
 Gbps network connectivity and service NIC card is on 10 Gbps for
 better internal communication.
- f) In case of scalability like horizontal scalability, the CSP should ensure that additional require network is provisioned automatically of same network segment.

- g) CSP must ensure that public IP address of cloud VMs remains same even if cloud VM gets migrated to another data centre due to any incident.
- h) CSP must ensure that public IP address of cloud VMs remains same even if cloud VM network is being served from multiple CSP data centres.
- i) CSP must ensure that the public network provisioned for cloud VMs is redundant at every point.
- j) CSP must ensure that cloud VMs are accessible from Utility private network if private links P2P/MPLS is used by Utility
- k) CSP must ensure that there is access to cloud VMs if Utility requires to access it using IPSEC/SSL or any other type of VPN.
- I) CSP should ensure that cloud VM network is IPV6 compatible.
- m) CSP should ensure use of appropriate load balancers for network request distribution across multiple cloud VMs.

2.7.3.3.4 Cloud data centre specifications

- a) All the physical servers, storage and other IT hardware from where cloud resources are provisioned for this project must be within Indian data centres only.
- b) Selection of DC-DR site architecture shall be in accordance with applicable laws including but not limited to the "Disaster Recovery Best Practices" guidelines issued by the Ministry of Electronics & Information Technology (MEITy) and as amended from time to time".
- c) The CSP data centres should have adequate physical security in place.
- d) The Data Centre should conform to at least Tier III standard (preferably certified Uptime Institute certifications by a 3rd party) and implement tool-based processes based on ITIL standards.

2.7.3.3.5 Cloud Storage Service Requirements

- a) CSP should provide scalable, dynamic and redundant storage.
- b) CSP should offer provision from self-provisioning portal to add more storage as and when require by respective Utilities.

c) CSP should clearly differentiate its storage offering based on IOPS. There should be standards IOPS offering per GB and high-

performance disk offering for OLTP kind of workload.

d) CSP should have block disk offering as well as file/object disk offering to address different kind of Project needs.

e) The CSP should retain AMI data for 5 years

2.7.3.3.6 Cloud Security Requirements

- a) CSP should ensure there is multi-tenant environment and cloud virtual resources of this project are logically separated from others.
- b) CSP should ensure that any OS provisioned as part of cloud virtual machine should be patched with latest security patch.
- c) In case, the CSP provides some of the System Software as a Service for the project, CSP is responsible for securing, monitoring, and maintaining the System and any supporting software.
- d) CSP should implement industry standard storage strategies and controls for securing data in the Storage Area Network so that clients are restricted to their allocated storage
- e) CSP should deploy public facing services in a zone (DMZ) different from the application services. The Database nodes (RDBMS) should be in a separate zone with higher security layer.
- f) CSP should give ability to create non-production environments and segregate (in a different VLAN) non-production environments from the production environment such that the users of the environments are in separate networks.
- g) CSP should have built-in user-level controls and administrator logs for transparency and audit control.
- h) CSP cloud platform should be protected by fully managed Intrusion detection system using signature, protocol, and anomalybased inspection thus providing network intrusion detection monitoring.

2.7.3.3.7 Data Management

 a) CSP should clearly define policies to handle data in transit and at rest.

b) CSP should not delete any data at the end of agreement without consent from Utility.

c) In case of scalability like horizontal scalability, the CSP should ensure that additional generated data is modify/deleted with proper consent from Utility.

2.7.3.3.8 Managed Services

- a) Network and Security Management:
 - i. Monitoring & management of network link proposed as part of this Solution. Bandwidth utilization, latency, packet loss etc.
 - ii. Call logging and co-ordination with vendors for restoration of links, if need arises.
 - iii. Addressing the ongoing needs of security management including, but not limited to, monitoring of various devices / tools such as firewall, intrusion protection, content filtering and blocking, virus protection, and vulnerability protection through implementation of proper patches and rules.
 - iv. Ensuring that patches / workarounds for identified vulnerabilities are patched / blocked immediately
 - v. Ensure a well-designed access management process, ensuring security of physical and digital assets, data and network security, backup and recovery etc.
 - vi. Adding/ Changing network address translation rules of existing security policies on the firewall
 - vii. Diagnosis and resolving problems related to firewall, IDS/IPS.
 - viii. Managing configuration and security of Demilitarized Zone (DMZ) Alert / advise Utility(s) about any possible attack / hacking of services, unauthorized access / attempt by internal or external persons etc.
- b) Server Administration and Management:
 - Administrative support for user registration, User ID creation, maintaining user profiles, granting user access, authorization, user password support, and administrative support for print, file, and directory services.
 - ii. Installation/ re-installation of the server operating systems and operating system utilities

- iii. OS Administration including troubleshooting, hardening, patch/ upgrades deployment, BIOS & firmware upgrade as and when required/ necessary for Windows, Linux or any other O.S proposed as part of this solution whether mentioned in the RFP or any new deployment in future.
- iv. Ensure proper configuration of server parameters, operating systems administration, hardening and tuning
- v. Regular backup of servers as per the backup & restoration
- vi. Managing uptime of servers as per SLAs.
- vii. Preparation/ update of the new and existing Standard Operating Procedure (SOP) documents on servers & applications deployment and hardening.

2.7.3.3.9 Business Continuity Plan & Backup Services

As part of a business continuity plan, the Utility has made a business impact analysis in the event of loss of AMI applications running in the cloud and consequent loss of data to come up with a management plan for the associated risk to business operations. Central to this risk management strategy, the Utility has defined the following target objectives:

- a) Recovery Time Objective (RTO): Duration of time and a service level within which a business process must be restored after a disruption in order to avoid unacceptable consequences associated with a break in continuity of service. The RTO of 4 hours shall be met by infrastructure redundancy and failover.
- b) Recovery Point Objective (RPO): Interval of time that may pass during a disruption before the quantity of lost data during that period exceeds the business continuity plan's maximum allowable threshold. The RPO of 2 hours shall be met by a suitable backup and replication strategy of operational data / application. The RPO shall define how fast the replicated data / application can be made available to the target system after a disruption strikes.

With these two objectives, the CSP shall provide the following:

- a) CSP must provide backup of cloud resources. The backup tool should be accessible
- b) To perform backup and restore management as per policy & procedures for backup and restore, including performance of daily, weekly, monthly, quarterly and annual backup functions

(full volume and incremental) for data and software maintained on the servers and storage systems using Enterprise Backup Solution.

- c) Backup and restoration of Operating System, application, databases and file system etc. in accordance with defined process / procedure / policy. Monitoring and enhancement of the performance of scheduled backups, schedule regular testing of backups and ensure adherence to related retention policies
- d) Ensuring prompt execution of on-demand backups & restoration of volumes, files and database applications whenever required.
- e) Real-time monitoring, log maintenance and reporting of backup status on a regular basis. Prompt problem resolution in case of failures in the backup processes.
- f) Media management including, but not limited to, tagging, cross-referencing, storing (both on-site and off-site), logging, testing, and vaulting in fireproof cabinets if applicable.
- g) Generating and sharing backup reports periodically
- h) Coordinating to retrieve off-site media in the event of any disaster recovery
- i) Periodic Restoration Testing of the Backup
- i) Maintenance log of backup/ restoration
- k) CSP should provide network information of cloud virtual resources.
- CSP must offer provision to monitor network uptime of each cloud VM.

2.7.3.3.10 Web Application Firewall (WAF) as Service

- a) Cloud platform should provide Web Application Filter for OWASP Top 10 protection
- b) CSP WAF should be able to support multiple website security.
- c) CSP WAF should be able to perform packet inspection on every request covering the 7th layers.
- d) CSP WAF should be able to block invalidated requests.

- e) CSP WAF should be able to block attacks before it is posted to website.
- f) CSP WAF should have manual control over IP/Subnet. i.e., Allow or Deny IP/Subnet from accessing website.
- g) The attackers should receive custom response once they are blocked.
- h) CSP must offer provision to customize response of vulnerable requests.
- i) CSP WAF should be able to monitor attack incidents and simultaneously control the attacker IP.
- j) CSP WAF should be able to Grey list or Backlist IP/Subnet.
- k) CSP WAF should be able to set a limit to maximum number of simultaneous requests to the web server & should drop requests if the number of requests exceed the threshold limit.
- The WAF should be able to set a limit to maximum number of simultaneous connections per IP. And should BAN the IP if the threshold is violated.
- m) CSP WAF should be able to set a limit to maximum length of path to URL.
- n) CSP WAF should be able to limit maximum size of request to Kilobytes.
- o) CSP WAF should be able to limit maximum time in seconds for a client to send its HTTP request.
- p) CSP WAF should be able to BAN an IP for a customizable specified amount of time if the HTTP request is too large.
- q) CSP WAF should be able to limit maximum size of PUT request entity in MB
- r) The WAF should be able to close all the sessions of an IP if it is ban.
- s) CSP WAF should be able to ban IP on every sort of attack detected and the time span for ban should be customizable. There should be a custom response for Ban IP.
- t) The Dashboard should show a graphical representation of
 - i. Top 5 Attacked Websites.
 - ii. Top 5 Attacking IP.

- iii. Top 5 Attack types.
- iv. Top 5 Attacked URLs.
- u) For analysis purpose the Dashboard should contain following information:
 - i. Number of requests to web server.
 - ii. Number of attacks.
 - iii. Number of Attackers.
 - iv. Types of error messages and on. Of error messages sent to the users.
 - v. Total Bytes sent during transaction

2.7.3.3.11 Database support service

- a) Installation, configuration, maintenance of the database (Cluster & Standalone).
- b) Regular health check-up of databases.
- c) Regular monitoring of CPU & Memory utilization of database server, Alert log monitoring & configuration of the alerts for errors.
- d) Space monitoring for database table space, Index fragmentation monitoring and rebuilding.
- e) Performance tuning of Databases.
- f) Partition creation & management of database objects, Archiving of database objects on need basis.
- g) Patching, upgrade & backup activity and restoring the database backup as per defined interval.
- h) Schedule/review the various backup and alert jobs.
- i) Configuration, installation and maintenance of Automatic Storage Management (ASM), capacity planning/sizing estimation of the Database setup have to be provided and taken care by the AMISP.
- j) Setup, maintain and monitor the 'Database replication' / Physical standby and Asses IT infrastructure up-gradation on need basis pertaining to databases

2.7.3.4 Security

Further, commercial CSPs offer cloud services to multiple consumers. In such an environment, the security controls and compliance to various standards (Including ISO 27001, ISO 27017, and ISO 27018) should be verified by third party auditors. Third-party certifications and evaluations provide assurance that effective physical and logical security controls are in place.

Although, the Cloud Service Providers (CSPs) offer assurances of effective physical and logical security controls through the third-party certifications such as ISO 27001, ISO 27017, ISO 27018, etc. and also may provide a host of security services such as encryption, web application firewall, etc., it is the responsibility of the AMISP to define the security services that need to be implemented for their workloads depending on the nature of the applications / data hosted on the cloud.

Now a days, CSPs offer tools and features to help consumers to meet their security objectives concerning visibility, auditability, controllability, and agility. These tools and features provide basic but important security measures such as Distributed Denial of Service (DDoS) protection and password brute-force detection on CSP's accounts.

However, the following basic security features should be ensured by any CSP-

- a) Strong encryption capabilities for data in transit or at rest
- b) Firewalls instance and subnet levels
- c) Identity and Access Management (IAM): Control users' access to cloud services. Create and manage users and groups, and grant or deny access
- d) Managed Threat Detection: Managed threat detection service that provides you with a more accurate and easy way to continuously monitor and protect your cloud accounts and workloads
- e) Managed DDoS Protection: Managed Distributed Denial of Service (DDoS) protection service that safeguards web applications running on cloud.
- f) Web Application Firewall: Helps protect your web applications from common web exploits that could affect application availability, compromise security, or consume excessive resources.
- g) Key Management Service (KMS): Managed service that makes it easy for you to create and control the encryption keys used to encrypt your data

h) Certificate Manager: Easily provision, manage, and deploy Secure Sockets Layer/Transport Layer Security (SSL/TLS) certificates.

- i) Cloud HSM: Meet regulatory compliance requirements for data security by using dedicated Hardware Security Module (HSM) appliances within the Cloud.
- j) Inspector: Automated security assessment service that helps improve the security and compliance of applications deployed on cloud
- k) Organizations: Policy-based management for multiple consumer accounts. With Organizations, you can create groups of accounts and then apply policies to those groups.

CSPs also offers access to additional third-party security tools (e.g., IDS / IPS, SIEM) to complement and enhance the consumers' operations in the Cloud. The third-party security tools complement existing Cloud services to enable consumers to deploy a comprehensive security architecture. These security tools on cloud are equivalent and identical to the existing controls in an on-premises environment.

The AMISP needs to review and validate the security configurations, review the notifications and patches released by the CSP and validate that the same is being taken into consideration during operations, confirm that the audit trails (e.g., who is accessing the services, changes to the configurations, etc.) are captured for supporting any downstream audits of the projects by the finance or audit organization such as STQC.

2.7.3.5 Reporting

Further, the AMISP should insist on the following regular reporting by CSP during the contract:

- a) Availability of the cloud services being used
- b) Summary of alerts that are automatically triggered by changes in the health of those services.
- c) Summary of event-based alerts, providing proactive notifications of scheduled activities, such as any changes to the infrastructure powering the cloud resources
- d) Reports providing system-wide visibility into resource utilization, application performance, and operational health through proactive monitoring (collect and track metrics, collect and monitor log files, and set alarms) of the cloud resources
- e) Auto-scaling rules and limits

- f) In case of any un-authorized access, the Agency should provide logs of all user activity within an account, with details including the identity of the API caller, the time of the API call, the source IP address of the API caller, the request parameters, and the response elements returned by the cloud service. This is required to enable security analysis, resource change tracking, and compliance auditing
- g) Report of all the provisioned resources and view the configuration of each.
- h) Summary of notifications, triggered each time a configuration changes
- i) Incident Analysis in case of any un-authorized configuration changes.
- j) Summary of alerts with respect to security configuration gaps such as overly permissive access to certain compute instance ports and storage buckets, minimal use of role segregation using Identity and Access Management (IAM), and weak password policies
- k) Summary of security assessment report that identifies the possible improvements (prioritized by the severity) to the security and compliance of applications deployed on cloud
- I) Report on upcoming planned changes to provisioning, either possible optimizations, if any, indicating how the underutilized services can be reduced to optimize the overall spend, or required enhancements (e.g., upgrade to additional storage) to meet the service levels defined in the RFP.

2.7.4 Database

2.7.4.1 Initial Database Generation

Development Tools

The AMISP shall provide all necessary software tools for the development and maintenance of the databases required for AMI application.

This tool shall be capable of managing the entire system database. The database development software tool delivered with the system shall be used to generate, integrate and test the database. The system must support export of data into XML format.

The database development tool shall facilitate exchange of both incremental and full data in standard exchange format. The product should have facility to export and import databases from different vendors applications.

2.7.4.2 Management

The database manager shall locate order, retrieve, update, insert, and delete data; ensure database integrity; and provide backup and recovery of

database files. The database manager shall generate and modify all AMI application data by interfacing with all database structures. In systems with a distributed database, the database manager shall have access to all portions of the database wherever stored.

Execution of the database manager in any server of the system shall not interfere with the on-line functions of AMI applications including the normal updating of each server's real-time database. In a primary server, database editing shall be limited to viewing functions, database documentation functions and functions that change the contents but not the structure of the database. Editing the on-line database shall not affect the operation of the primary/backup configuration.

The database manager shall include the mechanisms, in both interactive and batch processing modes, to perform the following functions:

- a) Add, modify and delete database items and data sources such as data links, and local I/O.
- b) Add, modify and delete application program data
- c) Create a new database attribute or new database object
- d) Resize the entire database or a subset of the database
- e) Redefine the structure of any portion of the database.

The AMISP shall be required to provide whether they require or impose any particular hardware and database management techniques to achieve above functionality.

2.7.4.3 Tracking Changes

The database manager utility shall maintain Audit trail files for all changes made by all users (both online/off-line). The audit trails shall identify each change including date and time stamp for each change and identify the user making the change. Audit trail of past 1 year edit operations shall be maintained.

2.7.4.4 Integration

The System should support exchange of data from utility's computerized billing & collection, consumer indexing and asset mapping systems residing at different servers.

2.7.5 Display Generation, Management and Integration (Display Management and Reporting)

The AMISP shall provide necessary software tools preferably browser based for the generation, management and Integration of AMI application displays.

The displays shall be generated and edited interactively using this display generation software delivered with the system. All displays, symbols, segments, and user interaction fields shall be maintained in libraries. The size of any library and the number of libraries shall not be constrained by software. The display generator shall support the creation, editing, and deletion of libraries, including copying of elements within a library and copying of similar elements across libraries. Execution of the display generator functions shall not interfere with the on-line AMI application functions.

Displays shall be generated in an interactive mode. The user shall be able to interactively:

- a) Develop display elements
- b) Link display elements to the database via symbolic point names
- c) Establish display element dynamics via database linkages
- d) Define linkages to other displays and programs
- e) Combine elements and linkages into display layers
- f) Combine display layers into single displays.

All workstation features and all user interface features defined in this specification shall be supported by the display generator software.

The display generator shall support the addition, deletion and modification of segments, including the merging of one segment with another to create a new segment.

Displays shall not be limited by the size of the viewable area of the screen.

The displays shall be constructed from the display elements library. The display definition shall allow displays to be sized to meet the requirements of the AMI application for which they are used. The display generation software shall allow unbroken viewing of the display image being built as the user extends the size of the display beyond the screen size limits.

The display generator shall support the integration of new and edited displays into the active display library. During an edit session, the display generation software shall allow the user to store and recall a partial display. To protect against loss of display work when a server fails, the current work shall be automatically saved every five minutes (user adjustable) to an auxiliary memory file.

The display generator shall verify that the display is complete and error-free before integrating the display into the active display library. It shall not be necessary to regenerate any display following a complete or partial system or database generation unless the database points linked to the display have been modified or deleted.

The system shall generate reports for all the modules in user-defined formats. The system will have a graphical user interface with a capability for generating customized reports, apart from the regular ones mentioned above, as per the requirement of management and operations staff. Display of statistical data shall be presented additionally in graphical formats such as bar- graph/pie diagram etc. for convenience of analysis.

2.7.6 Software Utilities

AMISP shall supply all software utilities used to develop and maintain these software, whether or not specifically described by this Specification. The software utilities shall operate on-line (in background mode) without jeopardizing other application functions running concurrently. Utility software shall be accessible from workstations, processor terminals and servers.

2.7.6.1 Auxiliary Memory Backup Utility

Software utility, to take back-up of auxiliary memory files of server and workstation onto a user- selected archival device such as SAN, shall be installed. Backup shall be maintained for the entire duration of contract period. The backup utility shall allow for user selection of the files to be saved based on:

- a) Server and workstation
- b) File names (including directory and wildcard designations)
- c) File creation or modification date and time
- d) Whether or not the file was modified since the last backup.

Further a utility for taking image backup of auxiliary memory files of the Servers and workstations shall be provided. The utility shall allow restoration of the servers/workstation from this image backup without requiring any other software. An image backup of the as built system of each of the Servers and workstations shall be provided on a user-selected archival device such as SAN, which shall be used to restore the system. Automatic full or incremental back up capability of selected systems at user defined intervals shall be provided. It should be possible to restore or recover any software/system at a selected time from backup.

2.7.6.2 On-Line Monitoring Diagnostics Utility

On-Line monitoring diagnostic programs shall be provided for verifying the availability of the backup equipment and for limited testing of devices without interfering with on-line operations of AMI application system or the failover capability of the devices.

Redundant communication line interface equipment shall be tested by periodically retrieving data over these lines and checking for the ability to communicate with the redundant channel for any errors.

Designated backup server(s) and associated auxiliary memories shall be automatically tested for proper operation to ensure they are ready if needed for a failure over contingency. Any failure to perform diagnostic functions correctly shall cause an alarm to be issued.

2.7.6.3 Data Exchange Utilities

Facility of data export and import between this system and external systems shall be provided through web services.

2.7.6.4 Other Utility Services

AMI Application management shall include the following utility services:

- a) Loading and storage of information from labelled portable media storage units as dictated by the requirements of this specification.
- b) Preparation of .pdf output for the displays/reports available in the AMI Application system. It should also be possible to export all the reports to any MS-Office format.
- c) Displays and Reports for Web server -The AMISP shall provide utilities for preparing displays and reports suitable for Web publishing. These utilities shall be used to generate, all required displays and reports from the system displays and reports, automatically (without requiring rebuilding).
- d) Online access to user and system manuals for all software products (e.g., Operating System and Relational Database Software) and AMI applications shall be provided with computer system
- e) Antivirus Software All computers and firewalls shall be provided with the latest antivirus software as on date of supply. The antivirus software shall have the capability of having its virus definitions updated from time to time. The AMISP shall be responsible for the maintenance & update of the antivirus software during the contract period.
- f) Software Upgrade-The AMISP shall be responsible for the maintenance & update of the patches and signatures of operating system, applications (AMI Applications) system and Web based System up to the contract period.
- g) Automated patch management and anti-virus tools shall be provided to expedite the distributions of patches and virus definitions to the system using an orchestration facility.

These tools should consider the possibility to use standardized configurations for IT resources.

2.7.7 Cyber Security – General Guidance

Cyber security governance problems are unique as well as evolving therefore, they cannot be dealt with a traditional approach. For establishing secure and

resilient Smart Meter systems, a standardized cybersecurity framework should be adopted by the AMISP in consultation with the Utility and relevant stakeholders. The key elements of the cyber security framework must include:

- a) Differentiation of stakeholders into broad categories to aid in proper distribution of responsibilities among stakeholders and avoid overlapping
- b) Defined set of responsibilities for each stakeholder group. As a result, the decision-making process is streamlined, and proper management hierarchy is established for handling the reported cyber-attacks. The roles and responsibilities are divided into two groups:
 - Cyber strategy and governance: The responsibilities under this group relates to the policy and decision-making aspects of cyber security framework
 - ii. **Cyber security risk, operations and compliance:** This group comprises of responsibilities relating to the operational parts of implementing cyber security policies
- c) Standardization of security practices and abundant guidance from knowledge bodies while implementing security controls and processes. There are multiple global security standards and Indian standards that are relevant in context of underlying technologies used in smart meters:
 - i. National Institute of Standards and Technology (NIST) has developed a framework for Cyber Physical Systems (CPS). The Framework provides a taxonomy and organization of analysis that allow the complex process of studying, designing, and evolving CPS to be orderly and sufficiently encompassing.
 - ii. Department of Electronics and Information Technology (DeitY), Government of India has developed a National Cyber Security Policy. It aims at protecting the public and private infrastructure from cyberattacks. The policy also intends to safeguard "information, such as personal information (of web users), financial and banking information and sovereign data".
- d) Cyber security incident management: The ISO/IEC Standard 27035 outlines a five-step process for security incident management, including:
 - i. Prepare for handling incidents.
 - ii. Identify potential security incidents through monitoring and report all incidents.
 - iii. Assess identified incidents to determine the appropriate next steps for mitigating the risk.
 - iv. Respond to the incident by containing, investigating, and resolving it
 - v. Learn and document key takeaways from every incident

Notwithstanding the measures suggested above, the following guidelines/strategies shall be taken care of by the AMISP for making the entire AMI system including the NOMC immune to Cyber Attacks.

- a) All the Hardware, OS and application software shall be hardened.
- b) Application, scanning and hardware scanning tools shall be provided to identify vulnerability & security threats.
- c) Data shall be encrypted at system/device/technology level.
- d) Network Zoning shall be implemented as per the proposed architecture. However, the AMISP may suggest other methods of network architecture without compromising the security of the System.
- e) Internal user shall be allowed to access all adjacent zones. However, they will not have access to remote network zone.
- f) While procuring cyber security items testing must be done and the system must be secure by design.
- g) Residual information risk shall be calculated by AMISP and same shall be submitted to the Utility for approval.
- h) All default user id & passwords shall be changed.
- i) All log in/out and cable plugs in/ out shall also be logged in Central Syslog server.
- j) Penetration & Vulnerability assessment test from CERT-IN certified auditors during SAT & Operations and Maintenance period.
- k) Auditing by third party during SAT and annually during operations and maintenance period shall be in the scope of AMISP.
- I) As the computer system in NOMC has access to external environment the AMISP shall document and implement Cyber Security Policy/Plan in association with the Utility to secure the system.
- m) Latest Cyber Security Guidelines issued by CERT-In specified at http://www.cert-in.org.in/, Ministry of Power (including "Testing of all equipment, components, and parts imported for use in the power Supply System and Network in the country to check for any kind of embedded malware /trojans/ cyber threat and for adherence to Indian Standards Regarding" vide Order No. No.9/16/2016-Trans-Part(2) published by Ministry of Power, Government of India dated 18 November 2020 and amended from time to time) or any other competent authority shall be followed.
- n) AMISP shall adhere with the appropriate security algorithm for encryption and decryption as per established cyber security guidelines. For smooth functioning of the entire system, it is essential that the AMISP shall provide in the form of a document enough details of such algorithm including the mechanism of security key generation to the Utility. In case of proprietary or secret mechanism, the same shall be kept in a secured escrow account.

2.7.8 Data Privacy

AMISP should describe ensure that the system is compliant with the applicable provisions of the "Reasonable security practices and procedures and sensitive personal data or information Rules, 2011 (IT Act)" as well as shall be committed to work with Utility for compliance to Personal Data Protection requirements. In this regard, the general elements of the data privacy framework may include:

- a) The Utility shall be the sole custodian of the Smart Meter data. The AMISP and its contracted vendors will have limited need basis access to the data. In case of pre-mature termination or at the end of contract, the AMISP and the contracted vendors should relinquish all access to the data and transfer the same to the Utility.
- b) AMISP is required to prepare and submit a "Privacy by Design" document to the Utility which details out all the policies, practices, processes and technologies employed to manage, and process the Smart Meter data in a secure manner. This should also include the details on methods of anonymization applied to the personal Smart Meter data based on data types defined below:
 - Aggregated Data: No identification individually and at neighbourhood level unless explicitly required to report
 - ii. Anonymised Data: A data set which has individual Smart Meter data but without any personally identifiable information like consumer name, account number, address etc.
 - iii. Personal Data: A data set with Smart Meter data tagged with personally identifiable information.
- c) AMI system should enable the Utility to get the consumer consent on sharing and processing of Smart Meter data based on following criteria
 - Consumer consent not required
 - 1) If any type of Smart Meter data is processed by the Utility or a third party on behalf of Utility for the purpose of generating bills, identifying theft, network planning, load forecasting or any related activities that can enable the Utility to fulfil its duty as a licensee.
 - 2) If any type of Smart Meter data is requested by the law enforcement agencies.
 - 3) If aggregated or anonymised data is shared with not-for-profit academics, policy research, civil society entities for research that can benefit the sector in general.
 - ii. Opt-out consumer consent
 - 1) If any type of smart meter data is shared with or processed by any third-party commercial entity to provide services other than as

enabled by regulation. In this case, the AMI system should enable the Utility to conduct the following consumer consent process

- Consumer should be notified and given a time to opt-out
- Consumer should have the right to change his/her option through the app/web account/direct communication to Utility.
- d) AMI system should enable following Data sharing protocol
 - i. Data should be shared by providing finite and secure access to the system. The access can be modified or terminated as need be.
 - ii. Sharing of part/full database shall be subject to review and consent of Utility.
- e) All data sharing shall be recorded and periodically submitted to utility for review / regulatory requirement
- f) AMISP should have a data breach response plan and should communicate to the utility and consumers in case of any data breach from AMI system
- g) AMISP is responsible to conduct 3rd party data privacy audit at least once every year based on evaluation criteria pre-identified by the Utility in consultation with data experts. The audit report should be made available to Utility. AMISP to take necessary actions on audit observations in consultation with the utility.

3. AMI System Integrations

The AMISP's core deliverables are the MDM, the HES, the NMS, the Billing System and the smart field devices (DCUs/Routers and Smart Meters). Hence the system integrations shall comprise of the following,

- i. HES with field devices (DCUs/Routers and smart Meters)
- ii. MDM with
 - a. HES
 - b. Billing and CIS
 - c. Other legacy IT/OT systems as required by the utility
 - d. National level Reporting Platform to come up in future

3.1 MDM Integrations with Utility IT/OT Systems

The MDM will act as the bridge to integrate the AMI system with other utility IT/OT systems. These IT/OT systems may be already existing or those which the Utility have planned. The IT/OT systems may include but not be limited to the following:

- a) Billing, CIS, IVRS, CRM systems
- b) Legacy Data Collection Systems
- c) HHU/CMRI or manual reading system etc.
- d) Consumer Portal/ App
- e) GIS
- f) SCADA, OMS
- g) PLM, DRMS
- h) Asset Management System
- i) Work Force Management System
- j) DT Monitoring System
- k) EVSE

The details of the existing integration infrastructure, including specificity in implementation, interface and services available for each of the existing enterprise applications which the AMISP has to integrate with the AMI system, has been provided in Annexure L of this Section.

For those IT/OT systems which the Utility have planned in future, the AMISP shall publish document on available standard interfaces to enable their integration.

It will be necessary to integrate the MDM with the utility IT/OT systems following robust industry standard mechanisms.

Presently, IT billing is functioning through the software developed by NIC using .net framework and is hosted in NIC cloud. The meter reading details are uploaded from TAB and bill processed in the cloud and bill details available to the consumer. The software code will be made available to AMISP and access to demo server will be provided and the AMISP should arrange for integration of AMI system with the above cloud billing system. AMISP shall also provide support for maintenance of the existing billing system. The new IT Billing System shall be fully integrated with the entire AMI system. The Billing System Provider shall share the source code to PFCCL/ Utility.

MDM shall interface with other utility IT/OT systems on standard interfaces. The data exchange models and interfaces shall comply with CIM-XML-IEC 61968-9 / IEC 61968-100 / Web Services / MultiSpeak v3.0. MDM solution shall be ESB-SOA enabled.

The aim of the above interface standards is to ensure generic two-way interfacing of the MDM with other applications. This effort shall be guided by the methodology whose details are outlined in the approach paper set out in Project Implementation Plan.

3.2 HES Integrations with Field Devices

HES shall export all meter data to MDM and pass control commands from MDM. HES should conform to IEC 61968-9 as well as support CIM 2.0 / MultiSpeak v3.0 standards. It may use any other standard interfaces as outlined in the approach paper, submitted as part of project implementation plan, for integrating with the MDM. In case, utility has implemented any Service Oriented Architecture (SOA)/ Enterprise Service Bus (ESB) architecture, the data exchange to and from HES shall be through this ESB. The details of its ESB in the templated provided in Annexure G.

The HES shall follow the integration protocol established by IS 15959 (DLMS-COSEM) and make use of ACSE and xDLMS services to communicate with southbound field devices (DCUs and Smart Meters) irrespective of the physical communication layer.

3.3 Integrated Network Management System

The Network Management function specific to the HES shall be integrated with overall Data Centre level NMS module for easy monitoring, analysis and reporting

3.4 Integration with national level reporting platform

The AMI system put in place should provide a seamless exchange of data with a national level data portal without any manual interface including NFMS. In this

regard, the MDM shall have an out-bound interface to facilitate data transfer through API-based model/ service bus to a central platform as and when made available. An indicative data list will be provided by the Utility for sharing with the national level reporting platform during contract period. The technical interface (such as web services, published APIs, DB table schemas etc.) for enabling this integration, will be defined accordingly. However, the AMISP needs to ensure the following:

- a) Any reports / analytics / graphics from system would provide opportunity to anonymize/ remove traceability to individual consumers to maintain privacy
- b) Reports/data made available in the public domain for public consumption should be always sufficiently aggregated/ anonymized so as to protect consumer privacy.

4. Consumer Indexing

Consumer indexing will be carried out/verified for the incoming population of smart meters for end-to-end metering at contiguous electrical locations in the selected AMI Project Area only. The responsibility for consumer indexing for dispersed metering at non-contiguous electrical locations in the selected AMI Project Area shall lie with the Utility. For this a door-to-door survey shall be required for each meter installed and tallying it with the consumer related records (physical, electrical and commercial) available with the Utility. In establishing the linkage of the consumer meter to the electric network, the asset (including the meter) codification as used by the utility GIS (or as per standards set by the utility) shall be strictly followed. If the GIS asset database is available, the verified consumer data shall be uploaded into the GIS database by the Utility for a single point of truth, presentation and secondary evaluation. If GIS is not available, then the AMISP is required to create a standalone consumer indexing database. This database of electrical indexing shall have the following broad parameters:

- Energy Meter name plate details
- Meter clustering if any
- Sealing Status
- Installation Date
- Start Reading (New Meter) and Last Reading (Old Meter)
- Geo Location
- Customer Name
- Username
- Postal Address / Telephone / Email
- Sanctioned Load
- Pole/DT/Feeder Code

Either of the following checks may be done to establish the correctness of the indexing database. The selection of these methods or any other equivalent method shall be at the sole discretion of the AMISP vendor.

- 1. Correlation of DT wise energy loss with load flow studies; or
- 2. Selective demand trip of DT to identify meters under outage

5. Consumer Engagement

- 5.1 AMISP shall develop a consumer engagement plan for smooth implementation of AMI system. The plan at the minimum should include consumer engagement activities to be undertaken at Utility's headquarter, division and sub-division level as well as communication and media plan for the same. The plan should include educating consumers about the pre-paid recharge mechanism, benefits of pre-paid meters, potential usage of Smart Meters data for consumers, etc;
- 5.2 Utility/ PFCCL shall provide necessary inputs for developing a comprehensive consumer engagement plan;
- 5.3 The Utility/ PFCCL shall implement consumer engagement plan with support of AMISP. However, running media campaign to raise awareness and counter myths around smart metering prior to installation, etc. would be taken care by the Utility

6. Analytics and Reports

6.1 Analytics including Energy Audit

The MDM shall have analysis capability based on configurable business rules including but not limited to the following:

- a) Energy Audit: Perform DT/Feeder/ Sub-Division/ Division/ Circle wise energy audit for configurable period. These energy audit reports shall clearly bring out the technical and commercial losses through detailed analysis of supply side energy data and corresponding aggregated consumption data of connected consumers. In this analysis it must factor in data of energy export from netmetered consumers. The automated audit should include but not limited to:
 - A daily automatic feeder loss (Feeder Head reading minus summation of all DT meters readings)
 - II. Automatic LT Energy loss (DT meter reading minus summation of readings of all those consumer meters served by the selected DT) would be reported
 - III. Billing and collection efficiency
 - IV. Identify the top best as well as worst performing feeders and DTs. However, their number shall be decided later mutually between Utility/ PFCCL and AMISP.
- b) Display consumption/load profiles by configurable period (15/30 min, hour, day, month, year etc.) day type (weekday, weekend, holiday, festival wise etc.) and by tariff, consumer type (hospitals, schools, govt. offices, multiplexes, commercial, residential, industrial etc.), or any user specified collection of meters.
- c) Generate peak & off-peak load patterns by aggregating all loads of consumer group/consumer type/DT/Feeder over configurable period/day type.
- d) Perform load analysis for different groups and categories of consumers in different weather conditions.
- e) Ability to provide the data to load forecasting, load research or demand response applications (based on use cases provided in Annexure H) and perform error management such as missed reads and intermittent meter reads before sharing data with load forecasting, load research or demand response
- f) Ability to configure the system to effectively visualize consumption trends, identify unusual patterns, and visualize load analysis to understand which assets are being over utilized.
- g) Analyzing data to identify new patterns of usage, Setting fraud alert / transformer overload alerts / demand supply gap alert etc.

- h) Ability to receive and store outage and restoration event data from Smart Meters and outage systems and to log all such events for analysis and also support calculation of compensation payments for sustained outages. Five reliability indices shall be calculated,
 - i. System Average Interruption Duration Index (SAIDI), which is sum of all consumer interruption durations in a given period over total number of consumers served.
 - ii. System Average Interruption Frequency Index (SAIFI), which is the total number of sustained interruptions in a given period over total number of consumers served.
 - iii. Consumer Average Interruption Duration Index (CAIDI), which is sum of all consumer interruption durations in a given period over the total number of sustained interruptions in that given period
 - iv. Consumer Average Interruption Frequency Index (CAIFI), which is the total number of sustained interruptions in a given period over the total number of distinct consumers interrupted in that given period
 - v. Momentary Average Interruption Frequency Index (MAIFI), which is the total number of consumer interruptions less than the defined time (1 or 5 minutes) over the total number of consumers served

These reliability indices shall be calculated for each month, for individual feeders and aggregated annually for the whole utility. The source data for outage shall be last gasp/ first breath messages from DT/Feeder level meters or the power outage/restoration events logged by these meters. These computations shall be independent of similar computations made by any OMS application.

- i) Ability to alerts on DT/ Feeder level overvoltage & back-to normal event and under-voltage and back-to-normal events. Based on these alerts the system should calculate the duration in which the DT/Feeder remained outside the nominal zone of defined voltage. Similar calculations should be allowed for power factor and current unbalance.
- j) Identify & visualize poor performing assets such as feeder/DT on multiple criteria such as energy losses, outage duration etc. through appropriate colour coding depending on severity thresholds.
- k) Analyze data of net-metering consumers to identify patterns of energy export to grid on hourly/weekly/monthly/yearly basis.

6.2 Reporting Function

The Report function shall enable the Utility to deliver reports in standard digital format such as PDF, Excel, etc. All queries for report generation shall be made

through user driven drop down menu through GUI of Utility user interface (refer to Clause 2.5.1 of this Section for more details). The AMISP shall provide example queries to support internal report generation needs. The GUI shall have provisions to set up or change report delivery to configurable email addresses, network file directories, ftp sites or printer systems without modifying source program code and without any proprietary language skills.

- 6.2.1 The MDM shall generate following reports (an indicative list only). Utility may request for additional reports as well during the contract period.
 - i. Daily data collection report
 - ii. Usage exceptions
 - iii. VEE validation failures
 - iv. Missing interval Read date and times (on hourly, daily, weekly & monthly basis) and their trends
 - v. Physical meter events (install, remove, connect, disconnect) & meter reset report
 - vi. Meter flags
 - vii. Meter inventory
 - viii. Defective meters
 - ix. AMI performance measurements
 - x. Threshold exception
 - xi. MIS reports and analytical reports including but not limited to following:
 - Payment collection summary and details in a day/week/month/year or as per user selectable period and trends
 - 2) Number / list of disconnected consumers due to inadequate prepaid account balance
 - 3) Prepaid consumers running low on account balance
 - 4) Connected consumers
 - 5) Critical notifications sent to consumers
 - 6) Revenue analytics as per consumption pattern of consumers (in terms of money and energy units). This shall also include automatic compensation payments by Utility to consumers for sustained outages, if implemented

6.2.2 Following high level reports for Utility Management shall be generated automatically at specified frequencies to help management with business decisions. Below is an example of reports that may be generated.

Category	Report	Frequency
	 Energy Audit Report (DT/ Feeder / Sub-Division/ Division/ Circle wise) in contiguous electrical locations: A daily automatic feeder loss report (Feeder Head reading minus summation of all DT meters readings) 	Daily, Monthly and User Selectable Time Period with configurable near real time alerts for exceeding defined loss threshold
Energy Audit	 Automatic LT Energy loss report (DT meter reading minus summation of readings of all those consumer meters served by the selected DT) would be reported Billing and collection efficiency Identify the top [X] best as well as worst performing feeders and DTs 	
Reliability Indices	SAIFI and SAIDI; CAIFI and CAIDI; MAIFI of the feeder(s) and connected consumers would be tracked to measure the improvement in the same overtime and establishing reference levels	Daily, Monthly and User Selectable Time Period
Load Management	DT Loading (Categorize DT as overloaded, optimally loaded, near optimal, under loaded)	Daily, Monthly and User Selectable Time Period with configurable near real time alerts
	Load recording (Consumers): Actual consumption recorded higher than the sanctioned load identifying the top [X] consumers	Daily, Monthly and User Selectable Time Period with configurable near real time alerts
	Load Management Report (Identify top overloaded DTs) and load rise trend	Monthly and User Selectable Time Period
Power Qua LITY	Voltage Deviation Index and Frequency Deviation Index (DT/ Feeder)	Daily, Monthly and User Selectable Time Period with configurable near real time alerts
	Low Power Factor (DT/ Feeder)	Daily, Monthly and User Selectable Time Period with configurable near real time alerts

Category	Report	Frequency	
	Meter Current Unbalance (DT/ Feeder)	Daily, Monthly and User Selectable Time Period with configurable near real time alerts	
	Tamper Alert: as per IS 15959 Part 2	Daily, Monthly and User Selectable Time Period with	
Loss Analytics	Comparison Consumption (system used to detect & track theft suspects)	configurable near real time alerts	
	Consumption lower than the expected		
	pattern (pattern of previous year applied		
	to the monthly average) or monthly average		
	Summary report on top [X] high loss	<monthly and="" selectable<="" td="" user=""></monthly>	
	DTs/ Feeders, top overloaded DTs/	Time Period>	
Management	Feeders, Top feeders/ DTs with most		
Summary	outages (number and duration), Top		
Report (Deabhaarda)	feeders with most power quality issues		
(Dashboards)	(over voltage, under voltage, current		
	unbalance, out of band frequency), DTs		
	with high failure rate		

- 6.2.3 The utility interface should have ability to generate reports on critical and noncritical information received from the HES to the MDM as per Clause 2.3.3 of this Section.
- 6.2.4 The utility interface shall have feature to generate report related to SLAs being mentioned in Clause 7.7 of this Section.
- 6.2.5 Ability to generate various analytics reports as per Clause 6.1 of this Section.
- 6.2.6 AMISP shall submit a detailed report on data being shared as per Clause 2.7.8 on a yearly basis. AMISP shall submit detailed report on any exception in general data sharing on monthly basis. Further, AMISP shall also submit a detailed report for any other time period as requested by utility

7. Operation and Maintenance

7.1 Scope and period

The operation, maintenance, and support services start after the successful completion of the operational go-live of the system as per Clause 9.6 of this Section. Operation, maintenance and support services shall extend up to end of 90 months after operational acceptance of the entire AMI system. The scope of work under operation and maintenance services apart from works mentioned at clause 1.4 ("Facility Management Services (FMS) / Operation & Maintenance (O&M) Services") shall include,

- a) Comprehensive maintenance of all the software (including licensing version upgrades if any and annual technical support cost)
- b) Comprehensive maintenance of all hardware at the Operation and Monitoring Centre, along with field devices (like Smart Meters, DCUs etc.) provided by AMISP under the project
- c) Comprehensive maintenance of all equipment under leased service like cloud data centre, MPLS band width etc.
- d) Comprehensive maintenance of NAN / WAN communication infra between field devices and the cloud data centre
- e) Day to day operations of the AMI system under supervision and authority of the Utility. These shall include among others,
 - New meter installation
 - ii. Changeover of consumer meters from post-paid to prepaid mode and vice versa
 - iii. Firmware update of remote devices (Meters and DCUs) as required
 - iv. Update of tariff slabs
 - v. Ensuring completion of recharge cycle of prepaid consumer meters
 - vi. Connecting, disconnecting or reducing consumer's licensed load under approval from the Utility
 - vii. Initiating resolution of consumer trouble tickets raised by utility CCS
 - viii. Ensuring availability of BP, LP, interval data and event notifications from meters in time schedules as agreed with the utility
 - ix. Ensuring scheduled completion of billing determinant calculations
 - x. Ensuring daily reports from the AMI system as per agreed list, are made available to utility
 - xi. Ensuring Consumer Portal is kept updated
 - xii. Ensuring smooth data traffic between the MDM and utility systems
 - xiii. Patch management of AMI applications at cloud data centre
 - xiv. Provide backup data to support SLA and AMISP invoicing
 - xv. Carry out performance checks of various functions as per agreed schedule or on demand

As part of their Operation and Maintenance responsibilities, the AMISP shall develop a compendium of Operation and Maintenance Manuals covering the areas mentioned in serial number e), Clause 7.1 of this Section. These manuals shall be kept updated as often as necessary to reflect best practices being employed in the project.

The AMISP is to hand hold the Utility team to take over operation, maintenance and support services after completion of contract period. The project/ system devices should allow their functionalities to be upgraded without disruption to the existing functionalities by downloading new software and configuration information.

7.2 AMISP's Responsibilities under Operation & Maintenance Services

The AMISP shall make available the following man-power resources at the utility's Network Operations cum Monitoring Centre,

- a) One resident Project Manager cum Supervisor,
- b) Four numbers operations staff
- c) One support engineer for each category of hardware supplied and
- d) One software specialists for each domain.

The above-mentioned operation and support staff shall be made available as required to meet the SLA and system availability requirements. Re-distribution of any support engineer/specialist at the cloud Data Centre shall be at the discretion of the AMISP.

It shall be the responsibility of the AMISP to collect meter data through handheld meter reading instruments for the balance meter data reads not fulfilled by the automated remote reading process. Similarly, if the remote connect / disconnect facility fails, it shall be the AMISP's responsibility to manage the function locally.

7.3 Maintenance Practices

For all third-party equipment (Hardware & Software) AMISP shall have back to back support along with supply of spare with appropriate response time from OEM/OEM Authorized representatives. AMISP shall be responsible for coordination with the OEM for all matter related to equipment.

The maintenance practice followed by AMISP shall be in accordance with best industry practices and must include the following:

- a) Scheduled preventive maintenance, performance monitoring, system backup, hardware & software maintenance and update, field & network devices firmware update, emergency response and troubleshooting etc.
- b) Maintaining adequate spares for maintenance.

7.3.1 Preventative Maintenance Activity

The preventive maintenance activities shall be performed by the AMISP to keep the system running at optimum level by diagnosis and rectification of all hardware and software failures and would broadly include:

- a) Repair / replacement of defective equipment
- b) Configuration of the replaced hardware and software, periodic routine checking as part of a preventive maintenance program
- c) Monitoring of the performance of the system and doing necessary tuning for optimum performance to accommodate any changes such as addition of new components
- d) Providing all necessary assistance to the Utility for addition and modification of utility user interface, consumer Portal/ App displays, and Database
- e) Ensure Backup of the system at regular interval which is mutually decided during system design
- f) Restoration of the systems upon its failure and to restore the functioning of the various application / systems at the cloud data centre. Towards this, the RPO and RTO shall have to be measured no less than once a month.

7.3.2 Integration of Equipment

All future services, protocol emulations and configuration support for integration of Smart Meters/ nodes, routers, access points, network devices, web services, integration with other offline applications etc. shall be the responsibility of AMISP and shall be part of the maintenance activities.

7.3.3 Spares inventory

As part of project implementation plan, the AMISP shall detail the spares inventory that shall be maintained for the AMI Project. These spares shall be used as and when required by the AMISP for the project and no separate charges shall be payable. The AMISP shall decide the items and components to be maintained as spare

7.4 Monitoring

The operation and performance of the various systems shall be monitored on a continuous basis. The AMISP shall conduct at least the following monitoring:

- a) MDM / HES system error history logs or selected day
- b) Field & Network device failure rate and trends
- c) Availability of various communication links

- d) Missing meter data rate and trend
- e) Reviewing resource information
- f) Cyber Security

During monitoring if any defect/ abnormality is found, the AMISP shall undertake corrective maintenance for the same. The Utility's UI shall be kept updated with a summary of such monitored data

7.4.1 System Cyber Security Monitoring

The AMISP shall also be responsible for monitoring of the system from cyber security perspective. The logs of the system shall be analyzed for exceptions and the possible incident of intrusion/trespass shall be informed to the Utility and analysed to discover root cause. The monitoring shall encompass all cyber security devices installed at the cloud data centre as well as at the NOMC such as firewalls, all types of Intrusion prevention system, routers etc.

The Cyber security system shall also be subjected to Annual Security Audit from CERT-In listed auditors at the cost of the AMISP during the contract period. AMISP shall share with Utility such audit reports and implement the recommendations/remedial actions suggested by the Auditor.

7.5 Meter Accuracy Tests

Meter testing for acceptance at site shall be arranged by AMISP as per sampling plan mentioned in relevant IS Standards for Acceptance Tests. The cost towards such testing shall be borne by AMISP and shall be done at a NABL accredited Lab as decided by Utility or as per Joint Electricity Regulatory Commission (JERC) recommendation if any available. AMISP shall make arrangements for testing of meters prior to installation. The AMISP shall facilitate the Utility for compliance of JERC regulations/ directions and CEA guidelines on operation, testing and maintenance of meters supplied by AMISP. Provided further that post installation if the meter is found to be defective/ burnt due to reasons attributable to AMISP as well as for testing of meters based on consumer complaints, AMISP shall get the same tested in Utility Lab or any NABL accredited lab approved by Utility/ JERC. The testing charges, testing timeline, penalty for not adhering to testing timelines etc. would be as per JERC. AMISP shall pay the testing charges and penalty for defective meters and replacement of meters free of cost in case the meters are found to be defective after installation.

7.6 Physical Maintenance

The AMISP shall undertake physical maintenance of all equipment/modules under the scope of this contract, in accordance with the schedule as indicated by AMISP in project implementation plan. The physical maintenance shall include cleaning, dusting, inspection of equipment for loose connections, damage to insulation, pest

infections etc. Equipment shutdown during preventive maintenance shall be deemed as available.

7.7 Service Level Agreement (SLA)

Service Level Agreement (SLA) shall be monitored as mentioned in the following table. It is expected that the AMI system shall meet the minimum threshold of service defined against each lever. Any degradation below this minimum threshold will attract penalties as per bands of service level met. The idea is that it triggers a proper review of any defect / failure / performance that had been agreed upon for the project, and to find resolutions in keeping with the highest standards of service excellence. The total penalties under SLA categories are capped at 20% of AMISP's FMS portion of the Contract Value. AMISP shall ensure that the data collection and computation for the purpose of SLA penalties (as mentioned in the following table) should be automated and visualised in Utility Interface as per Clause 2.5 of this Section.

For this purpose, each of the designated scheduled tasks in the following table, shall signal⁴ the SLA computation application to record the start time. The same designated tasks shall generate mile-stone signals⁵ in order that the SLA application is able to record times when various thresholds (as indicated in the table) of meter population have responded. For system level availability, the SLA computation application shall offer a ticketing system which shall be used by the Utility &/or AMISP to raise an incident against any line item at corresponding severity level. The incident originator shall select the severity level followed by selecting the incident description (as per Annexure J) available as a drop-down list within the SLA application. The ticketing system shall follow a process flow such that.

- a) The AMISP's response along with time of response are recorded. This 'response' may be a simple acknowledgement of the incident or a rejection of the incident as not being part of its 'scope of work' with adequate explanation.
- b) Utility's acknowledgement or rejection of AMISP 'response' along with time are recorded. If utility acknowledges the incident to be irrelevant to AMISP's scope of work, then the incident is immediately closed, and no further records are maintained for this incident⁶.
- c) Resolution &/or workarounds are recorded and submitted by AMISP along with time
- d) In case of enhancements and change requests, AMISP's Plan of Action (POA) and schedule are recorded

⁴ This signal shall be always automated, and the SLA Application would know precise number of meters involved.

⁵ Alternate provision may be kept for manual entry of time for such mile-stone signals but with proper backup monitoring report made available.

⁶ The first two process steps in the ticketing system of the SLA App shall ensure complete agreement between Utility and AMSIP, before an incident is accepted for resolution.

- e) AMISP's POA and schedule (for enhancements and change requests) are approved by utility
- f) Resolution as submitted by AMSIP is approved by utility and the incident closed. In case of rejection of resolution, the incident shall remain live and shall have to be re-worked by the AMISP.
- g) All submittals, acknowledgements, approvals/agreements shall have system generated time stamps by default. There shall be also provision for a separate manual entry of time stamps.

Data Type	Performance Requirement (Averaged over a month) ⁷	Penalty	SLA Penalty Calculation (For understanding purpose only)
A. Scheduled Tasks			
1. Scheduled Interval data r	eadings		
Periodic collection of the interval load profile data for the day ⁸	From 95% of meters within 8 hours	Deduction of 0.2% of AMISP's Contract Value for every 1% or part there of capped at 1% penalty	Maximum Penalty of 1% if action takes place for <91% of meters
2. Scheduled Interval data r	eadings		
Periodic collection of the interval load profile data for the day ⁹	From 98% of meters within 12 hours	Deduction of 0.2% of AMISP's Contract Value for every 1% or part there of capped at 1% penalty	Maximum Penalty of 1% if action takes place for <94% of meters
3. Scheduled daily meter re	adings		
Previous days'10 interval energy and total accumulated energy	From 99.5% of meters within 24 hours after midnight	Deduction of 0.2% of AMISP's Contract Value for every 1% or part there of capped at 2% penalty	Maximum Penalty of 2% if action takes place for <90.5% of meters
4. Scheduled billing profile	data for the bill period		
Collection of billing data for the bill period	From 100% of meters within 72 hours of the scheduled periodic collection/ end of the billing period. Please refer to Annexure K for the billing schedule	Deduction of 0.5% of AMISP's Contract Value for every 0.5% or part there of capped at 3% penalty	Maximum Penalty of 3% if action takes place for <97.5% of meters
5. Scheduled energy audit a	and reliability indices report ¹¹ (D	OT wise)	
Generation of monthly energy audit and reliability indices report	From 100% of DT installed meters within 384 hours (16 days)	Deduction of 0.1875% of AMISP's Contract Value for every 1% or part there of capped at 1.5% penalty	Maximum Penalty of 1.5% if action takes place for <93% of meters

⁷ Local intervention allowed to achieve SLAs

⁸ Assuming interval of 15 minutes.

⁹ Assuming interval of 15 minutes.

¹⁰ All previous days from the last billing cycle

¹¹ As defined in Clause 6 of this Section. Unless both energy audit and reliability indices report (DT wise) are generated at scheduled periodic interval, AMISP shall be considered non-compliant to the defined SLA and shall be liable to penalties.

Data Type	Performance Requirement (Averaged over a month) ⁷	Penalty	SLA Penalty Calculation (For understanding purpose only)
6. Scheduled energy audit a	6. Scheduled energy audit and reliability indices report ¹² (Feeder wise)		
Generation of monthly energy audit and reliability indices report	From 100% of installed Feeder meters within 384 hours (16 days)	Deduction of 0.25% of AMISP's Contract Value for every 0.5% or part there of capped at 1.5% penalty	Maximum Penalty of 1.5% if action takes place for <97.5% of meters
B. Remote Actions / tasks p	erformed by AMI System		
7. For remote connect/disco	onnect with acknowledgement/	response for selected meters	
Remote connect / disconnect of the AMI meters	Action performed at 90% of meters within 15 minutes	Deduction of 0.5% of AMISP's Contract Value for every 0.5% or part there of capped at 2.0% penalty	Maximum Penalty of 2.0% if within 15 minutes, delivery takes place for <88.5% of meters
8. For remote connect/disco	8. For remote connect/disconnect with acknowledgement/ response for selected meters		
Remote connect / disconnect of the AMI meters	Action performed 99.5% of meters within 6 hours	Deduction of 0.25% of AMISP's Contract Value for every 0.5% or part there of capped at 1.0% penalty	Maximum Penalty of 1.0% if within 6 hours, delivery takes place for <98% of meters
9. Remotely top-up amount	(for pre-paid application only)		
Delivery of top up amount/ credit recharge in case of prepayment post successful transaction from payment gateway up to consumer interface ¹³	99.9% meters within 30 minutes (delivered and intimated to consumer)	Deduction of 0.5% of AMISP's Contract Value for delay of every 0.5% or part there of capped at 3.0% penalty	Maximum Penalty of 3.0% if within 30 minutes, delivery takes place for <97.4% of meters
C. System Availability			
10. Availability of AMI Syster	n per month		
Availability of AMI System per month	≥99.5%	Deduction of 0.4% of AMISP's Contract Value for every 0.5% or part there of reduction in availability capped at 4.0% penalty	Maximum penalty of 4% shall be deducted when system availability is <95.0%

Notes:

¹² As defined in Clause 6 of this Section. Unless both energy audit and reliability indices report (Feeder wise) are generated at scheduled periodic interval, AMISP shall be considered non-compliant to the defined SLA and shall be liable to penalties.

¹³ Delay in delivery of credit recharge information to payment gateway or Utility Billing System excluded from the SLA measurement

- 1. Maximum Penalty out of the above shall be restricted at 20% of AMISP's FMS portion of the Contract Value. The deduction shall be computed as AMISP's FMS portion of the Contract Value X penalty % as computed in above table
- 2. The penalty, as mentioned above, shall be computed as per the performance deviated from the performance requirement. For instance, for SLA "Periodic collection of the interval load profile data for the day", if within 8 hours, data is received from only 94.6% meters which means deviation of 0.4%, then the penalty shall be computed as $\left(\frac{\max{(0.4\%,1\%)}}{1\%} X \ 0.1\%\right) = 0.1\%$.
- 3. Averaged over a month means weighted average performance from meter population over a predefined time interval. For instance,
 - a. Assuming on ith day or event, action was done on y_i% of total meters and within stipulated time, data was received from z_i% of y_i% meters. So, the average SLA over the month shall be computed as $\frac{\sum z_i \times y_i}{\sum y_i}$
 - b. For system availability, the availability is computed as $\frac{THM (S1\ X\ 1 + S2\ X\ 0.8 + S3\ X\ 0.5)}{THM}$; Where THM is total hours in the month when power supply to AMI system is available, S1/S2/S3 is the total non-available hours in Severity Level-1/Level-2/ Level-3. Please refer to Annexure-I for more details on the same.
- 4. AMISP shall submit AMI generated reports for cases mentioned above based on data available in HES/MDM
- 5. Exclusions: Power Outages, Meter bypass by consumers, Local Temporary/ Permanent disconnection by Utilities, Meter burnt shall be excluded from above SLA calculations. For these cases, joint visit of AMISP and PFCCL/ Utility officials shall be carried out and field inspection report shall be submitted by AMISP to PFCCL/ Utility for suitable action.
- 6. For the purpose of joint visit, AMISP shall put a request to PFCCL/ Utility who should allocate manpower for joint visit within 1 working day. In case of non-allocation/ non-availability of manpower from PFCCL/ Utility, the report submitted by AMISP shall be final and actionable by PFCCL/ Utility.
- 7. The penalties would be computed on the basis of performance of AMISP for a calendar month.
- 8. AMISP shall be responsible for collection of billing data for all Smart Meters within a week of the scheduled periodic collection/ end of the billing period.

7.8 Duties of PFCCL/ Utility and AMISP during Operations and Maintenance Phase

The table in this section provides a summary definition of the roles and responsibilities of the AMISP and PFCCL/ Utility during operation and maintenance phase of the AMI Project.

Legend:

• This indicates who has primary responsibility to perform this function

A: This indicates who will provide assistance

F: Feedback

Item	Task	Utility/ PFCCL	AMISP
1.0	Problem Identification		
1.1	Root cause analysis to determine whether the fault is attributable to Hardware or Software.	F	•
1.2	Resolution of problems involving third party maintainer where there is uncertainty whether the root cause is hardware or software.	А	•
2.0	Software Problem Resolution		
2.1	Report problem and assist with problem identification	F	•
2.2	Provide or recommend corrections, temporary patches, workarounds or other fixes to system problems	F	•
2.3	Install and test corrections, temporary patches, workarounds or other fixes to system problems	F	•
3.0	Routine Software (including MDM, HES, Utility Interface, Consumer app/portal) Support		
3.1	Build and maintain database, displays and reports	F	•
3.2	Perform system back-ups	F	•
3.3	Restore or reinstall software from back-ups	F	•
3.4	Monitor system logs (part of remote monitoring service)	F	•
3.5	Maintain system logs	F	•
3.6	Maintain user accounts	А	•
4.0	Hardware (including meter, DCUs, routers, network operation and monitoring center etc.) Problem Resolution		
4.1	Report problem and assist with defining problem	А	•
4.2	Troubleshoot problem to diagnose if it is software- related or hardware-related	F	•

Item	Task	Utility/ PFCCL	AMISP
4.3	Identify failed component, replace failed components in the system using parts from spares inventory	F	•
4.4	Restore operation of repaired/replaced equipment	А	•
5.0	Hardware Spare Parts		
5.1	Manage local spares inventory	F	•
5.2	Replenish local spares inventory	F	•
6.0	Integration and Database Work At NOMC End		
6.1	Field Device Integration	А	•
6.2	Other System Integration	А	•
7.0	Cyber Security Monitoring		
7.1	Patch Updates	F	•
7.2	Cyber Security Monitoring	F	•
7.3	Annual Audits	F	•
7.4	Implementation of Recommendations during Audit	F	•
8.	Manual Meter Read Through HHU In Case of Non- Communication of Smart Meters	А	•

8. Training Requirements

8.1 Training Categories

The AMISP is required to organize following categories of training for the Utility personnel:

- a) Professional Training This is the training for the core group of implementation team of the Utility. This team will comprise of members from all the Business Functions and IT sections. Each member would be trained in the relevant function/ module. This Training would be required to be given to identified personnel of PFCCL and Utility on operation and maintenance of AMI Infrastructure (at least 2 times a year during first 3 years for 6 persons per batch). It is the responsibility of AMISP to deliver this training. Standard curriculum designed and agreed by the Utility for hardware, software and network preferably shall be arranged by the AMISP for each group. The Utility will prefer if a portion of the training is conducted on-site.
- b) **End User Training** The AMISP will provide training to the PFCCL's and Utility's team on a "Train the Trainer" basis. The Utility's team so trained will then train all of the Utility's end users. It is estimated that this training will require around 2 groups, with each group comprising of around 6 persons. These training sessions will be required to be conducted at any of the sites. The recommended training material can be in paper / electronic media with courses on Business Process Automation software fundamentals, business process overview, job activity training, and delivery options being on-line, CBTs, instructor led classrooms, etc.

8.2 Training modules

The training modules shall include but not be limited to:

- a) AMI Administration & Configuration
- b) AMI Installation and troubleshooting
- c) Application Management and Operations
- d) Database and Data Analysis Reports
- e) Cyber Security
- f) Smart Meter and communication technology

An indicative list of training is as provided below.

Item Description No. of Duration in weeks Total Man-weeks

No.		Trainees	At Utility's facility	At AMISP's facility	At Utility's facility	At AMISP's facility
1	Smart Grid components Hardware and Software Course	30	1	1	30	30
2	Database, Report and Analytic Building Course	10	1	1	10	10
3	Application Software	20	1	2	20	40
4	Operator training & Maintenance course	40	1	0	40	0
5	Smart Meter & Communication network	15	1	0	15	0
6	Cyber Security Training course	5	0	1	0	5
	Total	120	5	5	115	85

8.3 Training Schedules

As part of the project implementation plan (refer Clause 10.1 of this Section), the AMISP shall draw up a training schedule in consultation with PFCCL/ Utility. This will enable the PFCCL/ Utility representatives gain knowledge and understanding of the activities during the following stages of the project implementation, so that they may discharge effective oversight and witness capabilities.

- 1. Pre-FAT
- 2. Pre-Operation Go-Live
- 3. Operation and Maintenance
- 4. End of Contract

The training modules as described in Clause 8.2 shall be distributed among these phases of the training schedule and mutually agreed.

8.4 General Requirements

General requirement for training to be imparted is as follows:

- a) Training shall be conducted by AMISP personnel who are experienced instructors and speak understandable English.
- b) The AMISP shall provide training to various user groups nominated by the PFCCL/ Utility. The AMISP shall provide the Training Approach in the response
- c) All necessary training material shall be provided by the AMISP. Each trainee shall receive individual copies of documents used for training. Training material shall be organized by functional process that will serve as the training documentation for a particular functional area.

- d) Training materials, including the documents provided to the trainees as well as handouts, shall become the property of PFCCL/ Utility. PFCCL/ Utility reserves the right to copy such materials, but for in-house use only.
- e) For all trainings the travel expenses of PFCCL/ Utility will be borne by PFCCL/ Utility respectively.
- f) The schedule, location, detailed contents, for each course shall be finalized during detail engineering. The number of participants in the training program may undergo change. However, all the training courses shall preferably be conducted in single batch. Training shall be done in batches comprising of Introduction, Basic and Advanced categories.
- g) The training will consist of a curriculum of courses to address the issues of system operation, system troubleshooting, business-wide application, changed business processes and general use of the new system.
- h) Representatives from the AMISP, PFCCL's/ Utility's project management teams will be involved throughout in the development of training strategy, training material design and development, standards and training delivery to ensure that change management issues are incorporated, and that training strategies and materials are aligned to the requirements of the project and as business-specific as possible.
- i) Two Engineer's from the Utility shall be stationed at the AMISP's works during development/customization of solution as per the RFP. The deputed utility engineers shall be involved with the project till its completion.

9. Tests, Inspections and Management of the Quality Assurance / Quality Control Program

9.1 Responsibility of Tests and Inspection

Test and inspections are in the complete purview of the AMISP and its subvendors. It shall be ensured that there are no conflicts in roles played between AMISP personnel carrying out tests / inspections, and those assigned responsibilities of quality assurance (QA) and quality control (QC).

The QA/QC organization of the AMISP shall be an independent administrative and functional structure reporting via its manager to the AMISP's top management. The QA/QC manager(s) shall have the authority within the delegated areas of responsibility to resolve all matters pertaining to quality when actual quality deviates from that stated in the Work Statement. The personnel performing QA/QC functions shall have well-defined responsibility, authority, and organizational freedom to identify and evaluate quality problems and to initiate, recommend, or provide solutions during all phases of the Contract.

The QA/QC Manager designate for the project shall be the custodian of all inspection and test records/certificates. QA/QC Manager either directly or through its authorised representative shall be responsible for all witness testing, approval of test records and in general, management of the QA/QC program of the project.

The responsibility for inspections and tests is borne by the Inspections and Tests Manager. This team is responsible for creating the various inspection and test procedures and under the general supervision of the QA/QC Manager, conducts the tests.

In the event any imports are required for the purposes of this AMISP Contract, such imports shall be in accordance with all applicable laws including those issued by Ministry of Power (Order No. No.9/16/2016-Trans-Part(2) dated 18 November 2020; as amended and/ or modified from time to time) for testing of imports including those from prior reference countries.

9.2 In-Process Inspection

9.2.1 Type Testing and Data Exchange Protocol Testing

Type Tests shall be defined as those tests which are to be carried out to prove the design, process of manufacture and general conformity of the product as per BIS standards. The Data Exchange Protocol Tests are defined as those tests which establish compliance with DLMS/COSEM application layer. The Type Testing and the Data Exchange Protocol Testing shall comply with the following general conditions:

- a) The QA/QC Manager shall document, within scheduled period as per project plan, copies of test reports and certificates for all the Type Tests that are specified in the specifications and that have previously been performed. These certificates shall apply to items and equipment that are essentially identical to those due to be delivered under the Contract and test procedures and parameter values shall be identical to those specified in this specification. The type tests shall be carried out at nationally/Internationally accredited labs and type test certificates shall not be more than three years old.
- b) Type Tests shall be performed for all equipment types for which certification is not provided as required above. If any of the type tests are required to be carried out, the same shall be carried out by the AMISP.
- c) For direct connected Smart Meters, the Type Tests shall follow IS 16444 read in conjunction with IS 13779. The test schedule adopted for running the Type Tests along with the sampling criteria and the criteria for conformity shall follow IS 13779.
- d) For transformer operated Smart Meters, the Type Tests shall follow IS 16444 (Part 2) read in conjunction with IS 14697. The test schedule adopted for running the Type Tests along with the sampling criteria and the criteria for conformity shall follow IS 14697.
- e) For pluggable NIC modules, the type tests shall be carried out with the NIC module integrated in the field device that is meters and DCUs being supplied under the project.
- f) Type Tests and Data Exchange Protocol Tests shall be certified or performed by nationally/internationally reputed laboratories using material and equipment data sheets and test procedures that have been developed for the project. The test procedures shall be formatted as in the specifications and shall include a complete list of the applicable reference standards before commencement of test(s).
- g) The AMISP shall prepare a detailed schedule for performing all specified type tests.
- h) The AMISP shall ensure that all type tests can be completed within the time schedule offered in its Technical Proposal.
- i) In case of failure during any type test, the AMISP shall follow the conformance criteria as laid out in corresponding standard (refer serial number c and d above).

j) For direct connected Smart Meters, the Data Exchange Protocol Tests shall follow IS 16444 (Part 1) read in conjunction with IS 15959 (Parts 1 & 2). The sampling criteria for running these tests shall be [one per one lakh] smart meters under production.

- k) For transformer operated Smart Meters, the Data Exchange Protocol Tests shall follow IS 16444 (Part 2) read in conjunction with IS 15959 (Parts 1 & 3). The sampling criteria for running these tests shall be [one per one lakh] smart meters under production.
- Documentation for all factory, field, and availability tests that apply to the AMI system shall be provided in accordance with the requirements defined in this section of specification

9.2.2 Quality Assurance and Quality Control Program

The QA/QC Manager shall maintain a Quality Assurance/Quality Control (QA/QC) program that provides that equipment, materials and services under this specification whether manufactured, designed or performed within the AMISP's plant, in the field, or at any sub-contractor's source shall be controlled at all points necessary to assure conformance to contractual requirements.

The program shall provide for prevention and ready detection of discrepancies and for timely and positive corrective action. The QA/QC Manager shall document objective evidence of quality conformance.

Instructions and records for quality assurance shall be controlled and maintained at the system levels. The AMISP shall outline its QA/QC program plan along with any supporting documents in the Technical Proposal and update the QA/QC program document following site the survey.

A Quality Assurance Program of the AMISP shall cover but not be limited to the following:

- a) The organization structure for the management and implementation of the proposed Quality Assurance Program
- b) Documentation control system
- c) Qualification data for key personnel
- d) The procedure for purchase of materials, parts/components and selection of Sub-contractors' services including vendor analysis, source inspection, incoming raw material inspection, verification of material purchases, etc.
- e) System for shop manufacturing including process controls
- f) Control of non-conforming items and system for corrective action
- g) Control of calibration and testing of measuring and testing equipment

- h) Inspection and test procedure for manufacture
- i) System for indication and appraisal of inspection status
- j) System for quality audits
- k) System for authorizing release of manufactured product
- I) System for maintenance of records
- m) System for handling, storage and delivery
- n) A Quality Plan detailing out the specific quality control procedure adopted for controlling the quality characteristics of the product.

The QA/QC Manager shall be required to make available to the Inspection and Testing Team, all the Quality Assurance Documents as stipulated in the Quality Plan at the time of inspection of equipment/materials.

9.2.3 Scope and Duties of QA/QC Program Manager

The QA/QC Manager of the AMI Project shall have the right to carry out Quality Audit and Quality Surveillance of the systems and procedures of the AMISP's/his vendor's Quality Management and Control Activities. The scope of the duties of the QA/QC Manager, pursuant to the Contract, will include but not be limited to the following:

- a) Review of all the AMISP's drawings, engineering data etc.
- b) Witness or authorize its representative to witness tests at the manufacturer's works or at site, or at any place where work is performed under the Contract.
- c) Inspect, accept or reject any equipment, material and work under the Contract in accordance with the specifications.
- d) Issue certificate of acceptance
- e) Review and suggest modification and improvement in completion schedules from time to time; and
- f) Monitor the Quality Assurance program implementation at all stages of the works.

9.2.4 Inspection and Test

All materials furnished and all work performed under this Specification shall be inspected and tested. Deliverables shall not be shipped until all required inspections and tests have been completed, all deficiencies have been

corrected, and the equipment has been approved for shipment by the QA/QC Manager

Documents identified in the hardware and software quality assurance plan and procedures shall be inspected to verify that the required quality assurance activities have been performed in the manufacturing process of hardware and software.

Inspections will include visual examination of hardware, enclosure cable dressings, and equipment and cable labelling.

Should any inspections or tests indicate that specific hardware, software or documentation does not meet the Specification requirements, the appropriate items shall be replaced, upgraded, or added by the AMISP as necessary to correct the noted deficiencies. After correction of a deficiency, all necessary retests shall be performed to verify the effectiveness of the corrective action.

The test shall be considered complete when (a) when all variances have been resolved; (b) all the test records have been filed; (c) QA/QC Manager acknowledges in writing the successful completion of the test.

9.2.4.1 Test Plans & Procedures

Test plans shall be provided by the QA/QC Manager, for all tests to ensure that each factory and field test is comprehensive and verifies all the features of the equipment are tested.

The Inspection and Test Manager in AMISP shall prepare detail testing procedure in line with specification. The procedure shall be modular to the extent possible, which shall facilitate the completion of the testing in the least possible time.

During the development of test plans and test procedures for the system, emphasis shall be placed on testing each conditional logic statement, checking error conditions, and documenting the simulation techniques used. The test plans and test procedures shall be modular to allow individual test segments to be repeated as necessary.

9.2.4.1.1 Test Plans

The test plans shall describe the overall test process, including the responsibilities of individuals and the documentation of the test results. The following shall be included in the test plans:

- a) Test schedule on a day-by-day basis
- b) Responsibilities of test engineer and QA/QC personnel
- c) Record-keeping assignments, procedures, and forms

- d) Procedures for monitoring, correcting, and retesting variances
- e) Procedures for controlling and documenting all changes made to the hardware and software after the start of testing
- f) Block diagrams of the hardware test configuration, the external communication channels, and any test or simulation hardware.

9.2.4.1.2 Test Procedures

The test procedures shall describe the individual tests segments and the steps comprising each segment, particularly the methods and processes to be followed. The test procedures in general shall include the following items:

- a) Name of function to be tested;
- b) References to the functional, design, user, and any other documents describing the function;
- List of test segments to be performed and the purpose of each test segment;
- d) Set-up conditions for each test segment, including descriptions of the test equipment;
- e) Descriptions, listings, and instructions for test software tools and displays if any;
- f) Step-by-step descriptions of each test segment, including user actions for each test step;
- g) Expected results for each test segment, including pass/fail criteria;
- h) Descriptions of the techniques and scenarios to be used to simulate system field inputs and controlled equipment;
- i) Copies of any certified test data to be used in lieu of testing.

9.2.4.1.3 Test Records

The complete record of all factory and field acceptance tests results shall be maintained by the designated QA/QC Manager of AMISP. The records shall be maintained in a logical form and shall contain all the relevant information. The test reports shall be signed by the inspection & testing engineer and the QA/QC representative witnessing the tests. The records shall be keyed to the test procedures. The following items shall be included in the test records:

- a) Reference to appropriate test procedure
- b) Date of test
- c) Description of any test conditions, input data, or user actions differing from that described in the test procedure
- d) Test results for each test segment including a pass/fail indication
- e) Identification of AMISP's test engineer and QA/QC representative.
- f) Provision for comments by test engineer and QA/QC representative
- g) Copies of any variance reports generated
- h) Copies of reports, display copies, and any other hardcopy generated as part of the test.

9.2.4.1.4 Reporting of variances

Starting from the dry run test period, a variance report shall be prepared by the inspection and testing engineer each time a deviation from the requirements of this Specification is detected in areas such as system functions, design parameters, performance, documentation, test plans, and test procedures. Record of all such variances and their resolution shall be maintained by the QA/QC Manager.

However, at any stage if QA/QC Manager feels that quality of variances calls for suspension of the testing the testing shall be halted till satisfactory resolution of variances, which may involve retesting.

The report shall include a complete description of the variance, including:

- a) Sequential identifying number assigned to the variance
- b) Date and time the variance was detected
- c) Appropriate references to the test procedures and this Specification
- d) Description of test conditions at the time the variance was detected
- e) Identification of testing and QA/QC representatives
- f) Estimated date and time when variance is expected to be fixed
- g) Description of the corrective actions taken (to be completed as part of the variance resolution process

h) Dated signature lines for the QA/QC and test representatives to signify reporting and correction of the variance.

Each variance shall be assigned to one of three classes defining the action to be taken to resolve the variance:

- a) <u>Class 1</u>: Testing will immediately stop and the AMISP will evaluate and correct the variance before testing is resumed
- b) Class 2: Testing will continue, and the variance will be evaluated and corrected by the AMISP at the end of the current session but prior to further testing
- c) <u>Class 3</u>: Testing will continue, and the variance will be evaluated and corrected at a mutually agreed upon time between QA/QC Manager and the Inspection and Testing Manager.

The class shall be assigned by the QA/QC representative.

The QA/QC Manager shall maintain and periodically distribute a variance summary that lists for each variance the report number, a brief description of the variance, its class, and its current status (open or resolved).

All actions taken to correct variances shall be documented on the variance report by the AMISP. Sufficient information shall be recorded to enable QA/QC representative to determine the need for and extent of retesting, the need for testing interactions of the correlation with any previously tested hardware or software, and the need for updating appropriate documentation. A variance shall be deemed resolved after retesting has been performed satisfactorily and the test engineer and QA/QC representatives have acknowledged correction of the variance on the variance report.

9.2.4.2 Test Initiation

The following conditions must be satisfied before starting any test

- a) All test plans and procedures for the test shall be available.
- b) All hardware and software engineering design change orders shall be incorporated into the system under test.
- c) All relevant documentation including drawings, lists of deliverables, and software functional and design documents, and user manuals shall be available.
- d) A complete regeneration of the software under test shall be performed immediately prior to the start of factory testing.

e) All operating system parameters, files, and configuration information shall be saved to archive media so that the AMI systems operating environment can be recreated starting with an un-initialized system. The existence and completeness of this data shall be demonstrable.

- f) All database, display, and report definitions shall be saved to archive media so that the databases, displays, and reports can be recreated if necessary.
- g) The image backup of all applications of AMI Systems shall be taken on the archive media so that AMI systems software can be regenerated if necessary.
- h) A complete dry run of each factory test (excluding the integrated system test) shall be conducted by the AMISP using the test plans and test procedures.

9.2.4.3 Test Completion

A test shall be deemed to be successfully completed only when:

- a) All variances have been resolved
- b) All test records have been documented and issued
- c) QA/QC acknowledges, in writing, successful completion of the test.

9.2.5 Factory Acceptance Test (FAT)

The factory tests shall be conducted on all the equipment to be supplied under the project. FAT¹ shall include, but not be limited to the following, appropriate to the equipment being tested:

- a) Verification of all functional characteristics and requirements specified.
- b) Inspection and verification of all construction, wiring, labelling, documentation and completeness of the hardware

Arrangements shall be made to carry out the tests for pluggable NIC modules integrated into three different meter makes, including the make(s) of meter being supplied by the AMISP. The slot for plugging the NIC modules in the meter shall conform to this specification. The FAT shall be carried out on the meter and/or DCU integrated with the NIC modules. If any on-line communication failover has been agreed between PFCCL/ Utility and the

¹ It is expected that the FAT for equipment supplies shall happen in phases of delivery. For this a test cum development system environment shall have to be created for the AMI system, with the HES, MDM and Database application servers installed in the target cloud data centre. This test / development system environment shall be separate from the production environment and shall continue to serve the purpose of development system beyond the FAT phase, for the total duration of the project

AMISP, tests shall be carried out to check a seamless failover of communication. The three makes of meters shall be checked with NIC modules for all type of communication technologies selected for the project.

Before the start of factory testing, the QA/QC Manager shall verify that all changes applicable to the equipment have been implemented type test certificates and Data Exchange Protocol Certificates (as per sampling criteria specified) are available. As a part of the factory tests, unstructured testing shall be performed to enable proper verification of operation of the equipment under conditions not specifically tested in the above structured performance test. All special test facilities used during the structured performance test shall be made available for use during unstructured testing. On the approval of the QA/QC Manager, The Project Manager of the AMISP to inform the schedule of FAT to PFCCL/ Utility as soon as finalised, with changes, if any. If the PFCCL/ Utility so desires, it may choose to witness the FAT at its own cost.

9.2.5.1 Factory Test Requirements

- a) The database displays and the report formats developed for the central system by the AMISP shall be demonstrated and verified at the start of factory testing.
- b) All Field Device, AMI functions, communication & networking systems as well as performance shall be tested and demonstrated.
- c) The AMISP shall also carry out testing of the standard protocol implementation for successful integration before the FAT starts.
- d) All hardware and software associated with AMI Systems shall be staged and completely tested with simulated data at the AMISP's facility.
- e) For smart meters, the FAT shall be governed by the Routine and Acceptance tests as laid out in IS 13779 and IS 14697.
- f) The Tests and Inspection Manager of the AMISP is responsible for conducting all factory tests.
- g) Each of the factory tests described below (i.e. Routine & Acceptance Test of Smart Meters, the hardware integration test, the functional performance test, and the integrated system test, unstructured tests) shall be carried out under factory test.

9.2.5.2 Sample Routine & Acceptance Tests for Smart Meters

These tests for Smart Meters are in addition to the Type Test requirements specified under clause 9.2.1 and the Routine and Acceptance tests that the AMISP will carry out as a part of their FAT procedure.

The sample Routine and Acceptance tests as per IS 13779 and IS 14697 shall be performed in a third-party accredited laboratory. The Utility shall have the authority of selecting the samples (in accordance with IS 13779 and IS 14697) for carrying out the Routine and Acceptance Tests. The AMISP shall be obliged to undertake these tests at their own cost. The conformity requirement shall follow IS 13779 and IS 14697 as the case may be.

9.2.5.3 Hardware Integration Test

The hardware integration test shall confirm that the computer hardware conforms to this Specification and the AMISP-supplied hardware documentation. The hardware integration test shall be performed when the computer hardware has been installed in the AMISP's factory. The operation of each item shall be verified as an integral part of the system. Applicable hardware diagnostics shall be used to verify that each hardware component is completely operational and assembled into a configuration capable of supporting software integration and factory testing of the system. Equipment expansion capability shall also be verified during the hardware integration test.

9.2.5.4 Functional Performance Test

The functional performance test shall completely verify all features of the AMI Systems hardware and software. This shall mean the suit of application software shall be made to run on the actual CSP infrastructure integrated with the field level hardware components, using selected communication paths. As a minimum, the following items shall be included in the functional performance test:

- a) Inspection of all equipment for conformance to drawings/document and satisfactory construction and appearance
- b) Testing of the proper functioning of all software, including test cases with normal and exception user-entered inputs and responses
- c) Simulation of local error and failure conditions
- d) Verification that ultimate expansion requirements are met
- e) Verification of data link interfaces with other Central systems
- f) Verification of Field Device communication interfaces (with failover if any) and data link interfaces with other central systems. This shall include the tests of three makes of meters with different types of NIC modules.

g) Simulation of Field Device and data link communication errors and channel failures, including incorrect check codes and random channel noise bursts

- h) Testing of all user interface functions, including random tests to verify correct database linkages
- i) Simulation of hardware failures and input power failures to verify the reaction of the system to server and device failure
- j) Demonstration of all features of the database, display, and report generators and all other software maintenance features. These shall include but not be limited to functional features like pre-payment calculations, billing determinants, tariff settings, energy audit, generation of NMS reports, data base maintenance functions etc
- k) Demonstration of the software utilities, libraries, and development tools
- I) Verification that the computer system meets or exceeds performance requirements
- m) Verification of the accuracy of hardware and software documentation via random tests
- n) Sample check of meter calibration accuracy and testing of spare parts.

9.2.5.5 Integrated System Test

The integrated system test shall verify the stability of the system hardware and software after the functional performance test has been successfully completed. During the integrated system test, all functions shall run concurrently and all AMISP-supplied equipment shall operate for a continuous 100-hour period. This minimum level of activity may be augmented, by other activities that represent normal day-to-day operation of the system as long as these activities are conducted in accordance with the documentation provided with the system. These other activities may include, but shall not be limited to, database, display, and report modifications, software development activities, configuration changes (including user-commanded server and device failovers), and the execution of any function described in this Specification.

The integrated system test shall ensure that the computer system is free of improper interactions between software and hardware while the system is operating as an integrated unit. In case during the 100-hour period testing, un-commanded functional restart or server or device fail occurs the test shall be extended by 24 hours each time such a failure over occurs. Further the test shall not be conducted with the failed device.

9.2.5.6 Unstructured Testing

Periods of unstructured testing shall be allocated to allow AMISP to verify proper operation of the systems under conditions not specifically included in the test procedures. Unstructured testing shall be conducted in compliance with the following conditions:

- a) A minimum of 25 percent of the actual test period shall be reserved for unstructured test of the system
- b) The AMISP's Tests & Inspection Manager along with the QA/QC representative shall be present during unstructured test periods
- All simulation software, test cases, and other test facilities used during the structured portions of the factory tests shall be available for use during unstructured testing
- d) Unstructured testing shall not begin prior to the start of the functional performance test
- e) Unstructured testing shall be allowed at the discretion of QA/QC Manager both at the end of a structured test segment and after completion of the functional performance test.

9.2.5.7 Dispatch of Material to Site

The Material Inspection Clearance Certificate (MICC) for all hardware shall be issued by PFCCL/ Utility only after successful completion of FAT as per specification. For this the QA/QC Manager of the AMISP is obliged to submit a comprehensive FAT clearance report to PFCCL/ Utility. At least 10 Field Devices for each protocol shall relate to each central system and the remaining Field devices shall be simulated in the factory test environment. The data exchange between central systems shall also be simulated in the factory test environment.

All Equipment Suppliers/OEMs to the project shall make use of categorised Interim Inspection Reports (CIP Clearance) from PFCCL/ Utility to ship materials to site after completion of FAT. CIP shall be issued by PFCCL/ Utility subject to specific FAT report carried out under the responsibility of the QA/QC Manager. Categorized Interim Inspection Report with the lowest category would mean a complete failure of FAT and hence rejection of material. A category between the lowest and the highest, shall mean pending actionable points of minor nature, but material deemed fit for dispatch to site. The category of CIP shall be authorised by the QA/QC Manager and issued by the Utility. In case where CIP is authorised by the QA/QC Manager with

the highest category (with no pending actionable points in FAT), PFCCL/Utility shall issue a Material Inspection Clearance Certificate (MICC).

9.3 Field Installation and Integration Test (FIIT)

Before the start of the FIIT, the following steps have to be completed:

a) Sample Routine & Acceptance Tests for Smart Meters

These tests for Smart Meters as specified in clause 9.2.5.2 may be repeated at the discretion of the Utility on lots received in the warehouse of the AMISP at site.

The sample Routine and Acceptance tests as per IS 13779 and IS 14697 shall be performed in a third-party accredited laboratory. The Utility shall have the authority of selecting the samples (in accordance with IS 13779 and IS 14697) for carrying out the Routine and Acceptance Tests. The AMISP shall be obliged to undertake these tests at their own cost. The conformity requirement shall follow IS 13779 and IS 14697 as the case may be.

- b) All field level hardware which has undergone FAT shall be installed at the site and the installation report signed off.
- c) Before the delivery of the first lot of field devices (meters/DCUs etc.),
 - a. The production hardware (servers, WS, LAN/Routers, FW, etc.) and software shall be provisioned at the cloud data centre.
 - b. The IT hardware shall be installed and made functional at the NOMC with requisite connectivity to the cloud data centre.
- d) The installed field hardware shall be configured and registered in the production environment of the cloud data centre.
- e) It shall be ensured that the smart meter deployment follows a contiguous area coverage plan. This is to mean for each installation of DT meter, attempt shall be made to prioritize deployment of all downstream consumer meters and for each installation of feeder meter, similar effort shall be made to prioritize deployment of all downstream DT/Boundary meters. However, this requirement of contiguous area coverage plan may exclude dispersed metering for certain industrial, commercial and government consumers at non-contiguous electrical locations as per the scope of work

It shall be the responsibility of the AMISP to devise the FIIT tests regime. The tests regime so developed shall be shared with PFCCL/ Utility at the time of submittal of the QA Plan. Any comments received from PFCCL/ Utility f shall be addressed within the FIIT. At the minimum the following tests shall be performed.

- a) Proper registration of the incoming population of field devices
- b) Checking of user interface linkages with database
- c) Remote configuration downloads and reading of profiles
- d) If required checking of new meter readings with existing meter readings.

- e) Forced event creation and communication of such events
- f) Performance tests of device communication links
- g) Device communication link failover
- h) Integration tests with the MDM in line with a use case table to be drawn up by the AMISP. A use case table is provided in Clause 2.4 of this Section for reference purpose

Appropriate notice shall be sent to PFCCL/ Utility by the QA/QC Manager before the start of the FIIT test regimes to enable PFCCL/ Utility to witness the same.

9.4 Site Acceptance Test (SAT)

Once the AMISP finalizes the SAT schedule, the QA/QC Manager shall invite PFCCL and Utility to witness the tests as per their convenience.

SAT shall be carried out with Smart Meters/DCUs in lots as these are delivered and passes through the Field Installation and Integration tests. The first lot to be subjected to SAT shall consist of the complete cloud data centre and its hardware and software components along with supply, installation & integration of a minimum of 5% Smart Meters/ DCUs (along with its related hardware and software equipment). The SAT for remaining meter population shall be staged on monthly basis based on the monthly supply, installation and integration of Smart Meters (along with its related hardware and software equipment).

The AMISP shall start up and check the performance of the equipment of field locations. All hardware shall be aligned and adjusted, interfaces to all inputs and outputs installed, operation verified, and all test readings recorded in accordance with the AMISP's recommended procedures. The SAT shall exhibit generally all functions of the equipment and duplicate factory test. All variances must be corrected prior to the start of the SAT. The list of final tests to be carried out in the field shall be listed in the site-testing document by the AMISP. Among others, the site testing document shall include the following minimum performance tests:

Data Type	Performance Requirement		
1. Load Profile Data Read ²			
One-month block load profile for installed meters	From 98% of the meters in 12		
One-month block load profile for installed meters	hours after the midnight		
2. Billing Profile Data Read ³			
Billing profile data for installed meters	From 98% of the meters in 12		
billing profile data for installed meters	hours after the midnight		
3. On-Demand Remote reads of meters			
Collection of 7 days of interval energy data and the current total accumulated energy from a selected individual meter	From 90% of the meters in 2 minutes		

² This performance test shall be done during SAT, from second lot of meters onwards

³ This performance test shall be done during SAT, from second lot of meters onwards

Data Type	Performance Requirement			
4. Remote connect / disconnect				
Action to response for individual meter	Less than 3 mins			
5. Updating of data on consumer portal/ app				
Updating of individual consumer data on portal/ app after receiving the data in MDM	Action performed for active on portal consumers within 5 minutes after receiving the data in MDM			
6. Ping Response with acknowledgement/ response for se	lected meters			
For installed meters	Action performed at 99.9% of meters within 1 minute; and			
For an individual meter	Action performed within 3 seconds			
7. Meter loss and restoration of supply				
Receiving of alert for all affected AMI meters	Alert to be received within 3 minutes for 60% of meters			
8. Meter Tamper Alerts				
Receiving of alert for an individual meter	Alert to be received within 3 minutes			
9. Power Quality Alerts				
Receiving of alert for an individual meter	Alert to be received within 5 minutes			
10. Firmware upgrade with acknowledgement/ response for selected meters				
For installed AMI meters	Action performed at 99% of meters within 1 hour; and			
T of installed 7 livil meters	Action performed at 99.9% of meters within 2 hours			
11. Remotely altering settings in meter				
For installed AMI meters	Action performed at 99% of meters within 30 minutes; and			
	Action performed at 99.9% of meters within 1 hour			
12. Remotely read events logs				
For reading the full event log for installed AMI meter	Action performed at 90% of meters within 30 minutes; and			

Data Type	Performance Requirement		
	Action performed at 99% of		
	meters within 1 hour; and		
	Action performed at 99.9% of		
	meters within 6 hours.		
13. VEE processing			
For all installed meters	Action performed in 15 mins		
14. Computation of Billing Determinants			
For all installed meters	Action performed in 2 hours		
15. Prepaid Recharge			
Payment success to consumer acknowledgement	Within 5 mins		
Payment success to meter update	Within one hour		
16. Utility User Interface			
Manual data entry of new value appears on screen	Less than 6 secs		
Acknowledgement of any action request	Within 3 secs		
Display update rate	2 secs		
17. Disaster Recovery Capability (Refer to Clause 2.7.3.3.9 of Schedule A of this Section for details)			
Recovery Time Objective (RTO)	4 hours as agreed		
Recovery Point Objective (RPO)	2 hours as agreed		
18. On-Demand Remote reads of meters			
Collection of 7 days interval energy data and the current total	Action performed		
accumulated energy from a group of 10% of installed base of	within 2 hours		
meters (configurable)	Within 2 nours		

Interim inspection reports shall be generated if the SAT is unsuccessful at any stage and all variances shall have to be corrected and recorded. On successful completion of each lot of SAT a clear SAT Report shall be issued for the benefit of PFCCL/ Utility. These SAT reports shall be signed by both the Inspection and Tests Manager and the QA/QC Manager.

9.5 System Availability Test

QA/QC Manager will be responsible for oversight of the conduct of the availability test. The test shall consist of normal AMI Systems operations without special test equipment or procedures.

Test records defined in the availability test plan and procedures will be maintained by QA/QC Manager. AMISP will operate and maintain the system according to procedures described in the AMISP documentation. QA/QC Manager shall raise incident reports for every incident that is encountered and closed with response time, resolution time and hold times.

AMI systems maintenance on an on-call basis shall be provided by the AMISP during the availability test period. When on-site maintenance support is needed, qualified AMISP personnel shall arrive at the site within maximum four (4) hours of notification and shall keep records of the progress in problem resolution. For availability purposes, this service response time and the associated on-site maintenance time shall be taken into account as defined in sections of "Downtime" and "Hold time".

The AMISP shall maintain an inventory of spare parts, which may be required to achieve the specified availability. These spares shall be in addition to the mandatory spares. All spare parts used during the availability test shall be drawn from AMISP's inventory.

9.5.1 Downtime

Downtime occurs whenever the criteria for successful operation defined in Clause 9.6.1 of this Section are not satisfied. Downtime shall be measured from the start of diagnostic procedures until full service is restored. In the event of multiple failures, the total elapsed time for repair of all problems (regardless of the number of maintenance personnel available) shall be counted as downtime. For onsite response the delay in response time (more than four hours) shall be added to downtime.

9.5.2 Hold time

During the availability test, certain contingencies may occur that are beyond the control of any stake holder. These contingencies may prevent successful operation of the system but are not necessarily valid for the purpose of measuring AMI systems availability. Such periods of unsuccessful operation may be declared "hold time". Specific instances of hold time contingencies are:

- a) Scheduled Shutdown: During scheduled shutdowns, or if an equipment failure occurs while its backup device is scheduled out-of-service, the resulting system outage shall be hold time, provided that service can be restored according to AMISP-specified procedures within 30 minutes.
- b) Power Interruption and Environmental Excursion: Loss of power or manual shutdown in the event of loss of environmental control shall be considered hold time. If the system is operated during periods of power or environmental conditions beyond those specified, any resultant downtime shall also be considered hold time.
- c) Intermittent Failure: Periods during which an intermittent, recurring software or hardware failure is experienced will be considered hold time, provided that the AMISP is engaged in remedial action and normal functions can be restored by AMISP-defined procedures whenever the

failure occurs. Instead of accounting for the actual intermittent downtime, one hour of downtime shall be counted for each 24 hours of otherwise successful operation while the problem persists.

- d) **Service Response Time:** A maximum four (4) hours of hold time will be allowed for the AMISP to respond to each call for maintenance support.
- e) **Corrected Design Defect**: Hold time may be declared to ensure against similar future occurrences if a failure occurs due to a defect in system design for which the AMISP defines and implements corrective measures. In such a case, hold time shall be allowed in increments of 24 hours to allow verification of the corrective action.

9.5.3 Test Duration and Criteria for Acceptance

After the elapse of 120 hours of cumulative test time, the availability shall be calculated. Should availability falls short of specified percentage as defined in Clause 9.6.1 of this Section, the AMISP may either (a) Continue the test by moving the starting time of the test forward and continuing the test until the consecutive hours have been accumulated and the specified availability has been achieved subject to maximum of 5 days, Or (b) the AMISP may restart the test for 120 hours.

To establish that all failures have been satisfactorily repaired prior to the end of the availability test, no downtime, intermittent (hold time) failures, or more than one un-commanded fail over shall have occurred within 48 hours of the test's conclusion.

9.5.3.1 Criteria for successful operation

The AMI system shall be designed to meet the system availability as defined below:

S.No.	System	Minimum System Availability Requirements
1.	Smart Meters	99.5%
2.	DCU/ AP	99.5%
3.	MDM	99.5%
4.	HES	99.5%
5.	NOMC Hardware such as UPS, Router, etc.	99.5%
6.	Utility and Consumer User Interface	99.5%

The total operational time shall not include the hold time. The system shall be considered available as long as all the requirements defined under Clause 9.5 are available.

9.6 Operational Go Live

9.6.1 Conditions to Be Met for Operational Go Live

The Operational Go Live of the AMI system shall be considered as completion of the SAT for 5% or 25,000 of Smart Meters whichever is less (along with its related hardware and software equipment) supplied installed and integrated. AMISP's obligations for Operational Go Live of the system shall be deemed to be met when the following milestones are achieved:

- a) Completion of training obligations pre-Operational Go-Live;
- b) Supply, installation & integration of 5% or 25,000 of Smart Meters of the respective project as per the definition of Go-Live/ UAT specified therein whichever is less (along with its related hardware and software equipment);
- c) Successful completion of SAT for the quantity of Smart Meters as mentioned in serial no (b) above;
- d) Successful completion of system availability test for 120 (one hundred twenty) hour. This shall be conducted on supplied systems under normal day-to-day operating conditions. The test shall verify the reliability and integrity of the Field devices, Central Systems, Communication & networking systems, database, displays, report, and all communication interfaces.
- e) Independent third-party cyber security audit

The Availability Test mentioned in Clause 9.6.1 (d) is meant for the initial supply as mentioned in Clause 9.6.1 (b). For the subsequent lots of Smart Meters along with associated equipment, only up to SAT will be required for operationalizing the lot.

9.6.2 Certification of Operational Go Live

Following the successful completion of System Availability Tests as per Clause 9.5 of this Section, the AMISP has to submit the following documentation to the Utility Project Manager:

- a. Utility certification of training obligations pre-Operational Go-Live
- b. SAT and resolved variance reports of initial installation phase co-signed by QA/QC Manager and the Inspection and Test Manager
- c. Availability and resolved incident reports of System Availability Test signed by QA/QC Manager
- d. Initial third-party Cyber Security Audit Report

Based on these submittals the utility shall check for the completeness and accuracy of the submittals and issue Operational Go Live certificate to the AMISP in not more than 3 days from the date of submittal. Commercial operation shall be effective from the date mentioned in this certificate.

10. Project Management

Prior to AMI Project Implementation, the AMISP will prepare and submit a detailed project implementation plan, in consultation with PFCCL/ Utility, to ensure smooth takeover of existing Utility systems and any ongoing services under the scope of the AMI Project.

10.1 Project Implementation Plan would cover the following:

- i. Understanding of Utility and its requirement with respect to Project implementation;
- ii. Overall system architecture and system philosophy capable of scale-up;
- iii. Details of proposed methodology;
- iv. Schematic Diagram of Proposed System Configuration
- v. Strategy for deployment of feeder-wise smart meters and communication infrastructure
- vi. Detailed bill of quantities for materials and services (including any special equipment) necessary to meet the technical specifications, functional & performance requirements
- vii. An approach paper documenting the interfaces for integration with existing and future applications based on the information provided by utility
- viii. Project team structure;
- ix. Line of Credit / Source of funding and supporting documents;
- x. Governance framework;
- xi. Resource planning and estimation;
- xii. Risk planning;
- xiii. Quality Assurance/ Quality Control of the Program (including Testing and Inspection);
- xiv. Data Privacy Approach
- xv. Cyber Security Approach;
- xvi. Site Survey result;
- xvii. Documents, Data Requirement Sheet, Drawing submission and approval;
- xviii. Installation & Field update schedule;
- xix. Repair and Maintenance Schedule including details on Spares Management;
- xx. Training schedule;

10.2 Key Personnel

The AMISP shall appoint at least the following personnel dedicated for the AMI Project

a) Project Manager: She / he shall have the authority to make commitments and decisions that are binding on the AMISP. PFCCL/ Utility will designate a Nodal officer to coordinate all project activities. All communications between PFCCL/

Utility and the AMISP shall be coordinated through the project manager and nodal officer. The project manager should be an expert in AMI Implementation including metering and related aspects, installation and management of Smart Meters, communication network, last mile connectivity, HES and MDM. The project managers shall be responsible for all communications between other members of the project staffs including sub-contractors, if any.

- b) **System Integration Expert:** An expert in System Integration covering application software, hardware and network installation, integration design and ability to manage multiple partners with different skill sets in different technology domains.
- c) **Cyber Security Expert:** An expert in cyber security related aspects covering planning and implementing high level system security requirements, managing data privacy and confidentiality, information flow through adequate authorizations, threat modelling and security testing
- d) **Communication Protocol Expert:** An expert in communication protocols and in implementing applications using different communication technologies and ensuring communication inter-operability across applications/functionalities

The project manager shall be responsible for bringing in the Cyber Security expert and Communication Protocols expert at the appropriate stage in the project as and when required.

10.3 Progress Report

A progress report shall be prepared by the AMISP for each month against the activities listed in the project schedule. The report shall be made available to PFCCL/ Utility on a monthly basis on a mutually agreed schedule, e.g., the 5th day of each month. The progress report shall include all the completed, ongoing and scheduled activities and transmittals issued and received for the month. The progress report will also highlight the risks to the project and plan for risk mitigation.

10.4 Transmittals

Every document, letter, progress report, change order, and any other written transmissions exchanged between the AMISP and PFCCL/ Utility shall be assigned a unique transmittal number. The AMISP shall maintain a correspondence index and assign transmittal numbers consecutively for all AMISP documents. PFCCL/ Utility will maintain a similar correspondence numbering scheme identifying documents and correspondence that PFCCL/ Utility initiates.

10.5 Review Meeting

Progress meetings shall be scheduled by PFCCL/ Utility and attended by the AMISP each reporting period to review progress of the project. Progress meetings shall be used to review the progress report, written correspondence exchanged since the last meeting, and open action items. The review meeting will also be used to discuss upcoming milestones, support needed from the PFCCL/ Utility, risk identified by the Program team, risk mitigation strategies and to make decisions for path forward.

The AMISP shall also attend technical meetings as and when required by the PFCCL/ Utility to discuss technical aspects of the project and to review PFCCL/ Utility comments on documents. When appropriate, these technical meetings shall be conducted as extensions to the progress meetings.

10.6 Document Review and Approval Rights

To ensure that the proposed systems conform to the specific provisions and general intent of the Specification, the AMISP shall submit documentation describing the systems to PFCCL/ Utility for review and approval.

PFCCL/ Utility will respond with written comments to the AMISP within Fifteen (15) calendar days after receipt of the documents. Documents requiring correction must be resubmitted by the AMISP to PFCCL/ Utility within fifteen (15) calendar days. PFCCL/ Utility will respond to resubmitted documents within seven (7) calendar days after receipt of the document. No Project Implementation Schedule relief is to be implied for documents requiring correction and resubmission to PFCCL/ Utility.

PFCCL/ Utility shall have the right to require the AMISP to make any necessary documentation changes at no additional cost to PFCCL/ Utility to achieve conformance with the Specification.

To help PFCCL/ Utility manage the review and approval of documents during any given period, the AMISP shall stagger the release of documents over the time allocated in the project schedule. The number and size of documents shall be factored into the document release schedule.

11. Document Requirements

List of documents to be provided by the AMSIP to PFCCL/ Utility over the entire Contract period has been provided below. The timelines for submission along with requirement of PFCCL/ Utility approval (if required) have also been provided herewith:

S.	Documentation to be submitted	Frequency	Purpose ⁴	
No.	Pre-Operational Go-Live Phase (from the o	•	•	
	Contract till the date of achievement of the Operational Go-Live of the			
	AMI system)			
1	A checklist of all documents on which approvals	Once	I	
	from utility or other agencies may be required;			
2	Consumer engagement plan;	Once	l	
3	Detailed Project Implementation Plan including verification of all integrations with external	Once	А	
	systems as mentioned in this Contract and			
	delineated in the approach paper created for			
	the purpose			
4	Exit Management Plan	Once	Α	
5	Document/ drawings to indicate the following:	Once	I	
	i. Tentative location of devices/equipment for			
	setting up communication network with			
	power plan;			
	ii. Confirmation of adequacy of space and AC			
	power supply requirements.			
	iii. Additional items required for interconnection			
	with the existing/owner provided			
	equipment/facilities;			
	iv. Requirement of modification to existing			
	earthing arrangement of NOMC and			
	locations where communication equipment /			
	devices etc. are to be installed, if any.			
6	As-Built Drawings	Updated	I	
7	Quality Assurance Plan including the test plans	Once	Α	
	for each stage of Testing.			
8	Type test reports	Once	l	
9	Data Exchange Protocol Test Certificate [one	Once	I	
10	per one lakh] smart meters Consumer indexing as per the implemented	Undated	I	
10	Consumer indexing as per the implemented Updated I AMI system			
11	Notice to PFCCL/ Utility to witness Factory	Periodic		

⁴ I: Informational, no approval required from Utility, **A**: Approval required from Utility based on signed documents submitted by AMISP,

	Acceptance Test			
12	Factory Acceptance Test Reports with category	Periodic	ı	
	if any	. Gridaid		
13	Notice to PFCCL/ Utility to witness Field	Once	I	
	Installation and Integration Test			
14	Field Installation and Integration Test Reports	Once	I	
15	Notice to Utility to witness Site Acceptance	Periodic	I	
	Tests			
16	Site Acceptance Test Reports	Periodic	I	
17	Progress report briefing the status of installation Monthly I			
	of meters and key challenges faced if any			
18				
	Test			
19	System Availability Test	Once	l l	
20	Certification for Operational Go Live with	Once	Α	
	following documentation:			
	i. SAT & resolved Variance Reports			
	ii. Availability & resolved incident Reports			
	iii. Completion of Training certificate			
	iv. Third party Cyber Security Audit			
	v. Document detailing security algorithm and			
	security key generation method			
	, , ,			
В	Post-Operational Go-Live Phase (after the O		ive of the	
	Post-Operational Go-Live Phase (after the O	ract Period)	ive of the	
B	Post-Operational Go-Live Phase (after the O AMI system till the end of Cont Monthly progress report briefing the status of		ive of the	
	Post-Operational Go-Live Phase (after the O AMI system till the end of Cont Monthly progress report briefing the status of installation of meters and key challenges faced	ract Period)	ive of the	
1	Post-Operational Go-Live Phase (after the O AMI system till the end of Cont Monthly progress report briefing the status of installation of meters and key challenges faced if any	Monthly	I	
	Post-Operational Go-Live Phase (after the O AMI system till the end of Cont Monthly progress report briefing the status of installation of meters and key challenges faced if any Reports as mentioned in this Contract which	ract Period)	ive of the	
1	Post-Operational Go-Live Phase (after the O AMI system till the end of Cont Monthly progress report briefing the status of installation of meters and key challenges faced if any Reports as mentioned in this Contract which includes but not limited to the following:	Monthly	I	
1	Post-Operational Go-Live Phase (after the O AMI system till the end of Cont Monthly progress report briefing the status of installation of meters and key challenges faced if any Reports as mentioned in this Contract which includes but not limited to the following: i. Service Level Agreement (SLA)	Monthly	I	
1	Post-Operational Go-Live Phase (after the O AMI system till the end of Cont Monthly progress report briefing the status of installation of meters and key challenges faced if any Reports as mentioned in this Contract which includes but not limited to the following: i. Service Level Agreement (SLA) performance report;	Monthly	I	
1	Post-Operational Go-Live Phase (after the O AMI system till the end of Cont Monthly progress report briefing the status of installation of meters and key challenges faced if any Reports as mentioned in this Contract which includes but not limited to the following: i. Service Level Agreement (SLA) performance report; ii. Monthly progress report including problems	Monthly	I	
1	Post-Operational Go-Live Phase (after the O AMI system till the end of Cont Monthly progress report briefing the status of installation of meters and key challenges faced if any Reports as mentioned in this Contract which includes but not limited to the following: i. Service Level Agreement (SLA) performance report; ii. Monthly progress report including problems that arise with the installed AMI system (if	Monthly	I	
1	Post-Operational Go-Live Phase (after the O AMI system till the end of Cont Monthly progress report briefing the status of installation of meters and key challenges faced if any Reports as mentioned in this Contract which includes but not limited to the following: i. Service Level Agreement (SLA) performance report; ii. Monthly progress report including problems that arise with the installed AMI system (if any) including any cyber security related	Monthly	I	
1	Post-Operational Go-Live Phase (after the O AMI system till the end of Cont Monthly progress report briefing the status of installation of meters and key challenges faced if any Reports as mentioned in this Contract which includes but not limited to the following: i. Service Level Agreement (SLA) performance report; ii. Monthly progress report including problems that arise with the installed AMI system (if any) including any cyber security related issues and corrective action taken by AMISP	Monthly	I	
1	Post-Operational Go-Live Phase (after the O AMI system till the end of Cont Monthly progress report briefing the status of installation of meters and key challenges faced if any Reports as mentioned in this Contract which includes but not limited to the following: i. Service Level Agreement (SLA) performance report; ii. Monthly progress report including problems that arise with the installed AMI system (if any) including any cyber security related issues and corrective action taken by AMISP for the same.	Monthly Monthly	I	
1	Post-Operational Go-Live Phase (after the O AMI system till the end of Cont Monthly progress report briefing the status of installation of meters and key challenges faced if any Reports as mentioned in this Contract which includes but not limited to the following: i. Service Level Agreement (SLA) performance report; ii. Monthly progress report including problems that arise with the installed AMI system (if any) including any cyber security related issues and corrective action taken by AMISP for the same. iii. Reports mentioned in Clause 6 of Section 6;	Monthly Monthly Monthly	I	
1	Post-Operational Go-Live Phase (after the O AMI system till the end of Cont Monthly progress report briefing the status of installation of meters and key challenges faced if any Reports as mentioned in this Contract which includes but not limited to the following: i. Service Level Agreement (SLA) performance report; ii. Monthly progress report including problems that arise with the installed AMI system (if any) including any cyber security related issues and corrective action taken by AMISP for the same. iii. Reports mentioned in Clause 6 of Section 6; iv. Cyber Security Audit	Monthly Monthly Monthly Monthly Yearly	I	
1	Post-Operational Go-Live Phase (after the O AMI system till the end of Cont Monthly progress report briefing the status of installation of meters and key challenges faced if any Reports as mentioned in this Contract which includes but not limited to the following: i. Service Level Agreement (SLA) performance report; ii. Monthly progress report including problems that arise with the installed AMI system (if any) including any cyber security related issues and corrective action taken by AMISP for the same. iii. Reports mentioned in Clause 6 of Section 6; iv. Cyber Security Audit v. Data Privacy Audit report;	Monthly Monthly Monthly Monthly Yearly Yearly	I	
1	Post-Operational Go-Live Phase (after the O AMI system till the end of Cont Monthly progress report briefing the status of installation of meters and key challenges faced if any Reports as mentioned in this Contract which includes but not limited to the following: i. Service Level Agreement (SLA) performance report; ii. Monthly progress report including problems that arise with the installed AMI system (if any) including any cyber security related issues and corrective action taken by AMISP for the same. iii. Reports mentioned in Clause 6 of Section 6; iv. Cyber Security Audit	Monthly Monthly Monthly Monthly Yearly	I	
2 3 4	Post-Operational Go-Live Phase (after the O AMI system till the end of Cont Monthly progress report briefing the status of installation of meters and key challenges faced if any Reports as mentioned in this Contract which includes but not limited to the following: i. Service Level Agreement (SLA) performance report; ii. Monthly progress report including problems that arise with the installed AMI system (if any) including any cyber security related issues and corrective action taken by AMISP for the same. iii. Reports mentioned in Clause 6 of Section 6; iv. Cyber Security Audit v. Data Privacy Audit report; Change Requests / Change Notes Change Orders	Monthly Monthly Monthly Monthly Yearly Yearly Periodic Yearly	A I I I	
2	Post-Operational Go-Live Phase (after the O AMI system till the end of Cont Monthly progress report briefing the status of installation of meters and key challenges faced if any Reports as mentioned in this Contract which includes but not limited to the following: i. Service Level Agreement (SLA) performance report; ii. Monthly progress report including problems that arise with the installed AMI system (if any) including any cyber security related issues and corrective action taken by AMISP for the same. iii. Reports mentioned in Clause 6 of Section 6; iv. Cyber Security Audit v. Data Privacy Audit report; Change Requests / Change Notes	Monthly Monthly Monthly Monthly Yearly Yearly Periodic	I I I A	

12. Project Implementation Schedule

The Project Implementation Schedule for AMI system establishment and timelines for Related Services milestones from date of execution of the Contract are given below:

S.No.	Milestone	Timeline (in months)
1	Submission of detailed Project Implementation Plan giving the compliance sheet along with the make and model of various infrastructure, hardware & software that are proposed for	Within 15 days from the date of execution of the Contract
	delivery and operations incl.:Specification of SystemArchitecture and Software Solution	
2	Approval of detailed Project Implementation Plan by PFCCL and Utility	Within 15 days from the date of submission of Project Implementation Plan.
3	Delivery, site installation, integration and operationalization of 100% of Feeder Meters each with related hardware, software and equipment	Within 2 months from the date of execution of the Contract
4	 Delivery, site installation and commissioning of Network Operations cum Monitoring Centre with related hardware, software and equipment; and Delivery, site installation, integration and operationalization of 5% of Smart Meters each with related hardware, software and equipment and successful operational go-live 	Within 2 months from the date of execution of the Contract
5	Delivery, site installation, integration and operationalization of 50% of Smart Meters each with related hardware, software and equipment	Within 6 months from the date of execution of the Contract
6	Installation Milestone	Within 10 months from the date of execution of the Contract
7	Certification of Installation Milestone in accordance with the provisions of this Contract by PFCCL and Utility	Within 15 days from the date of Installation Milestone.
8	Operational period of the AMI system	From Operational Go-Live till end of the Contract Period
9	Transfer of AMI system	At the end of Term of the Contract in accordance with Exit Management Plan provided in Article 11.6 of GCC in Section 7

Installation Milestone

The "Installation Milestone" is defined as the milestone when installation and operationalization is completed for the number of smart meters envisaged for the project. The AMISP is expected to complete this Installation Milestone as per the table given above. The number of smart meters envisaged may change through negative variations

provided for in the Contract as mentioned in Article 14 given in Section 7. If the AMISP completes the "Installation Milestone" ahead of schedule, then the revised date shall be accepted as the date of achievement of "Installation Milestone".

In accordance with Clause 1.15 (w) of Schedule A of this Section, PFCCL/ Utility shall provide necessary clearance/ approval/ permits that are to be issued by it for initial 20% of contiguous electrical locations for Smart Meter deployment along with related documentation within 2 (two) months from date of execution of this Contract.

Furthermore, PFCCL/ Utility shall provide necessary clearance/ approval/ permits to be issued by it for remaining contiguous electrical locations as well as non-contiguous area for Smart Meter deployment along with related documentation on quarterly basis. PFCCL/ Utility shall endeavour to provide 20% of contiguous electrical locations cleared each quarter and complete area within 18 (eighteen) months from date of execution of the Contract. PFCCL/ Utility shall issue a Notice no later than 7 days of expiry of time period specified above confirming the actual number of meters for which clearance/ approval/ permits is available. If PFCCL/ Utility fails to issue the necessary clearance and approvals or if PFCCL/ Utility acknowledges that no further consumer/feeder locations are available for deployment within the allotted time, then the meter population for which clearance/ approval/ permits is available shall be assumed as the number required for meeting the "Installation Milestone".

As and when the "Installation Milestone" is achieved by the AMISP, PFCCL/ Utility shall be obliged to certify the milestone through a written communication giving the date and the meter population installed and operationalised.

13. Annexures

Annexure A Technical Specifications for Whole Current A.C. Single Phase Smart Energy Meter

Scope

These specifications cover the design, manufacturing, testing, supply and delivery of AC whole current, single phase, 2 wires Smart Energy Meter with bidirectional communication facility & remote connect/disconnect switch. The meter shall communicate with Head End System (HES) on any one of the communication technologies mentioned in IS16444 Part 1, as per the requirement of the utility.

Basic Features

The Smart Meter would have the following minimum basic features-

- Measurement of electrical energy parameters
- Bidirectional Communication
- Integrated Load limiting /connect/disconnect switch
- Tamper event detection, recording and reporting
- Power event alarms as per IS 16444 Part 1
- Remote firmware upgrade
- Pre-paid features at MDM end (as per IS 15959 Part 2)
- TOD features
- Net Metering(kWh) features (optional as per requirement of utility)
- On demand reading

General standards applicable for meters

S. No.	Standard No.	Title
1	IS 13779 with latest amendments	AC Static Watt-hour Meter class 1& 2
2	IS 15884 with latest amendments	Alternating Current Direct Connected Static Prepayment Meters for Active Energy (Class 1 and 2)-
3	IS 16444 Part 1 with latest amendments	A.C. Static Direct Connected Watt Hour Smart Meter Class 1 and 2- Specification
4	IS 15959 Part 1 & Part 2 with latest amendments	Data Exchange for Electricity Meter Reading, Tariff and Load Control-Companion Standards

Communication

Meter shall have the ability to communicate with Head End System (HES) on any one of the communication technologies mentioned in IS16444 Part 1 (RF/PLCC /Cellular) in a secure manner. The selection of communication technology should be as per the site conditions and as per design consideration of AMI Implementing agency to meet the performance as per agreed Service Level Agreements (SLAs). In case of Cellular based meter, the meter shall accommodate SIM card/ e-SIM of any service provider. The meter shall log the removal of the plug-in type communication module removal /nonresponsive event with snapshot.

Remote connect/disconnect/load limiting: Remote Connect/disconnect/Load control facilities would be as per IS 16444 part 1.

Other Specifications

Features	Minimum Requirement of Features
Applicable Standards	The meters shall comply with IS 16444 Part 1 for all requirements.
Reference Voltage	As per relevant IS (240 V)
Current Rating	5-30 A
Category	UC1
Starting Current	As per IS 16444 Part 1
Accuracy	Class 1.0 as per IS 16444 Part 1
Limits of error	As per IS 16444 Part 1
Operating Temperature range	As per IS 13779
Humidity	As per IS 13779
Frequency	As per IS 16444 Part 1
Influence Quantities	As per IS 16444 Part 1
Power Consumption of meter	As per IS 16444 Part 1
Current and Voltage Circuit	As per IS 16444 Part 1
Running at No Load	As per IS 16444 Part 1
Test output device	As per IS 16444 Part 1
Meter Display	As per IS 16444 Part 1
Name Plate & marking Meter Display	As per IS 16444 Part 1
Parameters to be measured	As per IS 16444 Part 1 / As per IS 15959 Part-2
Maximum Demand resetting	As per IS 15959 Part 2
Time of Use registers	As per IS 15959 part 2
Power Quality Information	As per IS 15959 part 2
LED/LCD Indicators	As per IS 16444 Part 1
Load Survey/Interval Data	As per IS 15959 part 2
Tamper/ Event Recording	As per IS 15959 part 2
Measuring Elements	As per IS 16444 part 1
Alarm	As per IS 16444 Part 1/ 15959 Part 2
Load Control	As per IS 16444 Part 1
Connect/Disconnect switch	UC1 (As per IS 16444 part 1)
Status of load switch	As per IS 16444 Part 1

Features Minimum Requirement of Features Programmability As per IS 16444 Part 1 Communication As per IS 16444. Part 1 **Data Exchange Protocol** As per IS 16444 Part 1 Remote Firmware upgrade As per IS 15959 part 2 Real Time Clock (RTC) As per IS 16444 Part 1/ IS 15959 Part1 & Part 2 Data Retention As per IS 16444 Part 1 **Battery Backup** Meter shall be supplied with separate battery backup for RTC. First Breath (power on) and Last gasp As per IS 16444 Part 1 (power off) condition detection and communication to HES Plug-in Communication Module The Smart Meters shall have a dedicated sealable slot for accommodating plug-in type bi directional communication module which shall integrate the respective communication technology (RF/PLCC/Cellular) with the Smart Meters, leading to easy adaptability for network interfaces (WAN/NAN). The Plug-In module shall be field swappable/ replaceable.

Data display facility (auto/manual)

As per IS 16444. However minimum requirement should include the following:

Data Display shall be in two modes-

- Auto Scroll
- Scroll with Push Button

The display parameters shall be:

- Auto Scroll
 - Display Check
 - Date and Time
 - Last Recharge Amount
 - Last Recharge Time
 - Current Balance Amount
 - Current Balance days left
 - Cumulative Active Energy kWh with legend.
 - Current calendar month MD in kW with legend.
 - Instantaneous voltage
 - Instantaneous Phase current
 - Instantaneous Load kW
 - Instantaneous average Power Factor

These parameters should be displayed on the Meter Display continuously for a period of 10 seconds on Auto scroll.

Scroll with Push-button

All Parameters mentioned under Auto-Scroll mode should be displayed. Additionally, the following Parameters shall also be displayed:

- Internal diagnostics (display check)
- Meter Serial No.
- · Last month cumulative kWh with legends
- Last month MD in kW with legends
- Current month Average Power Factor
- Last month Average Power Factor

Further, the Meter should display high resolution energy values with resolution of 2 digits before decimal and 3 digits after decimal in push button mode

The meter's display should return to default display mode (continues auto scroll) if push button is not operated for more than 10 seconds. (The order of display may be revised as per requirement of the utility). Meter display should go into the sleep mode during Power-On condition in case the push button is not operated for more than 10 minutes.

Anti-tamper features

The meter shall continue working under tamper conditions as defined in IS 15959 Part 2 and would log the event and send alarm at Head End System after detection of the defined tamper features as per IS 15959 Part 2.

Type Tests & Test Certificates

Smart Meter shall be type tested for all the tests as per relevant parts of IS 16444 (latest versions), and certified by Indian Standard wise list of BIS recognized labs as available at https://bis.gov.in/index.php/laboratorys/list-of-bis-recognized-lab/. The number of sampling for testing of meters and criteria for conformity would be as per IS 16444 (as amended up to date). Necessary copies of test certificates shall be submitted as per agreement with the utility.

Routine & Acceptance Tests

The Factory Acceptance and Routine tests shall be carried out as per IS 16444 Part 1.

General & Constructional requirements

Meter shall be BIS marked as per IS 16444 Part 1. General & construction requirement shall be as per IS 16444/IS 13779

Meter base & cover - Meter base & cover shall be as per IS 16444 Part1 / IS 13779. The meter Base & cover shall be 'Break to open' design. The material for meter base and cover shall be made of high-grade polycarbonate.

The meter Base & cover shall be ultrasonically welded / Chemically welded or other suitable bonding technology and it will not be possible to remove the cover from the base without evidence of damage

Terminal block & cover - As per IS 16444 Part 1/IS 13779

Design

Voltage circuit, sealing arrangement, terminal block, terminal cover and nameplate etc. shall be in accordance with IS-16444 Part 1(latest version).

The meter shall be compact and reliable in design, easy to transport and immune to vibration and shock involved in transportation and handling.

Name plate and marking

The name plate on the meter should be clearly visible, effectively secured against removal and indelibly/distinctly marked in accordance with relevant IS. In addition, "Name of the Utility", purchase order no. & year/month of manufacturing shall be provided on the name plate. The rating plate information shall be as per relevant IS.

Connection diagram: As per IS 16444 Part 1

Fixing arrangements

The meter shall be mounted type. The Meter should have three fixing holes, one at top and two at the bottom. The Top hole should be such that the holding screw is not accessible to the consumer after fixing the meters. The lower screws should be provided under sealable terminal cover.

Sealing arrangement:

Arrangements shall be provided for proper sealing of the meter cover so that access to the working parts shall not be possible without breaking the seal. The sealing arrangement and number of seals shall be as per relevant IS/ requirement of utility.

Meter box:

The Meter Box if required by utility/purchaser, would be provided as per requirement of the utility/ purchaser and the material of the Meter Box should be such that it does not hamper communications.

Packing

The meters shall be suitably packed for vertical/horizontal support to withstand handling during transportation. The meter shall be packed appropriately to ensure safe transportation, handling, identification and storage. All packing materials shall be as per environment law in force. The primary packing shall ensure protection against humidity, dust, grease and safeguard the meter's performance until its installation. The secondary packing shall provide protection during transportation. The packing case shall indicate "Fragile in nature" and direction of placement of box. The packing shall indicate marking details like Manufacturer's name, S.No. of meters, quantity etc.

Transportation

 The meter shall be compact in design. The meter block unit shall be capable of withstanding stresses likely to occur in actual service and rough handling during transportation.

- The meter shall be convenient to transport and immune to shock and vibration during transportation and handling.
- The meter should not be exposed to undue shock and mishandling during transportation.
- The stacking of box inside transport media should be such as to avoid their free movement.
- The packing should also be protected from rain and dust by transport media.
- The AMISP shall be responsible for any damage during transit due to inadequate or improper packing.

Testing and Manufacturing Facilities at Manufacturer's Place

The manufacturer shall have facilities of conducting Acceptance Testing as per IS 16444 Part 1.

Inspection

- The meters shall be sealed as per the mutual agreement of the supplier and the purchaser
- Utility/ PFCCL may inspect the meter randomly as per sampling plan for acceptance test as per IS 16444 Part 1. The meters shall be tested for acceptance test as per IS 16444 Part 1

Annexure B Technical Specifications for Whole Current A.C. Three Phase Smart Energy Meter

Scope

The specification covers the design, manufacturing, testing, supply and delivery of AC whole current 3 phase 4 wires Smart Energy Meter with bidirectional communication facility suitable for Advanced Metering Infrastructure (AMI) with connect/disconnect switch. The meter shall communicate with Head End System (HES) on any one of the communication technologies mentioned in IS16444 Part 1, as per the requirement of the utility / authorized system integrator.

Basic Features

The Smart Meter would have the following minimum basic features-

- Measurement of electrical energy parameters
- Bidirectional Communication
- Integrated Load limiting switch /relay
- Tamper event detection, recording and reporting
- Power event alarms as per IS 16444 Part 1
- Remote firmware upgrade
- Pre-Paid features at MDM end (as per 15959 part 2)
- TOD feature
- Net Metering(kWh) features (optional as per requirement of utility)
- On demand reading

General standards applicable for meters

S. No.	Standard No.	Title
1	IS 13779 with latest amendments	AC Static Watt-hour Meter class 1& 2
2	IS 15884 with latest amendments	Alternating Current Direct Connected Static Prepayment Meters for Active Energy (Class 1 and 2)- Specification
3	IS 16444 Part 1 with latest amendments	A.C. Static Direct Connected Watt Hour Smart Meter Class 1 and 2- Specification
4	IS 15959 Part 1 & Part 2 with latest amendments	Data Exchange for Electricity Meter Reading, Tariff and Load Control-Companion Standards

Communication

Meter shall have the ability to communicate with Head End System (HES) on any one of the communication technologies mentioned in IS16444 Part 1 (RF/PLC/ Cellular) in a secure manner. The selection of communication technology should be as per the site conditions and as per design requirement of AMI Implementing agency to meet the performance as per agreed Service Level Agreements (SLAs). In case of Cellular based meter, the meter shall accommodate SIM card/ e-SIM of any service provider. The meter

shall log the removal of the plug-in type communication module removal /nonresponsive event with snapshot.

Remote connect/disconnect/load limiting: Remote Connect/disconnect/Load control facilities would be as per IS 16444 part 1.

Other Specifications

Features	Minimum requirement of features
Applicable Standards	The meters shall comply with IS 16444 Part 1 for all
	requirements.
Reference Voltage	As per relevant IS
Current Rating	10-60 A
Category	UC1
Starting Current	As per IS 16444 Part 1
Accuracy	Class 1.0 as per IS 16444 Part 1
Limits of error	As per IS 16444 Part 1
Operating Temperature range	As per IS 13779
Humidity	As per IS 13779
Frequency	As per IS 16444 Part 1
Influence Quantities	As per IS 16444 Part 1
Power Consumption of meter	As per IS 16444 Part 1
Current and Voltage Circuit	As per IS 16444 Part 1
Running at No Load	As per IS 16444 Part 1
Test output device	As per IS 16444 Part 1
Meter Display	As per IS 16444 Part 1
Name Plate & marking Meter	As per IS 16444 Part 1
Display	
Parameters to be measured	As per IS 16444 Part 1 / As per IS 15959 Part-2
Maximum Demand resetting	As per IS 15959 Part-2
Time of Use registers	As per IS 15959 Part-2
Power Quality Information	As per IS 15959 Part-2
LED/LCD Indicators	As per IS 16444 Part 1
Load Survey/Interval Data	As per IS 15959 Part-2
Tamper/ Event Recording	As per IS 15959 Part-2
Measuring Elements	As per Is 16444 Part 1
Alarm	As per IS 16444 Part 1 /
	As per IS 15959 Part-2
Load Control	As per IS 16444 Part 1
Connect/Disconnect switch	UC1 as per IS 16444 Part 1
Status of Load switch	As per IS 16444 Part 1
Programmability	As per IS 16444 Part 1
Communication	As per IS 16444 Part 1

Features	Minimum requirement of features
Remote Firmware upgrade	As per IS 15959 Part-2
Real Time Clock (RTC)	As per IS 16444 Part 1 /
	IS 15959 Part 1 & Part 2
Data Retention	As per IS 16444 Part 1
Battery Backup	Meter shall be supplied with adequate separate battery backup for RTC.
First Breath (Power on) and Last gasp (Power off) condition detection and communication to HES	As per IS 16444 Part 1
Plug-in Communication Module	The Smart Meters shall have a dedicated sealable slot for accommodating plug-in type bi -directional communication module which shall integrate the respective communication technology (RF/PLC/Cellular) with the Smart Meters, leading to easy adaptability for network interfaces (WAN/NAN). The Plug-In module shall be field swappable/replaceable.

Data display facility (auto/manual)

As per IS 16444. However minimum requirement should include the following:

Data Display shall be in two modes-

- 1. Auto Scroll
- 2. Scroll with Push Button

The display parameters shall be:

- Auto Scroll
 - Display Check
 - Date and Time
 - Last Recharge Amount
 - Last Recharge Time
 - Current Balance Amount
 - Current Balance days left
 - Cumulative Active Energy kWh with legend.
 - Cumulative Apparent Energy kVAh with legend.
 - Current month MD in kW with legend.
 - Current month average Power Factor
 - Instantaneous voltage VRN
 - Instantaneous voltage VYN
 - Instantaneous voltage VBN
 - Instantaneous current IR
 - Instantaneous current IY

- Instantaneous current IB
- Instantaneous current IN
- Instantaneous Load kW and kVA
- Instantaneous average Power Factor

These parameters should be displayed on the LCD/LED continuously for a period of 10 seconds on Auto scroll.

Scroll with Push-button

All Parameters mentioned under Auto-Scroll mode should be displayed. Additionally, the following Parameters shall also be displayed:

- Internal diagnostics (display check)
- Meter Serial No
- Cumulative Energy in kVArh Lag/ Lead with legend
- Cumulative Active Energy kWh ToD wise with legends.
- Cumulative Apparent Energy kVAh ToD wise with legends.
- Current month MD in kVAh with legends
- Last month cumulative kWh with legends
- Last month cumulative kVAh with legends
- Last month MD in kW with legends
- Last month Average Power Factor

Further, the Meter should display High Resolution energy values with resolution of 3 digits before decimal and 2 digits after decimal in push button mode.

The meter's display should return to default display mode (continues auto scroll) if push button is not operated for more than 10 seconds. (The order of display may be as per the requirement of utility). Meter display should go in to sleep mode during Power-On condition in case the push button is not operated for more than 10 minutes.

Anti-tamper features

The meter shall continue working under tamper conditions as defined in IS 15959 Part 2 and would log the event and send alarm at Head End System after detection of the defined tamper features as per IS 15959 Part 2.

Type Tests & Test Certificates

Smart Meter shall be type tested for tests as per relevant parts of IS 16444 (latest versions), and certified by Indian Standard wise list of BIS recognized labs as available at https://bis.gov.in/index.php/laboratorys/list-of-bis-recognized-lab/. The number of sampling for testing of meters and criteria for conformity would be as per IS 16444(as amended up to date). Necessary copies of test certificates shall be submitted as per agreement with the utility.

Routine & Acceptance Tests

The Factory Acceptance and Routine tests shall be carried out as per IS 16444 Part 1.

General & Constructional requirements

Meter shall be BIS marked as per IS 16444 Part 1. General & construction requirement shall be as per IS 16444/IS 13779

Meter base & cover - Meter base & cover shall be as per IS 16444 Part1 / IS 13779. The meter Base & cover shall be 'Break to open' design. The material for meter base and cover shall be made of high-grade polycarbonate.

The meter Base & cover shall be ultrasonically welded / chemically welded or other suitable bonding technology and it will not be possible to remove the cover from the base without evidence of damage

Terminal block & cover - As per IS 16444 Part 1/IS 13779

Design

Voltage circuit, sealing arrangement, terminal block, terminal cover and nameplate etc. shall be in accordance with IS-16444 Part 1 (latest version). The meter shall be compact and reliable in design, easy to transport and immune to vibration and shock involved in transportation and handling

Name plate and marking

The meter should bear a name plate clearly visible, effectively secured against removal and indelibly/distinctly marked in accordance with relevant IS. In addition, "Name of the Utility", purchase order no. & year/month of manufacturing shall be provided on the meter name plate. The rating plate information shall be as per relevant IS.

Connection diagram: As per IS 16444 Part 1

Fixing arrangements:

The meter shall be mounted type. The Meter should have three fixing holes, one at top and two at the bottom. The Top hole should be such that the holding screw is not accessible to the consumer after fixing the meters. The lower screws should be provided under sealable terminal cover. The requisite fixing screws shall be supplied with each meter.

Sealing arrangement:

Arrangements shall be provided for proper sealing of the meter cover so that access to the working parts shall not be possible without breaking the seal. The sealing arrangement and number of seals shall be as per relevant IS/ requirement of utility.

Meter box:

The Meter Box if required, would be provided as per requirement of the utility/ purchaser and the material of the Meter Box should be such that it does not hamper communications.

Packing

• The meters shall be suitably packed for vertical/horizontal support to withstand handling during transportation.

- The meter shall be packed appropriately to ensure safe transportation, handling, identification and storage.
- All packing materials shall be as per environment law in force. The primary packing shall ensure protection against humidity, dust, grease and safeguard the meter's performance until its installation.
- The secondary packing shall provide protection during transportation.
- The packing case shall indicate "Fragile in nature" and direction of placement of box.
- The packing shall indicate marking details like Manufacturer's name, meters #s, quantity, etc.

Transportation

- The meter shall be compact in design. The meter block unit shall be capable of withstanding stresses likely to occur in actual service and rough handling during transportation.
- The meter shall be convenient to transport and immune to shock and vibration during transportation and handling.
- The meter should not be exposed to undue shock and mishandling during transportation.
- The stacking of box inside transport media should be such as to avoid their free movement.
- The packing should also be protected from rain and dust by transport media.
- The AMISP shall be responsible for any damage during transit due to inadequate or improper packing.

Testing and Manufacturing Facilities at Manufacturer's Place

The manufacturer shall have facilities of conducting Acceptance Testing as per IS 16444 Part 1.

Inspection

- The meters shall be sealed as per the mutual agreement of the supplier and the purchaser
- Utility/ PFCCL may inspect the meter randomly as per sampling plan for acceptance test as per IS 16444 Part 1. The meters shall be tested for acceptance test as per IS 16444 Part 1

Annexure C Three phase CT operated alternating current Smart Meter of Accuracy Class 0.5S (DT Meter, LT-CT Meter, etc.)

C.1 General Standards Applicable for Meter

Unless otherwise specified elsewhere in this specification, the performance and testing of the meters shall conform to the following standards and amendments/revisions thereof.

SI. No.	Standard No.	Title
1	IS 16444: Part 2 with latest amendments	AC Static Transformer Operated Watt-hour and VAR-Hour Smart Meters, class 0.2S, 0.5S and 1S
2	CBIP- Publication 325 with latest amendments	Standardization of AC Static Electrical Energy Meters
3	CBIP Technical report no. 111 with latest amendments	Specification for Common Meter Reading Instrument
4	IS:9000 with latest amendments	Basic Environmental Testing Procedures for Electronic & Electrical Items.
5	IS 12063 with latest amendments	Degrees of protection provided by enclosures of electrical equipment.
6	IS 14451, Part-2: 1999 with latest amendments	Telemetering for consumption and demand. Direct digital transfer of meter values.
7	IS 4905: 1999 with latest amendments	Methods for Random sampling.
8	IS 12346 with latest amendments	Specifications for Testing Equipment for AC Energy meter.
9	IS 15959 Part 3 (as applicable) with latest amendments	Data exchange for electricity meter reading, tariff and load control: Companion specification

C.2 Communication

Meter shall have ability to communicate with HES on any one of the technologies mentioned in IS 16444 (RF/Cellular/PLC) in a secure manner. The selection of communication technology should be as per the site conditions and as per design requirement of the AMISP to meet the Service Level Agreements (SLAs). In case of cellular based meter, the meter shall accommodate SIM Card / e-SIM of any service provider. The

meter shall log the removal of the plug-in type communication module removal /nonresponsive event with snapshot.

C.3 Other Specifications

Particulars	Specifications
Applicable Standards	The meters shall comply with IS 16444: Part2 for all requirements except for those parameters which have been specifically mentioned to be otherwise in this specification.
Reference Voltage	[As per relevant IS]
Current Rating	lb 5A
Starting Current	As per IS 16444: Part2
Accuracy	Class 0.5S as per IS 16444: Part 2
Limits of error	As per IS 16444: Part 2
Operating Temperatur e range	As per IS 16444: Part 2
Humidity	As per IS 16444: Part 2
Frequency	As per IS 16444: Part 2
Influence Quantities	As per IS 16444: Part 2
Power Consumption of meter excluding communication module	As per I S 16444: Part 2
Current and Voltage circuit	As per IS 16444: Part 2
Running at No Load	As per IS 16444: Part 2
Test output device	As per IS 16444: Part 2
Meter Display	As per IS 16444: Part 2
Time of Use	As per IS 15959: Part 3 (as applicable)
(In case of net-meter both export & import parameters to be measured)	
Parameters to be measured	As per IS 16444: Part 2 / IS 15959: Part 3 (as applicable)
Power Quality Information	As per IS 15959: Part 3 (as applicable)
Maximum Demand	As per IS 15959: Part 3 (as applicable)

Particulars	Specifications
Load Survey/Interval Data	As per IS 15959: Part 3 (as applicable)
LED/LCD Indicators	As per IS 16444: Part 2
Tamper/Event recording	As per IS 15959: Part 3 (as applicable)
Alarm	As per IS 16444 / IS 15959: Part 3 (as applicable)
Measuring Elements	As per IS 16444: Part 2
Anti-Tamper features	The meter shall continue working under tamper conditions as defined in IS 15959 Part 3 and would log the event and send alarm at HES after logging of the defined tamper features as per IS 15959 Part 3.
Programmability	As per IS 16444: Part 2
Communication	As per IS 16444: Part 2
Communication Protocol	As per IS 15959: Part 3 (as applicable)
Real time clock (RTC)	As per IS 16444: Part 2 / IS 15959: Part 3 (as applicable)
Data Retention	As per IS 16444: Part 2
Battery Backup	Meter shall be supplied with separate battery backup for RTC.
Data display facility	As per IS 16444: Part 2 (as applicable)
(manual/Auto)	However minimum requirement should include the following:
	Data Display shall have following features:
	 High Resolution (Shall display energy values with resolution of 2 digits before decimal and 3 digits after decimal.
	The Push button for manual scrolling in addition to auto scrolling with a persistence time of 10 seconds for each parameter shall be provided.
	Display of data as per IS 16444 (Part 2)
Remote Firmware Upgrade	As per IS 15959: Part 3 (as applicable)

The CT operated meters would have capability to control external switching device. In future if such a connect-disconnect feature is available for CT operated meters, the provision for pre-paid functionality shall be possible through software at MDM/ HES level

Annexure D Three phase CT/PT operated alternating current Smart Meter of Accuracy Class 0.5S/ 0.2S (as required) –Feeder Meter, Boundary Meter, HT Consumers, etc.

D.1 General Standards Applicable for Meter

Unless otherwise specified elsewhere in this specification, the performance and testing of the meters shall conform to the following standards and amendments/revisions thereof.

SI. No.	Standard No.	Title
1	IS 16444: Part 2 with latest amendments	AC Static Transformer Operated Watt-hour and VAR-Hour Smart Meters, class 0.2S, 0.5S and 1S
2	CBIP- Publication 325 with latest amendments	Standardization of AC Static Electrical Energy Meters
3	CBIP Technical report no. 111 with latest amendments	Specification for Common Meter Reading Instrument
4	IS:9000 with latest amendments	Basic Environmental Testing Procedures for Electronic & Electrical Items.
5	IS 12063 with latest amendments	Degrees of protection provided by enclosures of electrical equipment.
6	IS 14451, Part-2: 1999 with latest amendments	Telemetering for consumption and demand. Direct digital transfer of meter values.
7	IS 4905: 1999 with latest amendments	Methods for Random sampling.
8	IS 12346 with latest amendments	Specifications for Testing Equipment for AC Energy meter.
9	IS 15959 Part 3 (as applicable) with latest amendments	Data exchange for electricity meter reading, tariff and load control: Companion specification

D.2 Communication

Meter shall have ability to communicate with HES on any one of the technologies mentioned in IS 16444 (RF/Cellular/PLC) in a secure manner. The selection of communication technology should be as per the site conditions and as per design requirement of the AMISP to meet the Service Level Agreements (SLAs). In case of cellular based meter, the meter shall accommodate SIM Card / e-SIM of any service provider. The

meter shall log the removal of the plug-in type communication module removal /nonresponsive event with snapshot.

D.3 Other Specifications

Particulars	Specifications
Applicable Standards	The meters shall comply with IS 16444: Part2 for all requirements except for those parameters which have been specifically mentioned to be otherwise in this specification.
Reference Voltage	[As per relevant IS]
Current Rating	Ib 5A/ 1A (as applicable)
Starting Current	As per IS 16444: Part2
Accuracy	Class 0.5S or 0.2S as per IS 16444: Part 2
Limits of error	As per IS 16444: Part 2
Operating Temperatur e range	As per IS 16444: Part 2
Humidity	As per IS 16444: Part 2
Frequency	As per IS 16444: Part 2
Influence Quantities	As per IS 16444: Part 2
Power Consumption of meter excluding communication module	As per I S 16444: Part 2
Current and Voltage circuit	As per IS 16444: Part 2
Running at No Load	As per IS 16444: Part 2
Test output device	As per IS 16444: Part 2
Meter Display	As per IS 16444: Part 2
Time of Use	As per IS 15959: Part 3 (as applicable)
(In case of net-meter both export & import parameters to be measured)	
Parameters to be measured	As per IS 16444: Part 2 / IS 15959: Part 3 (as applicable)
Power Quality Information	As per IS 15959: Part 3 (as applicable)
Maximum Demand	As per IS 15959: Part 3 (as applicable)

Particulars	Specifications	
Load Survey/Interval Data	As per IS 15959: Part 3 (as applicable)	
LED/LCD Indicators	As per IS 16444: Part 2	
Tamper/Event recording	As per IS 15959: Part 3 (as applicable)	
Alarm	As per IS 16444 / IS 15959: Part 3 (as applicable)	
Measuring Elements	As per IS 16444: Part 2	
Anti-Tamper features	The meter shall continue working under tamper conditions as defined in IS 15959 Part 3 and would log the event and send alarm at HES after logging of the defined tamper features as per IS 15959 Part 3.	
Programmability	As per IS 16444: Part 2	
Communication	As per IS 16444: Part 2	
Communication Protocol	As per IS 15959: Part 3 (as applicable)	
Real time clock (RTC)	As per IS 16444: Part 2 / IS 15959: Part 3 (as applicable)	
Data Retention	As per IS 16444: Part 2	
Battery Backup	Meter shall be supplied with separate battery backup for RTC.	
Data display facility	As per IS 16444: Part 2 (as applicable)	
(manual/Auto)	However minimum requirement should include the following:	
	Data Display shall have following features:	
	 High Resolution (Shall display energy values with resolution of 2 digits before decimal and 5 digits after decimal. 	
	 The Push button for manual scrolling in addition to auto scrolling with a persistence time of 10 seconds for each parameter shall be provided. 	
	Display of data as per IS 16444 (Part 2)	
Remote Firmware Upgrade	As per IS 15959: Part 3 (as applicable)	

The CT operated meters would have capability to control external switching device. In future if such a connect-disconnect feature is available for CT operated meters, the provision for pre-paid functionality shall be possible through software at MDM/ HES level

Annexure E System Sizing Requirement

E.1 Sizing Parameter

The system shall be designed as per the technical parameters defined in this specification and as specified in this Annexure.

The AMI system (MDM, Historian, NMS etc.) shall be suitably sized based on expansion requirements mentioned in Article 14 of Section 7.

The auxiliary memory and utilization of any of the Servers shall not exceed 30% and 25% respectively of their delivered capacity at any time even under peak loading conditions involving a combination of the following -

- 400 alarms per minute for 5 minutes.
- 10 concurrent display requests from 5 users. Including graphical trends
- Restoration of 100%-meter data after system failure.
- VEE and billing determinant calculations involving 10,000 consumer meters
- System activity alarms.

This memory utilization includes the memory used for storage of data (including expansion requirement defined in above para) for the defined duration as specified in the Technical Specification. The system architecture and the network design shall have the ability to handle the growth with respect to functions, and user as defined.

Annexure F General requirement for common pluggable communication module for Smart Meters

Considering that the new Smart Meters may use different types of communication technologies (RF/PLCC/Cellular, etc.), thus in order to enable different communication modules to be used in the same meter, it is necessary to use a universal interface and a particular size irrespective of the choice of communication technology that defines the dimensions of the communication slot as well as physical placement and location of connectors. The following example recommendations will go a long way in assuring interoperability whilst still complying with the provisions of IS 16444 and IS 15959 standards:

Part I

1. Recommended Module Placement location

In order to improve the Radio Performances of any of the wireless technologies encompassing but not limited to Cellular, RF and / or RF mesh, it is recommended to place the communication module anywhere on the accessible part of the meter. This will also enable an easy approach to improve antennae performances.

- 2. Meter shall have the means of tamper detection to record the event(s) of the removal of the communication module set from the meter, irrespective of whether the meter is in power on (has supply) or powered off (no supply) condition.
- 3. The Module shall be hot swappable and shall fit snugly inside the meter box, so that the same IP class of the meter is maintained.
- 4. A transparent cover may be used for the purpose,
 - a. To have a sealing arrangement with the meter body as well as
 - b. For easy viewing of LED indicators and antenna assembly without having to open the cover.


Part II

AC power interface:

In the event of PLC communication being chosen as the only or one of the choices, the following arrangement of connector and pinouts need to be provisioned on the communication module.

Female connector

1. Front View:




Single phase meter


-	25.4±	0.2	-
2	□8	□ 14	□ 20
□1	1 7	□ 13	1 9
N	L1	L2	L3

Poly phase meter

2、Top View:




Single phase meter



Poly phase meter

3. Side View:




Pin to Pin distance should be: 7.62mm (Standard Pin connector)

Communication interface:


The meter shall have a slot of an appropriate size to allow for the pluggable communication module (such as but not limited to NAN /WAN, dual mode RF, Dual Technology, cellular etc.) to be fit in to the meter. The meter shall provide a 14-pins Female socket connector (2*7pin, 2.54mm). The socket shall be selected and positioned to ensure that the male pins on the communication module can connect reliably and easily connect with the female contactors on the meter.

Female connector


1. Front View:



2. Top View:

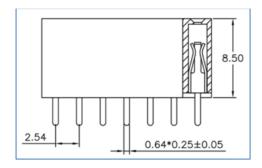

3. Side View:



PIN Outs may be provided as per below details

Pin No	Name	Input/output	Description
1	Reserved	1	/
2	Reserved	1	/
3	Power EN	Output	Control the module's power supply
4	Reserved	1	1
5	Reserved	1	/
6	Meter TXD	Output	To Module UART port RXD, Min.38400
7	Meter RXD	Input	From Module UART port TXD, Min.38400
8	Reserved	1	/
9	RTS	Input	Input digital signal from module
10	RST	Output	Reset signal for module


Pin No	Name	Input/output	Description
11	CTS	Output	Output digital signal to module
12	+Vdc	Power	As per IS16444
13	GND	Common	Ground Reference Potential
14	GND	Common	Ground Reference Potential

Part III


The following reference size may be adhered to irrespective of a single or multiple communication options provisioned on the same module. This standard form factor and dimensions will enable physical and functional interoperability with different makes of meters.

A. Module 3-D views (For Representational Purpose Only)

1. Module in meter (Top View)



2. 3D View

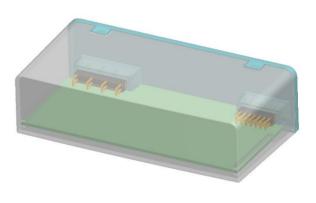

4. Back View



3. Front View



5. Side View

6. Top View









7. Bottom View

B. Module Dimensions

Overall view of the module:

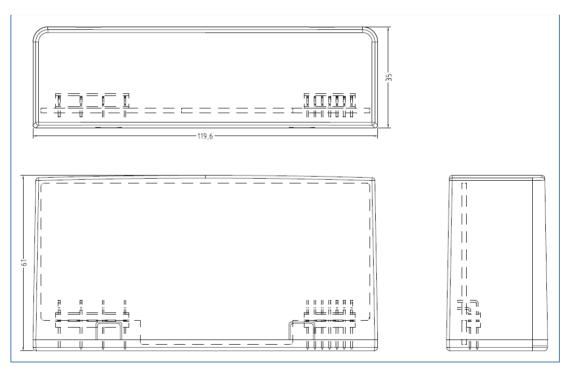

Overall view of the module's PCBA:

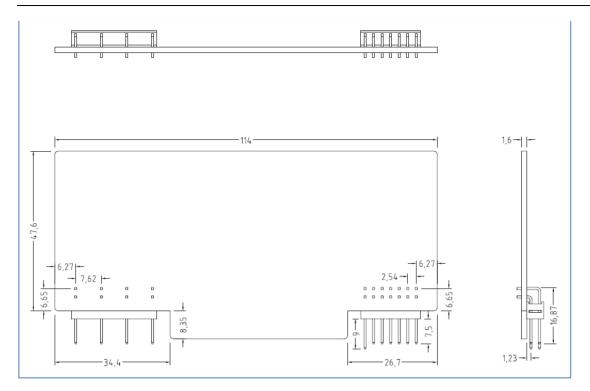

Notes: Module Reference Sizes: unit mm.

Annexure G Details of ESB Architecture

Deleted

Annexure H Future Demand Response Program Use Cases for Reference

The objective of the Demand Response is to optimal utilization of energy resources by uniform distribution of load across the day, to save additional investment in capacity addition within the utility, improved access of power to rural areas, reduction in technical losses, enhanced consumer satisfaction by load curtailment in place of load shedding.

S.No	Functional requirement	Description of Functional requirement
1.	Load Curtailment event in place of Load Shedding	System will determine based on day ahead schedule for available generation capacity and load forecasting the load curtailment events. Advance notice will be sent to a group of consumers affected by this load curtailment. DR system will send the load curtailment command to the MDM. The MDM will forward this command to the appropriate AMI Head-End.
2.	DR Program Commencement	Once the consumer is set up with all the devices necessary, the consumer details will be sent to DR system. Premium charges for assured power supply with SLA and/or Rebates and incentives can be given to consumers who participate in DR programs.
3.	Real time Pricing	Utility shall be able to send real-time pricing signals to end consumers/ AMI system
4.	Curtailment due to Contract Violation	Utility limits consumer's load due to reasons like exceeding contract load Alarms (visual and audio) shall be provided in case of load violation (in home device, Email, SMS etc.). The billing system shall be notified of the load violation, and the corresponding charges shall be applied to consumer (based on tariff rules).
5.	Demand side Management	In every 15-minute interval Meter data should be captured, Confirmation of action taken for demand response should be mentioned as well as monitoring of historical Consumer Load Profile should be done.
6.	Load Monitoring at Demand side	Daily Meter Reading, Status and associated details capturing for records of consumer consumption data, TOU details, real time trends and Load profile Details. Along with this whenever there is a load violation event recorded in the meter, the information is sent to the control center
7.	Initiate Direct Load Control Event	Utility calls a Direct Load Control Event using the Peak Load Management (PLM) Application and executes through head-end by sending a load control signal to Smart Appliances thru HAN/Smart Meter or other means
8.	Energy accounting system	Register and Interval based accounting: Register based Register based accounting supports requirements for prepaid energy accounting based on register reads. It includes billing cycle data services that deliver billing determinants via an interface to CIS/Billing on the billing cycle date and on request when special reads are required. A Billing Determinant Calculator provides the flexibility to compute the billing determinant values based on utility defined formulas.

S.No	Functional requirement	Description of Functional requirement		
S.No		Formulas are built around logical and arithmetic operators, and can contain other billing determinants, constants, and consumer functions. Bi-directional MDM should support bi-directional metering by processing the delivered and received channels for a given meter in two separate channels. Net Metering (using Virtual channel) MDM should support net metering by processing the delivered and received channels from the meter/recorder and calculating a net amount. The calculated net will be stored onto a virtual channel. MDM should provide full tracking, management, and storage of usage data related to each data channel. This allows summation of usage data separately for each data channel. Usage Calculated from Register Reads MDM can create usage data from register reads received from AMI systems or gathered manually through HHUs. MDM will calculate the difference between the current bill period register read and the previous bill period register read, applying the ratio required converting to the correct kWh usage. Rollover conditions are also considered when computing usage. The calculated usage is stored in the billing table and accessible to all applications that require the data. Interval Billing: The Interval Billing should include all of the functionality offered		
		in the Register Billing in addition to support Advanced Billing Determinants (ABD) calculated from interval reads. As interval data is retrieved by the AMI systems, the Advanced Billing Determinant (ABD) engine should process the interval reads into daily and billing cycle usage-based billing determinants (as compared to register-based billing). For example, if 15 min interval data is retrieved by the system, MDM calculates the proper billing determinant which is based on RTP/ Time-of-Use (TOU) tariff, then ABD engine will make this computation based on tariff configuration data in the database. Then it stores this daily data set (RTP/TOU values with usage details for each), along with the interval data in the Metered Usage Data Repository (MUDR). On each billing cycle, the ABD engine will summarize the RTP/TOU and demand data for each period over the requested billing span and deliver these billing determinants to the billing system. By performing the billing determinant summations daily, MDM support end-user presentation of "month-to-date" information as well as spread computational loads over time (including weekends).		

Annexure I Conditions/protocols for auto-disconnections

- a) The consumer categories for which the protocol for auto-disconnections shall apply and consumer categories for which the same shall not be applicable would be mutually decided between Utility/ PFCCL and AMISP
- b) The auto-disconnection shall not be allowed during gazetted holiday / national holidays and during night-time

Annexure J AMI system availability

AMI system issues and availability are flagged at three different severity levels.

- a) Severity 1 is the most critical being a complete system level failure or breach of IT policies and requiring urgent and immediate attention.
- b) Coverage under severity 2 are outages that do not cause any immediate disruption but subsequently may result into severity 1 outage.
- c) Severity 3 are those issues / problems / outages which are neither of an emergency nor priority level as grouped under severity level 1 or 2.

The AMISP shall implement an appropriate online SLA Application (as elaborated in Clause 7.7 of this Section) for problem/defect reporting and tracking system. This would enable logging and tracking of outages / defects/non-conformances of all severity levels and get the approval of the same from PFCCL/ Utility towards desired resolution. The incidents (15 in number) are categorized as mentioned in below table.

Category	Incident Description ⁵
Severity 1 – Urgent	 a) Complete loss of AMI system functions⁶ b) Partial outage of AMI functions i. Utility user interface ii. Consumer portal c) Stoppage of data backup at DC/DR (refer Clause '7.3.1 e' of this Section) d) Cyber Security issues leading to unauthorized access to systems/applications
Severity 2 – Serious	 a) Outage at Network Operation cum Monitoring Centre i. Complete outage of communication connectivity ii. Failure of UPS system iii. Failure of Battery / other auxiliary system) b) Interruption of data exchange with utility enterprise systems c) Partial outage of AMI functions i. Outage of VEE ii. Billing Determinants iii. Reports d) Breach of data privacy e) Adherence to RPO / RTO⁷ as per Clause 2.7.3.3.9 of this Section and as mentioned in Clause 7.3.1 of this Section

⁵ Please note that the table provides the different incidents categorized under different severity levels. If any incident at a higher severity level or order is active, then it shall be understood that a new incident at a lower severity level or order linked to the one at the higher-level incident, shall not be separately registered. For instance, when there is an incident "Complete Outage of AMI system functions" under Severity-1, then "Partial outage of AMI functions" or "Interruption of data exchange with utility enterprise systems" shall not be registered.

⁶ A complete outage of AMI functions may happen due to a system level crash or outage of DC/DR infra or outage of MPLS bandwidth at DC/DR

 $^{^{7}\,\}mathrm{RTO}$ and RPO are expected to be checked once a month for purpose of SLA

Category	Incident Description⁵		
Severity 3 – Minor	 a) Non-availability of reports as per Clause 6.2 of this Section during the Operation Phase b) Resolution of complaint ticket raised and passed on by CCS [These complaints shall be registered within the SLA Application and hence shall have to undergo mutual agreement checks between PFCCL/Utility/AMISP before being registered for resolution] c) Non-availability of required inventory of spares specified in Clause 7.3.3 of this Section d) Failure of workstation, printers, LAN etc. at the NOMC e) Non-availability of designated AMISP's Manpower at the NOMC 		

I.1 Response & Resolution Time

The target times within which the AMISP should respond to support requests for each category of severity is described in the following table.

- a) The Initial Response Time is defined as the period from the initial logging of the support request (through established systems and/or communications channels) and the acknowledgment of the AMISP subject to the maximum time defined in the following table. In case, AMISP doesn't respond within initial response time, the support shall be deemed acknowledged by the AMISP.
- b) The Action Resolution Time is the period from the acknowledgement of support request to the AMISP delivering a solution subject to the Maximum time defined in following table.
- c) The Action Resolution Time includes investigation time and consideration of alternative courses of action to remedy the situation.

Severity	Initial Response Time	Maximum Action Resolution Time	Action			
1	15 minutes 2 hours		An urgent or emergency situation requiring continuous attention from necessary suppor staff until system operation is restored.			
2	30 minutes	24 Hours	Attempt to find a solution acceptable to the utility (dependent on reproducibility), as quickly as practical.			
3	2 hours	10 days	Evaluation and action plan. Resolution time is dependent on reproducibility, ability to gather data, and the Utility's prioritization.			

I.2 Service Response Requirements

Emergency Support for Severity 1 issues are to be provided 24 hours a day, seven days a week. The on-call support team shall include all key technical competencies so that any aspect of a system failure can be attended to. Severity 1 issues shall be reported by telephone for rapid response; the key objective is to restore the system to an operational state as quickly as possible.

I.3 System Availability Calculations

System level issues / availability calculation methodology shall be as below:

- a) For Severity-1 and 2 level incidents, the non-availability hours for availability calculation shall be counted from the end of the allowed Action Resolution time for their first instance in a given month. If any incident, repeats in the same month, the non-availability hours for availability calculation shall be counted from the end of allowed Initial Response Time.
- b) For Severity-3 events, the non-availability hours for availability calculation shall be counted from the end of the allowed Action Resolution time

A standardized online ticket register shall be maintained, that shall be made available to utility online, containing the following:

Details of each issue reported:

- a) Actions taken by AMISP to correct the issue
- b) Applicable Severity level
- c) Time of reporting to the AMISP support engineer/support
- d) Actual vs Allowed response & resolution time as defined in this annexure
- e) Review of utility's Engineer-in-charge as well as the AMISP's support engineer of the site.

In the event of multiple failures at a site, due to a common cause, the first FPR (Field Problem, Report) logged shall be used for the purpose of system availability calculation. However, simultaneous multiple outages due to unrelated cause would be counted separately.

Availability computation shall be done on monthly basis in selected area(s) of operation. The formula to be used for availability computation shall be as under:

Availability per month = $\frac{\text{THM} - (\text{S1 X 1} + \text{S2 X 0.8} + \text{S3 X 0.5})}{\text{THM}}$

- Where THM is total hours in the month when power supply to AMI system is available
- S1/S2/S3 is the total non-available hours in Severity Level-1/2/3

S1/S2/S3 are computed for each event. For instance, S3 for each Severity-3 event would be number of hours passed beyond the maximum resolution time for which the event is not resolved. Some examples for the same are provided below

Category

Example of computing non-available hours

Category	Example of computing non-available hours
Severity 1 – Urgent	For incidents happening for the first time in the month, Number of hours beyond the allowed maximum resolution time for which:
	 a) Complete loss of AMI system functions b) Partial outage of AMI functions i. Utility user interface ii. Consumer portal c) Cyber security issues remain unresolved d) Data backup at DC/DR remains stopped
	For incidents happening for the second or more times in the month, Number of hours beyond the allowed initial response time for which:
	 a) Complete loss of AMI system functions b) Partial outage of AMI functions i. Utility user interface ii. Consumer portal c) Cyber security issues remain unresolved d) Data backup at DC/DR remains stopped
Severity 2 – Serious	For incidents happening for the first time in the month, Number of hours beyond the allowed maximum resolution time for which: a) Outage at Network Operation cum Monitoring Centre
	i. Complete outage of communication connectivityii. Failure of UPS systemiii. Failure of Battery / other auxiliary system)
	 b) Partial outage of AMI functions i. Outage of VEE ii. Billing Determinants iii. Reports etc.
	 c) Any single event on data privacy breach is not resolved d) Interruption of data exchange with utility enterprise systems remains unresolved
	e) Adherence to RPO / RTO is not ensured For incidents happening for the second or more times in the month, Number of working hours beyond the allowed initial response time for which
	a) Outage at Network Operation cum Monitoring Centre i. Complete outage of communication connectivity ii. Failure of UPS system
	 iii. Failure of Battery / other auxiliary system) b) Partial outage of AMI functions i. Outage of VEE ii. Billing Determinants iii. Reports etc.
	c) Any single event on data privacy breach is not resolved

Category	Example of computing non-available hours			
	 d) Interruption of data exchange with utility enterprise systems remains unresolved e) Adherence to RPO / RTO is not ensured 			
Severity 3 – Minor	Number of days beyond 10 days for which (Number of days shall be converted to number of hours by multiplying it with 24)			
	 a) Non-availability of reports as per Clause 6.2 of this Section during the Operation Phase b) Resolution of complaint ticket raised and passed on by CCS [These complaints shall be registered within the SLA Application and hence shall have to undergo mutual agreement checks between Utility/AMISP before being registered for resolution] c) Non-availability of required inventory of spares specified in Clause 7.3.3 of this Section d) Failure of workstation, printers, LAN etc. at the NOMC e) Non-availability of designated AMISP's Manpower at the NOMC 			

Annexure K
of billing data collection for different consumer category

Utility's schedule for billing for various consumers on which the current AMI system (procured under this contract) would be provided after execution of Contract between PFCCL and AMISP.

Annexure L

Integration Interface of Existing Enterprise Applications

Presently, IT billing is functioning through the software developed by NIC using .net framework and is hosted in NIC cloud. The meter reading details are uploaded from TAB and bill processed in the cloud and bill details available to the consumer. The software code will be made available to AMISP and access to demo server will be provided and the AMISP should arrange for integration of AMI system with the above cloud billing system. AMISP shall also provide support for maintenance of the existing billing system. AMISP shall also carry out integration with meter installed by the Utility under Smart Grid projects for enabling pre-payment mode.

Annexure M Additiona

I Requirements/ Specifications

<To be filled by the Utility and approved by REC / MoP>

Single Phase Whole Current Smart Meter

S. No.	Description of the Features
1	
2	

Three Phase Whole Current Smart Meter

S. No.	Description of the Features
1	
2	

Three Phase LT-CT Operated Smart Meter

S. No.	Description of the Features
1	
2	

Three Phase CT/PT Operated Smart Meter

S. No.	Description of the Features
1	
2	

Annexure N Specifications of IT Billing Module

Objective: A comprehensive billing system which support scenarios like post-paid, pre-paid, net metering, will ensure that the Utility efficiently bill their customers for the services rendered. It should support the continuous billing to reduce the outstanding. Ensure the timely and accurate billing. The system will support the complaints handling functionally by providing short turnaround times for billing and services related customer gueries.

The proposed solution should have inbuilt analytics with real time data on metering, billing, collection efficiencies so overall working for utility official becomes easier. They should get reports instantly to take actions on nonperformance which improves customer service, reduces pending collections, and ensures regulatory compliance on energy audit reporting.

System Boundary: From: Accepting Consumption data To: Providing reminder letters and alerts on smart meters and consumer mobile phones System Functionality: This system should broadly cover functions relating to generation, printing and issue of bills to the consumers electronically through various channels.

Specifications for various billing types, tracking of reasons for deviations from normal billing, billing logic flexibility as per timely regulations and tariff orders, net metering etc. are some of the features that the system should address.

Specification Billing					
Requirement ID	Functionality	Description	Criticality	Response	Comments
B1.	Unique Bill No	All bills generated by the system should be given a unique number	Vital	C/ER/F/ CR/ NC	
B2.	Format of bill number	The logic for defining the bill number would be flexible and provided by the Utility. For example the system should be capable of generating bill numbers that are reflective of the Section Office, Subdivision, Division etc. that the customer falls under. It should also capture the customer category and the billing month.	Vital	C/ ER/F/ CR/ NC	
B3.	Bill Calculation - Billing Logic flexibility	Utility would provide the billing logic for generation of bills. This calculation logic will be flexible and the utility should be able to revise the billing logic from time to time depending upon the modifications in regulations, tariffs, etc. It should be possible to make these changes from a central location. The system should follow the same for computing the final bill amount and should generate bill in soft and hard forms for the all type of requisite customers with certain pre-defined periodicity. The periodicity may also vary from generating continuous bills for spot billing to bills once a year for particular type of customers like agricultural customers. The system should have the flexibility of defining the periodicity in bill processing. The system should have the capability to generate the bills either in batches or individually. System should also accept billing logic for consumer purchased meters. Suitable rebate as per rule be provided for consumer purchased meters. Suitable rebate as per rule be provided for consumer purchased meters. System should have provision of - i) Auto-credit of penalty specified by regulator for Utility in case of deficiency of service to the consumer ii) Putting a certain bill amount under deferral due to stay order from court till the matter is decided. iii) Late payment charges application in case bill paid late by due data iV) Prepayment incentives if paid earlier – applicable for post paid cases V) Interest on overdue items (slab rates) Vi) Tax collected on source - Section 206C of the income tax		C/ ER /F/ CR/ NC	

		act governs the goods on which the TCS applies, and the tax shall be collected from the purchaser viii) Seal Management viii) Electricity duty on energy supplied			
B4.	Transfer in billing logic	System should also support prepaid metering and billing system, if implemented by Utility later on and should permit seamless transfer of existing customers from i) post-paid to prepaid regime and back ii) Unmetered to metered regime iii) kWh based billing to KWh & kVArh based billing regime and back		C/ ER/F/ CR/ NC	
B5.	Meter data validation	The system shall be capable of identifying meter tampering data as per utility defined criteria and generate flags for operator intimation and further investigation. The billing system shall be capable of identifying faulty meters and preparation of bills considering a defined algorithm for estimation of consumption during such periods of meter faults. The bills shall indicate the estimated consumption separately. System shall also incorporate multiple meter changes in a single billing cycle, properly accounting old meter final consumption based on final reading (or assessment if functional reading is not available)			
B6.	Bar code generation	System should be capable of automatic generation of bar code and printing on the consumer's bill Using Code-39 or any other Universal standard; capable of generating Alphanumeric and all the special characters available on 'Microsoft-Word', Additional Capability to generate output in 'local language' script will be preferred.			
B7.	Billing logic download	System should be capable to download the billing logic to CMRI/HHC to facilitate spot billing at consumer premises using HHC/CMRI as and when required.	Vital		
B8.	Bill printing based on dispatch sequence	System must be able to automatically select and print those bills together in a desirable sequence for ease of distribution, which are under same reading cycle/group, convenient for walking order of meter readers/bill distributors.			
B9.	Group billing	System should allow for generation of common bill for a set of consumers with same due date. The system should also have provision for generation of bill of multiple premises on a single bill for a single customer, if the customer has opted for the same.			
B10.	Bill printing flexibility	System must support bill processing and printing either at workstation location or at the base billing center.	Essential		
B11.	Use of pre printed stationary	System must be able to print the bills either on pre-printed stationary or plain paper in Hindi/English/Local language as per directions of Utility.	Vital		
B12.	Interfacing with manual billing	The system should have the flexibility of capturing inputs manually to update the customer database on bills that have been manually generated, with a reason for the same. Such updates should be limited to specific logins.			
B13.	Bill on demand	The system should be capable of generating bills on demand by the customers. The system should have the provision of generating duplicate bills on demand from the customer - and have the provision for accepting payment details for the same. The system shall have provision to print duplicate bill of any			

past bill up to last 3 years (applicable after the software is rolled out) B14. Bill correction/ The Bill Vital system should have provision for amendment correction/amendment through process, not manually to provisions update/ modify the customer billing database, Such bill amendments should be limited to specific logins. The system shall employ separate accounting process for bill amendments, which results in reversal of sales (Unit and Rs) booked (bill raised) in past financial years, i.e. prior to start of current year. B15. The system will have the capability to change billing cycle of a Essential Change billing cycle consumer. The changes would include - shifting to another cycle and increasing or decreasing the frequency of billing. B16. Interfacing If there is some special scheme for payments (e.g. Essential with specia Installments), then the system will generate the bills taking into drives account the special scheme provisions. Also, there would be codes for all the Schemes, so that the system can track their usage. There would be codes for all the Schemes so that the system can track their usage. The system will keep a record, as to who authorized the scheme (e.g. installment) and capture the details of the scheme. B17. System should have options for level payments where in the Vital Options level customer can pay a fixed amount per month. In such a scheme, system should also provide for balancing the charges payments at the end of the year for any variations between the calculated amount (Fixed amount) Vs the actual charges the customer has incurred. B18. System should have provision to compute penal billing for Vital Penal Billing for unauthorized unauthorized use of electricity, as per Electricity Act, and use of electricity based on parameters defined by JERC Assessment based on sanctioned load / connected load Assessment based on error in meter accuracy due to b) tampering Penal tariff for theft / misuse. B19. The system should link the customer to the rate applicable to Vital Linking his category. The rate applicable is calculated on the basis of consumer appropriate consumed energy, charges, capacity consumption limit), taxes applicable, subsidy or support from tariff the government, etc. System shall also have provision to account for retrospective changes in tariff / discount / subsidy announced by Govt. with effect from back date. In case of subsidized customer the system should calculate amount of subsidy payable against each bill and if utility want the subsidy amount can be printed on the bill for information of customer B20. Inclusion of past The system should calculate other dues for the customer (e.g. late payment charge, electricity duty surcharge, assessed dues and amount, etc) and add them to the regular bill amount. If there surcharge are past dues, the system should calculate both the past dues and the fines on past dues as applicable. The system should allow flexibility to define and modify the logic for fine/ penalty calculation for different types of arrears as per the prevailing norms of the utility. If past dues are there the generated bill should include past dues. In case of any post facto extension of due date, system to have provisions to automatically waive late payment

		surcharge.		
B21.	Management of Security Deposit (SD):	The system should have provision of Managing Security Deposit (SD) like: i.) Auto-debit of incremental SD in bill(s), eg, in case of load enhancement ii.) Refund of SD by adjustment in final Bill iii.) Interest payout on SD through auto-debit in bills or lump sum payout separately iv.) Adjustment of SD in prepaid charges for any consumer shifting from post-paid to prepaid regime		
B22.	Billing with pre- payment credit	If there is any credit on account of prepayment, adjustment etc., the system should be able to adjust the credit against the amount payable for the month and generate a zero or a negative bill.		
B23.	Estimate billing	As and when the metering data is validated in the system, it should be capable to generate bill under the normal billing cycle. In case of meter data is not available the system should generate an estimate bill based on the past consumption pattern of the customer. It shall also be possible to generate Estimate Bill for theft/ enforcement cases. The system should also provide for change in the estimation logic that may happen from time to time. The system should incorporate the estimate for consumption from the metering module.		
B24.	Reasons for estimate billing	The system will have a list of all standard reasons for estimate billing. The list will be compiled based upon the utility and JERC guidelines, which may change from time to time. The system should be capable of generating bills for all instances of exceptional readings. The scenarios under which exceptional readings are taken are temporary connections, voluntary termination, forced termination etc. The system will allow the bill amount to be modified by the designate authorities through their login ids only. All such changes along with the corresponding login ids will be tracked by the system.		
B25.		The system should be capable to dispatch the generated bill electronically to customer/ payment portals to which customer is registered if desired by customer. The bill in actual format must also be available on utility's internet portal for customers. System must be able to inform customer regarding new bill along with due date & amount via SMS automatically. The system should allow generation of reminder letters at predefined intervals before the due date - over the web/ mobile phones/ paper formats.		
B26.	Discontinuing billing after dismantling	The system should have the provision of stopping the generation of bills and taking the arrears as bad debts, after a Purchaser specified period of time, say 6-12 months after dismantlement.	Desirable	
B27.	Billing for temporary connections	The system should have the provision of preparation of Temporary Connection Energy Bill, with DISCOM defined Category and Charges. Provision for - a) Final Bill Proportion b) Fixed amount calculation c) (In case of first bill) d) Amount Shifted to next bill (if next bill is prepared in same month) e) Debit/Credit Adjustment f) (Unit or Amount)	Vital	

The system should have provision for automatic job creation for disconnection and final billing of temporary connections one day prior to the expiry of the duration for which the temporary connection was granted. The system should also have option to extend such temporary connections based on utility defined authorization B28. Creation of The system should provide the monthly ledger of the m				1	ı	T
monthly ledger assessment and realization. B29. Ledger adjustment in ledger. B30. Final The system should have the provision for Debit/Credit Vital Adjustment in ledger. B31. The system should have the provision for Final Bill Essential Reconciliation, in case of permanent disconnection and provision for final amount adjustment. B31. Monthly report Module can close Ledger monthly and generate assessment Vital and realization report. B32. Last bill In case a customer requests for termination of connection, the system should accept the terminating meter reading (which will be out of cycle in most cases) for generating the last bill. B33. Provision for holding bill printing till checked of the system should have the provision of not allowing to print any bill of a cycle unless cleared by bill quality check group. System shall have post billing filters to outsort abnormal bills based on logic, so that such bills are not printed/sent to consumer by any mode. B34. Bill distribution The system should have provision to generate optimal bill checked plan distributior route plan based on bill distribution jobs in a given green area in a given oxcle. B35. Enforcement and Legal Module Legal Module Legal Module Legal and distribution provision to logic leads of their misuse by: - Creating automatic leads based on consumption analysis and tamper analysis - Accepting lead through mail, website, phone calls, call centre or any other mode - Capturing the details of the lead contributor person, whether employee/coussider B36. Enforcement and Legal and life cycle tracking for: Module: Lead - Assessment billing proceedings - Recovery of installments - Case closure B37 Energy audit Collection of energy flow data from metering module - Provision of graphical network diagram and network reconfiguration - Provision of simated technical losses in the system - Calculation of estimated technical losses in the system - Generation of report of energy accounting and graphical analysis			for disconnection and final billing of temporary connections one day prior to the expiry of the duration for which the temporary connection was granted. The system should also have option to extend such			
B30. Final The system should have the provision for Final Bill Reconciliation Reconcili	B28.			Vital		
reconciliation Reconciliation, in case of permanent disconnection and provision for final amount adjustment. B31. Monthly report Module can close Ledger monthly and generate assessment variety of the provision of provision for final amount adjustment. B32. Last bill in case a customer requests for termination of connection, the system should accept the termination per reading (which will be out of cycle in most cases) for generating the last bill. B33. Provision for holding bill printing bill printing bill of a cycle unless cleared by bill quality check group. System shall have post billing filters to outsort abnormal bills based on logic, so that such bills are not printed/sent to consumer by any mode. B34. Bill distribution The system should have provision to generate optimal bill proute plan distributor route plan based on bill distribution jobs in a given generation area in a given cycle. System shall have provision to log leads of theit / misuse by: System shall have provision to log leads of their / misuse by: - Creating automatic leads based on consumption analysis and tamper analysis - Accepting lead through mail, website, phone calls, call centre or any other mode - Capturing the details of the lead contributor person, whether employee/countiedr - Assessment billing Public Hearing and bill revision - Payment and Settlement - Escalation & Legal module Provision of lead processing - workflow and life cycle tracking for: - Assessment billing - Public Hearing and bill revision - Provision of stallments - Case closure Collection of energy flow data from metering module Provision of Network reconfiguration in case of change in power flow logic Placeholders for allowable technical losses in the system Calculation of estimated technical and commercial losses in the system Generation of report of energy accounting and graphical analysis	B29.	•		Vital		
B32.	B30.		Reconciliation, in case of permanent disconnection and	Essential		
B33. Provision for holding bill printing till printing till checked based on logic, so that such bills are not printed/sent to consumer by any mode. B34. Bill distribution plan generation area in a given cycle. B35. Enforcement and Legal Module: Logging of leads	B31.			Vital		
holding bill printing till checked by system shall have post billing filters to outsort abnormal bills based on logic, so that such bills are not printed/sent to consumer by any mode. Bill distribution The system should have provision to generate optimal bill route plan distributor route plan based on bill distribution jobs in a given area in a given cycle. B35. Enforcement and Legal Module: Logging of leads - Creating automatic leads based on consumption analysis and tamper analysis - Accepting lead through mail, website, phone calls, call centre or any other mode - Capturing the details of the lead contributor person, whether employee/outsider B36. Enforcement and Legal Module: - Lead processing - Public Hearing and bill revision - Payment and Settlement - Escalation & Legal proceedings - Recovery of installments - Case closure B37 Energy audit Collection of energy flow data from metering module - Provision of graphical network diagram and network reconfiguration - Provision of Network reconfiguration in case of change in power flow logic - Placeholders for allowable technical and commercial losses in the system - Generation of report of energy accounting and graphical analysis	B32.		system should accept the terminating meter reading (which will			
route plan distributor route plan based on bill distribution jobs in a given generation area in a given cycle. B35. Enforcement and Legal Module : Logging of leads Capturing the details of the lead contributor person, whether employee/outsider and Legal Module : Lead Processing Public Hearing and bill revision B36. Enforcement and Legal Module : Lead Processing Public Hearing and bill revision Public Hearing and bill revision Payment and Settlement Recovery of installments Energy audit Collection of energy flow data from metering module Provision of Network reconfiguration in case of change in power flow logic Placeholders for allowable technical losses in the system Calculation of report of energy accounting and graphical analysis	B33.	holding bill printing till	bill of a cycle unless cleared by bill quality check group. System shall have post billing filters to outsort abnormal bills based on logic, so that such bills are not printed/sent to	Vital		
and Legal Module : Logging of leads	B34.	route plan	distributor route plan based on bill distribution jobs in a given	Desirable		
and Legal Module: Lead processing - Assessment billing - Public Hearing and bill revision - Payment and Settlement - Escalation & Legal proceedings - Recovery of installments - Case closure B37 Energy audit Collection of energy flow data from metering module Provision of graphical network diagram and network reconfiguration Provision of Network reconfiguration in case of change in power flow logic Placeholders for allowable technical losses in the system Calculation of report of energy accounting and graphical analysis	B35.	and Legal Module : Logging of	 Creating automatic leads based on consumption analysis and tamper analysis Accepting lead through mail, website, phone calls, cal centre or any other mode Capturing the details of the lead contributor person 			
Provision of graphical network diagram and network reconfiguration Provision of Network reconfiguration in case of change in power flow logic Placeholders for allowable technical losses in the system Calculation of estimated technical and commercial losses in the system Generation of report of energy accounting and graphical analysis	B36.	and Lega Module : Lead	 and life cycle tracking for : Assessment billing Public Hearing and bill revision Payment and Settlement Escalation & Legal proceedings Recovery of installments 	Desirable		
Generation of report of energy accounting and graphical analysis	B37	Energy audit	Provision of graphical network diagram and network reconfiguration Provision of Network reconfiguration in case of change in power flow logic Placeholders for allowable technical losses in the system Calculation of estimated technical and commercial losses	Vital		
			Generation of report of energy accounting and graphical analysis			

B38	New connection	Standardized formats and issue of form	Vital	
		Accepting application form		
		Accepting registration fee details		
		Generation of unique application no		
		Reconciliation of collection		
		Accepting customer details		
		Checking customer details		
		Handle special drives		
		Checking system capability for issuing connection		
		Inspection report generation		
		Generate Standard		
		Waiver of inspection		
		Accept inspection report and capture all details		
		Estimate preparation		
		Updating application status		
		Generating rejection letter		
		Generation of unique Service connection no		
		Generation of bill for issuing new connection		
		Generation of intimation letter		
		Multiple contract formats		
		Case by Case modifications to the contract		
		Accepting testing details		
		Interfacing with stores for meters		
		Monitoring of Meter installation		
		Generation of first bill		
		Integration with GIS and updation of database		
B39	Disconnection and dismantling	Generation of defaulting consumer list	Vital	
		Generation of disconnection list		
		Process of dispatching disconnection notices	1	
		Capturing of Non disconnection reasons		

Г	I		1		
		Creation of exception report on disconnection			
		Updation of customer status			
		Updation of dismantlement status for deduction from SD on auto Linkage with New Connection module			
		Tracking and escalation of disconnection failures			
		Termination of connection			
		Integration with stores system			
		Integration with GIS database			
		Exception reports on payment by disconnected consumers			
		Transfer of dues from one connection to other connection(s)			
	Centralized consumer services	Establishment of single window computerized customer care center Availability of required functionalities like billing, consumer indexing etc. on agent desktop	Vital		
		Single Interface for customer interactions			
		Customer Feedback			
		Agent ability			
CRM features		System ability to permit agents to extract information from system	Vital		
		System ability to provide CSR with defect management data			
		Billing details for six months			
		Option to send billing details by e-mail			
		Ability to view customer details			
		Ability to build FAQ database			
		Search option for most similar answer to FAQ	1		
		Report Generation module			
	Escalation system	Escalation policy to pre-specified higher authorities	authorities		
3,5.5		Escalation policy for automatic diversion			
	Other services	Complaint status enquiry	Vital		
		Payment reminders			
		New connection and other facilities			
		Lead generation and marketing of services			
		Group messaging system			

		Closing of complaints			
B41 Cosnumer porta and web sel service	Cosnumer portal	Home	Vital		
		Log In			
		Registration			
		Forgot Password			
		Security Question Answer			
		Change Password			
		My Accounts			
		Single Account			
		Consumption History			
		Consumption Calculator			
		Bill Summary			
		Online Billing Registration			
		View and Pay Bill	/ Bill		
		Pay Bill			
		Multiple Pay Bill			
		Manage Accounts			
		Service Requests			
		Service Request Status			
		Complain			
		Complaint Status			
		Report Power Failure			
		Report Street Light Outage			
		Update Profile			
		Commercial Information			
		Associated Sites			
		Contact Us			
		Privacy Policy			
B42	System security and integrity	Tracking key system accesses	Vital		
		Time-stamp based auditing method			

Exception reporting Detailed system access tracking Maintaining audit trails Vital User process protection Version consistency checks Versioning Modification of the system System maintenance Basic checks on data input Time stamping modifications Integrity of data passed over a communication channel Data transfer lock B43 Prepaid features It should accept meter consumption from MDM/EDM at a Vital specified interval. This interval should be configurable in the svstem It should have the ability to apply appropriate rate against the Vital consumption and calculate the charge accordingly Depending on requirement, the system should able to apply Vital different TOU rates for different time blocks in a day It should update the customer account based on the charge Vital calculated above and come out with the updated account balance with INR and KWH available for consumption The application should be able to calculate the remaining days Vital for charging based on average consumption against the customer account It should have the ability to push the information like Vital calculated charge, updated account balance, average remaining days available for charging etc., to the consumer portal system Based on configuration, it should be able to generate alarm Vital and notification through a user interface and / or portal solution if the available account balance reaches a threshold It should able to generate disconnection command to Vital EDM/MDM system if the customer account reaches a configurable threshold limit It should handle incentives and discount for a customer based Vital on different policies adopted at utility end The solution should able to push required information from Vital time to time to the Consumer portal system B44. Spot Billing System -B44.1 Downloading of The Spot Billing system shall enable meter reading activities Vital

	data in spot billing system	by transferring relevant consumer information data base from Billing system, like service numbers, address, area code, meter number, phase, load, MF, old meter reading, old status, category, arrears if any etc.		
B44.2	Uploading of data in spot billing system		Vital	
B44.3		The Spot Billing software to be resident in the HHE shall be based on the existing billing logic and algorithms of the Utility.	Vital	
B44.4	Tariff revision cases	The HHE should be able to calculate the tariff rates accordingly with the previous and present rates during the assessment period, so as to issue the on date calculated demand to consumers under tariff revision period including number of days, slab rates etc.	Vital	
B44.5		The HHE should prompt for entry of present meter reading. If meter reading is skipped, average/units consumed for previous month from the master shall be calculated/ retrieved and units for billing shall be displayed.	Vital	
B44.6	Entry of meter status	The HHE should prompt for entry of meter status and display of calculated units/Avg. Units (Avg. units is to be retrieved from the master data) depending upon the meter status.	Essential	
B44.7	Billing with charges / adjustments	The HHE shall prompt for any other adjustments/charges depending on the category of the consumer. Net bill is to be calculated after adjustment of above charges and should be displayed and prompt for printout shall be given.	Essential	
B44.8	Error checking	Extensive error checking shall be provided to assure data integrity during communications between the HHE and the PC.	Vital	
B44.9	Validation of meter reading data	,		
B44.10	Printing o summary report	Spot Billing system would print the summary report with HHC serial number, which contains the consumer file downloaded to the unit, total number of services, services billed / unbilled, total amount etc.	Desirable	
B44.11	Password protection	HHE shall have two levels of Password Protection - Supervisory level for functions of upload, download, time setting and other supervisory functions and Meter Reader level for starting and closing the meter reading.	Essential	
B44.12	Event logging	All events should be recorded in the event file in HHE. The event details should be downloadable for analysis.	Essential	
B44.13	Menu driven modular format	The spot billing software shall be user friendly, menu driven, structured and modular format for flexibility (Easy changes / Up gradation etc.)	Vital	
B44.14	Time stamping of logged data	Data Logging in the spot billing machine shall be date and time stamped.	Vital	
B44.15	Provision for enhancing the functionality	There should be a provision for enhancing the functionality of the software by adding additional features.	Essential	
B44.16	Time setting of HHE	The HHE shall have the facility to get its time set from Billing system only with proper security and password authentication.	Essential	

Annexure O Technical Specifications of Meter Box

<u>Technical Specifications for Polycarbonate Meter Box for Single Phase Meter</u>

1. SCOPE:

This specification covers the technical requirements of design, manufacture, testing at manufacturer's works, packing, forwarding, supply and unloading at store/site and performance of single phase meter box intended to contain one number single phase whole current energy meter complete with all accessories for trouble free and efficient operation.

2. APPLICABLE STANDARDS: -

The equipment covered by this specification shall unless otherwise stated, be designed, manufactured and tested in accordance with latest edition of the following Indian/International standards and shall conform to the regulations of the local statutory authorities.

a)		General requirements for enclosures for accessories for household and similar fixed electrical installations- specifications.
b)	`	Methods of test for determination of Flammability of solid electrical insulating material when exposed to an igniting source.
c)		Specification for classification and method of test for non- ignitable and self-extinguishing properties of solid electrical insulating materials.
d)	IS 5133(Part II)- 1969	Specification for boxes for the enclosure of electrical accessories.
e)	2000	Sampling procedure for inspection by attributes part-1 sampling schemes indexed by acceptance quality limit (AQL) for lot by lot inspection.
f)	UL 746-C	Polymeric Materials in Electrical equipment.

3. CLIMATIC CONDITIONS OF THE INSTALLATION:

The meter box shall be suitable for following conditions:-

- i) Minimum Ambient temperature: (-) 35°C.
- ii) Maximum Ambient temperature: 55°C.
- iii) Relative humidity: 26%
- iv) Maximum relative humidity: upto 95%v) Average Annual Rain fall: 150cm

4. GENERAL TECHNICAL REQUIREMENTS:

S. No	DESCRIPTION	REQUIREMENT
1	Application	Outdoor

IP 55 Degree of protection Flammability requirement 3 FVo Grade of material Polycarbonate with fire retardant, Self- Extinguishing, UV 4 stabilized and anti-oxidation properties. 5 The meter box (base and Cover) shall be made of Material a) Base: polycarbonate material which complies following properties; Meter box shall be weather proof, capable to withstanding b) Cover: temperatures of boiling water for 5 minutes continuously without distortion or softening. It shall withstanding Glow wire test at 650°C as per IS: 14772. Polycarbonate Lexan 943 A or equivalent Grade with dark grey color. Polycarbonate Lexan 943 A or equivalent Grade with Transparent configuration. Material of the gasket Rubber gasket 6 7 Material withstand 125 Deg C ± 2 Deg C temperature

5. GENERAL CONSTRUCTIONS:

5.1 The meter box shall be weather proof, tamper proof and shall be made of Injection moulded polycarbonate material with self-extinguishing, UV stabilized, recyclable and Anti oxidation properties. The box shall be of adequate strength, unbreakable and shall be made in two pieces (base and cover). The base shall be dark grey color whereas the cover shall be completely transparent.

The meter Box shall have roof tapering down to both sides for easy flow of rainwater.

The thickness of the box shall not be less than 3mm on the load bearing side and other sides, door and roof shall not be less than 2.5 mm.

The box shall be designed in such a way that there should be the following clearances between the meter and the Meter box:

- Between Sides of the meter body and meter box 30 mm minimum (excluding the flanges on the meter body for sealing screws.)
- Between lower edge of the terminal block and the Meter box 70 mm Minimum
- Between the back of the meter and the meter box base 10 mm Minimum
- Between the top of the meter and the meter box cover 20 mm Minimum

The meter box shall have a taper roof for easy flow of rain water and shall have degree of protection IP 55 for affording protection against dust & water.

- **5.2** The meter base supports inside the box should have adequate strong enough molded supports within the block to avoid damage during tightening of screws and raised by about 10 mm in the box for ease of wiring. While fixing, the meter screws should not protrude outside.
- 5.3 The design of the meter box shall be such that it may facilitate easy wiring and access to

the meter terminals. Nylon gland of internal diameter of approx. 20 mm shall be provided for I/C and O/G cables of size 2C x 16 sq. mm or as approved by the Utility.

- 5.4 The box cover shall be fixed to the base through two number hinges (approx length 30 60 mm). The arrangement for hinges shall be provided on the side of the base and shall be such that it may avoid unauthorized access to inside of the box. Hinges should be outside and enclosed by polycarbonate material and once the box is closed and sealed, hinges should not be approachable. Box cover shall be openable by more than 90 degrees.
- **5.5** For holding and sealing the box, two U-shaped latches shall be provided. The latch shall be GI sheet with minimum thickness 2 mm, to secure it with the base of the box. The latch shall be provided along with suitable clamp assembly in base as well as cover, such that these are fully covered by the latch after closing. The clamp along with the latch shall have a sealing hole such as to provide a through sealing arrangement in the assembly.
- 5.6 For fixing the box to flat wall or wooden board 4Nos. holes (2Nos.key holes at top) of minimum 6 mm dia. shall be provided at the four corners of the meter box. For fixing of Box on flat wall, 4 Nos. 5mm diameter 40mm long pan head self- taping screws and washers shall be provided by the supplier with every Box. 4 Nos. plastic fixing plugs of 50mm length suitable for self-tapping screws shall also be provided (Fixing clamp and accessories for pole mounting/ wall mounting, shall be in the scope of Agency, who shall be installing the meters in the field based on the actual site conditions & pole sizes. These are not to be supplied with the boxes).
- **5.7** Push button arrangement shall be required on the cover of the box to operate the meter display push button from outside the meter box to read the meter display parameters without opening the meter box cover.
- 5.8 A provision in form of depression should be provided on the meter box cover to download the meter data from the meter using the CMRI probe without opening the meter box cover. This shall be provided in such a way that the optical probe of the CMRI cable can be placed on top of the meter box cover in a suitable depression in the meter box cover which is aligned suitably with the meter optical port. Also the meter box cover shall have provision of sealing this depression. The depression so provided should be covered so that there is no physical access to the meter optical port while using this depression.
- **5.9** Suitable rubber gasket of round shape all around the cover along its periphery shall be provided for protection.
- **5.10** After closing and sealing the meter box, it should not be possible to allow entry of any sharp object even forcefully inside the box without breaking base/cover. Suitable overlapping (approx 10 mm) shall be provided between base and cover to avoid access to the meter or its accessories inside the meter box by any means after sealing the box.
- **5.11** The tolerance permissible in overall dimension of MCB shall be +/- 2%.

6. NAME PLATE AND MARKING:

i.

The following should be suitably marked /printed on the meter box indelibly.

"Electricity Department, Govt. of Puducherry" should be written on the top of Meter box

Manufacturer Name:

Year of manufacturing:

Utility's Logo:

Electrical Danger mark as per IE rules (Red in Colour):

P.O. No.:

7. Tests: All routine acceptance & type tests shall be carried out in accordance with the relevant IS/IEC. All routine & acceptance tests shall be witnessed by the Utility/ PFCCL authorized representative(s). All the components shall also be type tested as per the relevant standards. Following tests shall be necessarily conducted on the meter box in addition to others as specified in IS/IEC standards.

7.1 Type test:

S. No	Test/Standard	Requirement
1.	Protection against electric shock (IS:14772 -2000)	Enclosure shall be so designed that when it is mounted for normal use, the live parts of any correctly installed accessories or any parts of these accessories which may become live due to a fault shall not be accessible.
2.	Resistance to ageing, humid conditions, Ingress of solid objects and to harmful ingress of water (IS:14772 -2000)	Resistance to Ageing: Enclosure shall be kept in a heating cabinet with temp 70 ±2 °C for 7 days as per IS. After completion of the test, the enclosure shall not show any cracks. Humid conditions: Enclosure shall be kept in a cabinet with humidity between 91 to 95 % for 7 days as per IS. After completion of the test, enclosure shall not show any damage. Resistance against ingress of solid objects and to harmful ingress of water: Enclosure shall be subjected to test for degree of protection (IP 55) as per IS 12063.
3.	Mechanical strength/Impact Resistance Test (IS:14772 2000)/(UL:746C)	The sample shall be subjected to Impact resistance test as per the respective standards and shall not show occurrence of any of the following: 1.Making uninsulated live parts accessible to contact. 2. Producing a condition that might affect the mechanical performance of the enclosure. 3. Producing a condition that would increase the likelihood of an electric shock.
4.	Resistance to heat /Ball Pressure Test (IS:14772 - 2000)	The test shall be made on one sample in a heating cabinet at a temp of 125 ±2°C as per IS. After completion of test, the diameter of the impression caused by the ball shall be measured and should not exceed 2 mm.
5.	Resistance to Abnormal heat and fire/ Glow wire test (IS: 14772-2000)	Parts of insulating materials which might be exposed to thermal stresses due to electric effects shall not be affected by abnormal heat and by fire. The compliance shall be checked by means of the glow wire test performed at 650°C, according to IS 11000 (Part 2/section 1) with no flame and glowing.
6.	Resistance to Tracking (IS 14772-2000)	The sample when tested as per clause no 17 of IS: 14772, shall show no flashover after completion.

7. Flammability test (IS:.11731(Part The sample shall comply to flammability requirements of category FVO/ Vo as per respective standards. II) 1986)/U L:94) 8. Test for self-extinguishing The sample when tested as per clause 3.5.1 of IS 4249 shall comply to the specified requirements. Property (IS:4249-1967) 9. Test for water absorption (The sample shall be heated to a temperature of 50±3°C for 24 hours, as per IS and after completion, the water IS:5133 (Part-II)-1969) content absorbed should not be more than 1%. 10. IJV The sample when exposed to UV light as per the defined Light Exposure (ULtest method, shall comply to the following 746C) a) Physical Properties: The average value of physical properties after the UV light exposure shall not be lower than 70% of its initial value (without UV aging) i.e. the variation shall not be more than 30%. b) Flammability Test: After the UV light exposure, the flammability requirement of FVO shall remain unchanged. c) Flexural Strength: After the UV light exposure, Flexural strength shall not be lower than 70% of its initial value (without UV aging) i.e. the variation shall not be more than 30%.

7.2 Routine tests:

- 1. Marking
- 2. Visual Examination and Dimensions
- 3. Protection against electric shock

7.3 Acceptance tests:

- Marking
- 2. Visual Examination and Dimensions
- 3. Protection against electric shock
- 4. Mechanical strength/Impact Resistance Test
- 5. Resistance to Abnormal heat and fire / Glow wire test
- 6. Flammability test

8. PACKING:

Bidder shall ensure that all the equipment's covered under this specification shall be prepared for rail/road transport in a manner so as to protect the equipment's from damage in transit.

9. GUARANTEED TECHNICAL PARTICULARS:

No.	Particulars	Unit	Requirement	Bidders to confirm
1	Application		Outdoor	
2	Degree of protection		IP 55	
3	Flammability requirement		FVo	
4	Grade of Material		Polycarbonate with fire retardant, Self- Extinguishing, UV Stabilized and anti- oxidation properties.	
5	Material a) Base		a) Base: Polycarbonate Lexan 943 A or	

	b) Cover		equivalent Grade with dark grey colour b) Cover: Polycarbonate Lexan 943 A or equivalent Grade transparent	
6	Thickness of box a) Base & Cover	mm	Base : 3mm Cover 2.5 mm	
7	Material of the gasket		Rubber Gasket	
8	Material withstand temperature	°C	125°C	
10	Construction features of the box			
a)	Clearance from Meter surface : (minimum) Left , Right side : 30 mm Bottom : 70 mm Front & back : 10 mm Top : 20 mm			
b)	Display Push button operating arrangement at cover of the box			
d)	Sealing arrangement (with latch)		2 Nos.	
e)	Hinges		2 Nos.	
f)	Colour of Meter Box (Base & Cover)		Base : Dark Grey Cover : Transparent	
g)	No. of holes for fixing the meter box		4 Nos.	
h)	Total no. of fixing screws to be provided		4 Nos.	
i)	Overlapping length between base & cover	mm	Approx. 10 mm	
j)	Incoming & outgoing cable holes		2 Nos. to be provided	
k)	Weight of complete box in Kg. with +/- tolerance		Please confirm	
I)	Whether recyclable material		Please confirm	

Technical Specifications for Polycarbonate Meter Box for Three Phase Meter

1. SCOPE:

This specification covers the technical requirements of design, manufacture, testing at manufacturer's works, packing, forwarding, supply and unloading at store/site and performance of Three phase meter box intended to contain one number Three phase whole current energy meter complete with all accessories for trouble free and efficient operation.

2. APPLICABLE STANDARDS: -

The equipment covered by this specification shall unless otherwise stated, be designed, manufactured and tested in accordance with the latest edition of the following Indian/International standards and shall conform to the regulations of the local statutory authorities.

a)	IS: 14772-2000	General requirements for enclosures for accessories fo
		household and similar fixed electrical installations
		specifications.
b)	IS: 11731(Part-II) -	Methods of test for determination of Flammability of solid
	1992	electrical insulating material when exposed to an igniting
		source.
c)	IS 4249-1967	Specification for classification and method of test for non
		ignitable and self-extinguishing properties of solid electrical
		insulating materials.
d)	IS 5133(Part II)-1969	Specification for boxes for the enclosure of electrica
		accessories.
e)	IS 2500(Part 1)-2000	Sampling procedure for inspection by attributes part-1
		sampling schemes indexed by acceptance quality limit (AQL)
		for lot by lot inspection.
f)	UL 746-C	Polymeric Materials in Electrical equipment.

3. CLIMATIC CONDITIONS OF THE INSTALLATION:

The meter box shall be suitable for following conditions:-

i) Minimum Ambient temperature: (-) 35°C.

ii) Maximum Ambient temperature: 55°C.

iii) Relative humidity: 26%

iv) Maximum relative humidity: upto 95%v) Average Annual Rain fall: 150cm

4. GENERAL TECHNICAL REQUIREMENTS:

SI.	DESCRIPTION	REQUIREMENT
1	Application	Outdoor
2	Degree of protection	IP 55
3	Flammability requirement	FVo
		Polycarbonate with fire retardant, Self-
4	Grade of material	Extinguishing, UV stabilized and anti-oxidation

		properties.
5	Material a) Base: b) Cover:	The meter box (base and Cover) shall be made of polycarbonate material which complies following properties; Meter box shall be weather proof, capable to withstanding temperatures of boiling water for 5 minutes continuously without distortion or softening. It shall withstanding Glow wire test at 650°C as per IS: 14772. Polycarbonate Lexan 943 A or equivalent Grade with dark grey color. Polycarbonate Lexan 943 A or equivalent Grade with Transparent configuration.
6	Material of the gasket	Rubber gasket
7	Material withstand temperature.	125 Deg C ± 2 Deg C

5. GENERAL CONSTRUCTIONS:

5.1 The meter box shall be weather proof, tamper proof and shall be made of Injection moulded polycarbonate material with self-extinguishing, UV stabilized, recyclable and Anti oxidation properties. The box shall be of adequate strength, unbreakable and shall be made in two pieces (base and cover). The base shall be dark grey color whereas the cover shall be completely transparent.

The meter Box shall have roof tapering down to both the sides for easy flow of rainwater.

The thickness of the box shall not be less than 3mm on the load bearing side and other sides, door and roof shall not be less than 2.5 mm.

The box shall be designed in such a way that there should be the following clearances between the meter and the Meter box:

- Between Sides of the meter body and meter box 30 mm minimum (excluding the flanges on the meter body for sealing screws.)
- o Between the lower edge of the terminal block and the Meter box 70 mm Minimum
- Between the back of the meter and the meter box base 10 mm Minimum
- Between the top of the meter and the meter box cover 30 mm Minimum

The meter box shall have a taper roof for easy flow of rain water and shall have degree of protection IP 55 for affording protection against dust & water.

- **5.2** The meter base supports inside the box should have adequate strong enough molded supports within the block to avoid damage during tightening of screws and raised by about 10 mm in the box for ease of wiring. While fixing, the meter screws should not protrude outside.
- **5.3** The design of the meter box shall be such that it may facilitate easy wiring and access to the meter terminals. Nylon gland of internal diameter of approx. 30 mm shall be provided for

I/C and O/G cables of size 4C x 35 sq. mm or as approved by the Utility.

- 5.4 The box cover shall be fixed to the base through two number hinges (approx. length 30 60 mm). The arrangement for hinges shall be provided on the side of the base and shall be such that it may avoid unauthorized access to inside of the box. Hinges should be outside and enclosed by polycarbonate material and once the box is closed and sealed, hinges should not be approachable. Box cover shall be openable by more than 90 degrees.
- **5.5** For holding and sealing the box, two U-shaped latches shall be provided. The latch shall be GI sheet with minimum thickness 2 mm, to secure it with the base of the box.. The latch shall be provided along with suitable clamp assembly in base as well as cover, such that these are fully covered by the latch after closing. The clamp along with the latch shall have a sealing hole such as to provide a through sealing arrangement in the assembly.
- 5.6 For fixing the box to flat wall or wooden board 4Nos. holes (2Nos.key holes at top) of minimum 6 mm dia. shall be provided at the four corners of the meter box. For fixing of Box on flat wall, 4 Nos. 5mm diameter 40mm long pan head self- taping screws and washers shall be provided by the supplier with every Box. 4 Nos. plastic fixing plugs of 50mm length suitable for self-tapping screws shall also be provided (Fixing clamp and accessories for pole mounting/ wall mounting, shall be in the scope of Agency, who shall be installing the meters in the field based on the actual site conditions & pole sizes. These are not to be supplied with the boxes).
- **5.7** Push button arrangement shall be required on the cover of the box to operate the meter display push button from outside the meter box to read the meter display parameters without opening the meter box cover.
- 5.8 A provision in form of depression should be provided on the meter box cover to download the meter data from the meter using the CMRI probe without opening the meter box cover. This shall be provided in such a way that the optical probe of the CMRI cable can be placed on top of the meter box cover in a suitable depression in the meter box cover which is aligned suitably with the meter optical port. Also the meter box cover shall have provision of sealing this depression. The depression so provided should be covered so that there is no physical access to the meter optical port while using this depression.
- **5.9** Suitable rubber gasket of round shape all around the cover along its periphery shall be provided for protection.
- **5.10** After closing and sealing the meter box, it should not be possible to allow entry of any sharp object even forcefully inside the box without breaking base/cover. Suitable overlapping (approx 10 mm) shall be provided between base and cover to avoid access to the meter or its accessories inside the meter box by any means after sealing the box.
- **5.11** The tolerance permissible in overall dimension of MCB shall be +/- 2%.

6. NAME PLATE AND MARKING:

The Purchase order No. & Date, Month & Year of manufacture and the word "DANGER" (with red color) shall be engraved/printed or marked on the top cover of the box. The manufacturer's name &"Property of Electricity Department, Govt. of Puducherry" shall be engraved/printed or marked on the bottom half of the box such that it shall not be removed

easily. Nameplate will be made of Aluminum sheet & fixed through rivets.

7. Tests: All routine acceptance & type tests shall be carried out in accordance with the relevant IS/IEC. All routine & acceptance tests shall be witnessed by the PFCCL/ Utility authorized representative(s). All the components shall also be type tested as per the relevant standards. Following tests shall be necessarily conducted on the meter box in addition to others as specified in IS/IEC standards.

7.1 Type test:

S.	Test/Standard	Requirement
No 1.	Protection against electric	Enclosure shall be so designed that when it is mounted fo
	shock (IS:14772 -2000)	normal use, the live parts of any correctly installed accessories or any parts of these accessories which may become live due to a fault shall not be accessible.
2.	Resistance to ageing, humid conditions, Ingress of solid objects and to harmful ingress of water	Resistance to Ageing: Enclosure shall be kept in a heating cabinet with temp 70 ±2 C° for 7 days as per IS. Afte completion of the test, the enclosure shall not show any cracks.
	(IS:14772 -2000)	Humid conditions: Enclosure shall be kept in a cabine with humidity between 91 to 95 % for 7 days as per IS After completion of the test, enclosure shall not show any damage.
		Resistance against ingress of solid objects and to harmful ingress of water: Enclosure shall be subjected to test for degree of protection (IP 55) as per IS 12063.
3.	Mechanical strength/Impact Resistance Test (IS:14772 2000)/(UL:746C)	The sample shall be subjected to Impact resistance tes as per the respective standards and shall not show occurrence of any of the following: 1. Making uninsulated live parts accessible to contact. 2. Producing a condition that might affect the mechanical performance of the enclosure. 3. Producing a condition that would increase the likelihood of an electric shock.
4.	Resistance to heat /Ball Pressure Test (IS:14772 -2000)	The test shall be made on one sample in a heating cabinet at a temp of 125 ±2°C as per IS. After completion of test, the diameter of the impression caused by the ball shall be measured and should not exceed 2 mm.
5.	Resistance to Abnormal heat and fire/ Glow wire test (IS: 14772-2000)	Parts of insulating materials which might be exposed to thermal stresses due to electric effects shall not be affected by abnormal heat and by fire. The compliance shall be checked by means of the glow wire test performed at 650°C, according to IS 11000 (Part 2/section1) with no flame and glowing.
6.	Resistance to Tracking (IS 14772-2000)	The sample when tested as per clause no 17 of IS: 14772 shall show no flashover after completion.

7.	Flammability test (IS:.11731(Part II) 1986)/U L:94)	The sample shall comply to flammability requirements of category FVO/ Vo as per respective standards.
8.	Test for self-extinguishing Property (IS:4249-1967)	The sample when tested as per clause 3.5.1 of IS 4249 shall comply to the specified requirements.
9.	Test for water absorption (IS:5133 (Part-II)-1969)	The sample shall be heated to a temperature of 50±3°C for 24 hours, as per IS and after completion, the water content absorbed should not be more than 1%.
10.	UV Light Exposure (UL-746C)	The sample when exposed to UV light as per the defined test method, shall comply to the following a) Physical Properties: The average value of physical properties after the UV light exposure shall not be lower than 70% of its initial value (without UV aging) i.e. the variation shall not be more than 30%. b) Flammability Test: After the UV light exposure, the flammability requirement of FVO shall remain unchanged. c) Flexural Strength: After the UV light exposure, Flexural strength shall not be lower than 70% of its initial value (without UV aging) i.e. the variation shall not be more than 30%.

7.2 Routine tests:

- 1. Marking
- 2. Visual Examination and Dimensions
- 3. Protection against electric shock

7.3 Acceptance tests:

- 1. Marking
- 2. Visual Examination and Dimensions
- 3. Protection against electric shock
- 4. Mechanical strength/Impact Resistance Test
- 5. Resistance to Abnormal heat and fire / Glow wire test
- 6. Flammability test

8.0 PACKING:

Bidder shall ensure that all the equipment's covered under this specification shall be prepared for rail/road transport in a manner so as to protect the equipment's from damage in transit.

9.0 GUARANTEED TECHNICAL PARTICULARS:

No.	Particulars	Unit	Requirement	Bidders to confirm
1	Application		Outdoor	
2	Degree of protection		IP 55	
3	Flammability requirement		FVo	
4	Grade of Material		Polycarbonate with fire retardant, Self-	
			Extinguishing, UV	

No.	Particulars	Unit	Requirement	Bidders to confirm
			Stabilized and anti-	
5	Material c) Base d) Cover		oxidation properties. Base : Polycarbonate Lexan 943 A or equivalent Grade	
			with dark grey colour Cover : Polycarbonate Lexan 943 A or equivalent Grade transparent	
6	Thickness of box a) Base & Cover	mm	Base : 3mm Cover 2.5 mm	
7	Material of the gasket		Rubber Gasket	
8	Material withstand temperature	°C	125°C	
10	Construction features of the box			
а	Clearance from Meter surface: (minimum) Left, Right side: 30 mm Bottom: 70 mm Front & back: 10 mm Top: 30 mm			
b	Display Push button operating arrangement at cover of the box			
d	Sealing arrangement (with latch)		2 Nos.	
е	Hinges		2 Nos.	
f)	Colour of Meter Box (Base & Cover)		Base : Dark Grey Cover: Transparent	
g	No. of holes for fixing the meter box		4 Nos.	
h	Total no. of fixing screws to be provided		4 Nos.	
i)	Overlapping length between base & cover	mm	Approx. 10 mm	
j)	Incoming & outgoing cable holes		2 Nos. to be provided	
k)	Weight of complete box in Kg. with +/- tolerance		Please confirm	
l)	Whether recyclable material		Please confirm	

TECHNICAL SPECIFICATION OF METER BOX FOR HT METERS

For HT Meters, the specifications of Meter Box for Three Phase Meters may be used.

TECHNICAL SPECIFICATION OF SMC BOX FOR LT CT SMART METER & CURRENT TRANSFORMERS

1. SCOPE:

- 1.1. The specification covers the manufacture, testing, and supply of moulded Meter Box of excellent weather ability to house LT CT operated three phase four wire static energy meter and LT CT"s to offer protection against harsh weather, external hazards and internal hazards having anti-corrosive, dust proof, shock proof, rust proof, vermin and waterproof and fireproof, UV stabilized and pilfer proof. The Boxes should be suitable for indoor and outdoor installations confirms to ingress protection level IP-55 and shall not deform or melt when exposed to fire.
- 1.2. It should also conform as per the technical requirements, as per indicative drawing.
- 1.3. It shall consist of 2 compartments. The upper compartment is meant for housing 1 No. Static Three phase four wire meter, modem and antenna and the lower compartment are for housing 4 Nos. Current Transformers (CTs.).
- 1.4. AMISP shall also provide four no. Epoxy Resin Cast CTs, control cables, clamps, terminal block, etc. as required.

2. MATERIAL OF METERBOX:

2.1. The Boxes must be weatherproof made out of Thermo setting Plastic SMC (Sheet Molding Compound) confirming to IS: 13410: 1992 with flame retardant properties, mechanical and corrosion resistant properties. The overall dimension of double compartment Box to accommodate a L.T. C.T. Operated three phase four wire Static Energy Meter, with Modem in upper compartment and four CTs. in lower compartment should be as below: -

	HEIGHT (H)	WIDTH (W)	DEPTH (D)
	Minimum (mm)	Minimum (mm)	Minimum (mm)
Upper Compartment for housing meter	420	350	230
Lower Compartment for housing CTs.	430	350	230
Overall dimension	850	350	230

- 2.2. These should be capable of withstanding temperatures of boiling water for 5 minutes continuously without distortion or softening. The thickness of the box shall not be less than 2.5 mm on all sides including door. The Box shall have 4 mm thickness on the tongue and groove area. The Meter Box cover shall have a groove to hold minimum of 2.5 mm. Neoprene gasket. The tongue of the base shall ensure tongue, Groove and sealing arrangement against rainwater and dust entering inside the Box. Other better arrangement can also be offered subject to purchaser's approval. The Box shall have its roof tapering down for easy flow of water.
- 2.3. The Boxes shall generally comply with the provision of IS: 14772: 2000. The Boxes shall be suitable for outdoor/indoor application. The Box shall be with good workmanship. There should be a minimum of 50 mm. clearances on all sides and 25 mm. clearances on the front and 10 mm. clearances on the back of the meter.
- 2.4. Soft rubber gaskets shall be provided all rounds wherever required protection against entry of dust and water.
- 2.5. The Box shall be off white.

3. CONSTRUCTION: -

The contents of the box are as follow:

- 3.1. **Viewing Window:** The viewing window made up of a scratch and break resistant, UV resistant, transparent polycarbonate and shall be provided on the door for reading the meter without inconvenience. The minimum thickness of the viewing window shall be 2.0 mm. The window shall be ultra-sonically welded with meter box from inside. There should not be any ingress of moisture through this window into the box OR in case of toughened glass fixing arrangement may be provided as per design.
- 3.2. **Internal Hinges:** A minimum of 2 Nos. Brass internal hinges on each door well protected against corrosion shall be provided. The hinges of the door should be concealed, and they shall be fixed to flanges provided to the base and cover of the box in such a manner that the door opened by minimum 120degrees.
- 3.3. **Earthing Bolt**: 8 mm. dia G.I. Bolt 20 mm lengths with 2 Nos. nuts and 2 nos. washers for earthing all metal parts used for fixing the meter shall be provided.
- 3.4. **Fixing arrangement**: The top compartment of the box should be used for the three phase four wire energy meter, modem and antenna. The meter shall be mounted on SMC sheet of 4 mm. thickness with suitable metallic screws and the screws shall not be protrude outside of the box. The meter base supports inside the box are raised by minimum 10 mm. in the box for ease of wiring. While fixing the meter, Screws should not protrude outside. The meter box shall have 4 Nos. of wall mounting bracket made out of SMC with proper screw to fix with the bottom base and provision and provision for 6 mm. dia-hole for mounting the SMC Meter Box on a Pole with suitable screws. The fixing shall not be complex and shall be easily approachable for connections when the door(s) in open condition and is completely tamper proof once it is sealed.
- 3.5. Similarly, SMC shall be provided for mounting four nos. LT CT"s in lower compartment box. Separate doors for each compartment should be provided. Suitable handle/ knobs shall be provided on both the doors.
- 3.6. **Latch:** The door shall be provided with a G.I. latch or "U" clamp to secure it with the base of the
- 3.7. **Sealing arrangement:** The box shall have provision for minimum 2 Nos. seals to make it fully tamperproof.
- 3.8. **Inlet and Outlet:** 4 Nos. holes with superior quality rubber cable glands shall be provided on both sides of the lower compartment of the box for cable entry. Internal diameter for incoming / outgoing gland shall be suitable for power cable.
 - Similarly, 4 Nos. holes with superior quality rubber cable glands shall be provided in the Partition sheet of upper & lower compartments of the cubicle for entry of secondary wires of CTs. Internal diameter for gland used in partition sheet shall be 15mm. Glands shall be made such that internal diameter of glands provided for cables should be closed with the film of minimum 1mm thickness. Cable will go through the cable glands by piercing the film of the glands. Cable glands shall be fixed with suitable adhesive so that the same does not get removed.
- 3.9. Printing: Metallic label containing the letters "DISCOM NAME" and the purchase order and date shall be engraved in the top cover of the Box. The name of the manufacturer shall be engraved on the bottom of half of the box. A blank sticker shall also be fixed on the meter box for use of field staff to indicate the service No., Meter constant, CT ratio etc.
- 3.10. **Sample Meter Box:** One sample of meter box as per specification and drawing should be submitted before commencement of the supply.

- 3.11. **Tests:** The double compartment LT CT meter box and material of meter box shall be subject to type test confirming to relevant IS: 13410: 1992, IS: 14772, IS: 4249 and IS: 11000 (Part 2 Section -1).
- 4. General technical details of L.T. current transformer for use in connection with L.T. C.T. operated energy metering are as follows:
 - 4.1. C.T. shall confirm to IS:2705/1992 or its latest version thereof.
 - 4.2. Current transformer should be resin cast, ring type construction. Construction shall be single phase single core type. The internal diameters of the C.T. shall be approved by employer.
 - 4.3. CT current ration shall be approved by Project Manager.
 - 4.4. Suitable mounting robust clamp as per manufacturer design shall be provided.
 - 4.5. Secondary terminal shall be of brass stud type. The size shall be minimum 6.0 mm dia 20 mm outside length with spring washer and double nuts.
 - 4.6. Rated voltage shall be Single Phase 240 V line to neutral (+15% to -30%)
 - 4.7. Accuracy class of 0.5 as per IS.
 - 4.8. Rated burden shall be of 5VA.
 - 4.9. The instrument security factor shall be less than or equal to 5.
 - 4.10. Rated short time current of 5 KA for 1 sec. Corresponding to rated dynamic peak current of 2.5 x 5 KA (peak).
 - 4.11. The ratio, name of manufacture / monogram and year of manufacturing shall be engraved on the body of C.T. In addition, name plate of anodized aluminum indicating the necessary details, year of manufacture etc. engraved on it shall be provided in such a manner that the information is clearly visible after mounting.
 - 4.12. The secondary and primary terminals shall be clearly marked as S1 &S2.
 - 4.13. The bidders should submit the drawings of offered CTs before commencement of Supply.

PART II

Contract

For

Appointment of Advanced Metering
Infrastructure (AMI) Service Provider
for
Implementation of Smart Prepaid
Metering

in UT of Puducherry

Between
PFC CONSULTING LTD.
AND

[SPV incorporated by Selected Bidder]

AND

[Selected Bidder]

TABLE OF CONTENTS

Article/ Clause	353
1. Definitions and Interpretations	353
2. The Contract	
3. Obligations of the Selected Bidder in case an SPV has been formed.	358
4. Rights, Title and Interest to AMI System and Equipment	359
5. Contract Price and Payment	360
6. Performance Security	363
7. Liquidated Damages, Penalty and Incentive	364
8. SLAs and SLA Audit	366
9. Force Majeure	
10. Intellectual Property	371
11. Termination	372
12. Liability/ Indemnity	385
13. Governing Laws and Settlement of Disputes	387
14. Change Order	389
15. Miscellaneous	393
16.Confidential Information	396
17. Subcontracting	397
18. Warranty	398
19. Change in Laws and Regulations	399
20. Severability	399
21. Language	400
22. Assignment	400
23. Entire Agreement	400
24. Disclaimer	401
25. Public Disclosure	401
26. Adherence to Safety Procedures, Rules, Regulations and Restriction	401
27. Survival	402
28. Notices	402
III. Special Conditions of Contract	404

03.12.2021

A. Form of Contract

(Applicable in the event SPV incorporated by Selected Bidder)

THIS Contract (hereinafter referred to as "Contract") executed on this [date] day of [month], [year] :
BETWEEN:
PFC Consulting Ltd. (hereinafter referred to as " PFCCL " which expression shall unless repugnant to the context or meaning thereof include its successors, assigns and permitted substitutes), a company incorporated under the extant provisions of Indian Laws and having its registered office at 1 st Floor, Urjanidhi, Barakhamba Lane, Connaught Place, new Delhi - 110001;
AND
AND
< insert the following if the Selected Bidder identified pursuant to the RFP is Sole Bidder>
, < insert the name of Selected Bidder> having its registered office at
< insert the following in case the Selected Bidder identified pursuant to the RFP is a Consortium >
WHEREAS PFCCL had invited Bids for Appointment of Advanced Metering Infrastructure ("AMI") Service Provider ("AMISP") for implementation of Smart Prepaid Metering in UT of Puducherry (the "Project") through RFP No. Smart_Metering/Puducherry/2021 dated

WHEAREAS after evaluation of the Bids received from the Bidders, PFCCL accepted the Bid of the Selected Bidder, and issued its Letter of Award No. [_____] dated [_____] ("LOA") to the Selected Bidder, requiring the Selected Bidder, inter alia, to execute this Contract within the time period prescribed in the RFP.

WHEAREAS the Selected Bidder has since promoted and incorporated such a special purpose vehicle as the AMISP under the Companies Act, 2013 in accordance with the terms of the RFP, and has requested PFCCL to accept the AMISP as the entity which shall undertake and perform the obligations and exercise the rights of the Selected Bidder under

WHEAREAS the AMISP, by its letter dated [_____], while representing that it has been promoted by the Selected Bidder for the purposes hereof, joined in the request of the Selected Bidder to PFCCL to accept the AMISP as the entity which shall undertake and perform the obligations and exercise the rights of the Selected Bidder including the obligation to enter into this Contract pursuant to the Letter of Award (LOA).

the LOA, including the obligation to enter into this Contract for implementation and Operation

NOW, THEREFORE, in consideration of the foregoing and the respective covenants and agreements set forth in this Contract, the receipt and sufficiency of which is hereby acknowledged, and intending to be legally bound hereby, the Parties agree as follows:

- 1. The following documents attached hereto shall be deemed to form an integral part of this Contract:
 - (a) The General Conditions of Contract (including Attachment 1 "Fraud and Corruption";
 - (b) The Special Conditions of Contract;

& maintenance of the AMI system in the Project area.

(c) Appendices:

Appendix A: Project Requirements (AMI System Requirements and Service Level Agreement)

Appendix B: AMISP Contract Value

(d) Technical and Financial Bid as submitted by the Selected Bidder

In the event of any inconsistency between the documents, the following order of precedence shall prevail: the Special Conditions of Contract; the General Conditions of Contract, including amendments thereto [.... Insert reference to amendments....]; Appendix A and Appendix B; and Technical and Financial Bid as submitted by the Selected Bidder. Any reference to this Contract shall include, where the context permits, a reference to its Appendices also.

IN WITNESS WHEREOF, the AMISP, the Selected Bidder and PFCCL, executed these

presents and affixed common seals of their respective com Year first mentioned above.	panies on the Day, Month and
Common Seal of PFCCL has been affixed in my/ or Resolution dated For Utility	ur presence pursuant to Board
[Signature of Authorized Representative]	
[Name of the Authorized Representative] [Designation of the Authorized Representative]	
Common Seal of [Name of the Lead Consthas been affixed in my/ our presence pursuant	
For [Selected Bidder]	
[Name of the Lead Consortium Member/ Sole Bidder] [Signature of Authorized Representative]	ļ,
[Name of the Authorized Representative] [Designation of the Authorized Representative]	
Common Seal of	
[Name of the AMISP], [Signature of Authorized Representative]	
[Name of the Authorized Representative] [Designation of the Authorized Representative]	
WITNESS:	
1	(Signature) Name

Designa	ation		
	ation	(Signature) N	ame
Attested:			
[Signature] (Notary Put			
Place:		Date:	

B. Form of Contract

(Applicable in the event SPV is not incorporated by the Sole Selected Bidder)

THIS Contract (hereinafter referred to as "Contract") executed on this [date] day of [month], [year] :
BETWEEN:
PFC Consulting Ltd. (hereinafter referred to as " PFCCL " which expression shall unless repugnant to the context or meaning thereof include its successors, assigns and permitted substitutes), a company incorporated under the extant provisions of Indian Laws and having its registered office at 1 st Floor, Urjanidhi, Barakhamba Lane, Connaught Place, new Delhi - 110001;
AND
, < insert the name of Selected Bidder, being the Sole Bidder > having its registered office at [Registered address of the Company] (hereinafter referred to as the "AMISP" which expression shall unless repugnant to the context or meaning thereof include its successors, assigns and permitted substitutes).
WHEREAS PFCCL had invited Bids for Appointment of Advanced Metering Infrastructure ("AMI") Service Provider ("AMISP") for implementation of Smart Prepaid Metering in UT of Puducherry (the "Project") through RFP No dated
WHEAREAS after evaluation of the Bids received from the Bidders, PFCCL accepted the Bid of the Selected Bidder, and issued its Letter of Award No. [] dated [] ("LOA") to the AMISP, requiring the Selected Bidder, inter alia, to execute this Contract within the time period prescribed in the RFP. WHEAREAS the AMISP,in accordance with the terms of the RFP, shall undertake and perform the obligations and exercise the rights under the LOA, including the obligation to enter into this Contract for implementation and Operation & maintenance of the AMI system in the Project area.
NOW, THEREFORE, in consideration of the foregoing and the respective covenants and

agreements set forth in this Contract, the receipt and sufficiency of which is hereby

acknowledged, and intending to be legally bound hereby, the Parties agree as follows:

- 1. The following documents attached hereto shall be deemed to form an integral part of this Contract:
 - (a) The General Conditions of Contract (including Attachment 1 "Fraud and Corruption";
 - (b) The Special Conditions of Contract;
 - (c) Appendices:

[Signature of Authorized Representative]

1.

Appendix A: Project Requirements (AMI System Requirements and Service Level Agreement)

Appendix B: AMISP Contract Value

(d) Technical and Financial Bid as submitted by the Selected Bidder

In the event of any inconsistency between the documents, the following order of precedence shall prevail: the Special Conditions of Contract; the General Conditions of Contract, including amendments thereto [.... Insert reference to amendments....]; Appendix A and Appendix B; and Technical and Financial Bid as submitted by the Selected Bidder. Any reference to this Contract shall include, where the context permits, a reference to its Appendices also.

IN WITNESS WHEREOF, the AMISP and PFCCL, executed these presents and affixed common seals of their respective companies on the Day, Month and Year first mentioned above.

Common Seal of PFCCL has been affixed in my/ our presence pursuant to Board

Fo	Resolution dated or Utility
[Si	ignature of Authorized Representative]
-	ame of the Authorized Representative] esignation of the Authorized Representative]
3.	Common Seal of
	[Name of the Sole Bidder/ AMISP],

[Name of the Authorized Representative] [Designation of the Authorized Representative]			
WITNESS:			
3	(Signature) Name		
Designation			
4	(Signature) Name		
Designation			
Attested:			
[Signature] (Notary Public)			
Place:	Date:		

II. General Conditions of Contract

Article/ Clause

1. Definitions and Interpretation s

(a) Definitions

- 1.1 In this Contract, unless the context otherwise requires, the following words, expressions and abbreviations shall have the following meanings:
- (a) "Advanced Metering Infrastructure" or "AMI" means an integrated system of Smart Meters, communication networks and meter data management systems that enables twoway communication between the utilities and consumer premises equipment. The functional blocks of AMI typically include HES — Head End System, WAN — Wide Area Network, NAN — Neighbourhood Area Network, DCU — Data Concentrator Unit / Gateway and HAN — Home Area Network;
- (b) "Advanced Metering Infrastructure Service Provider" or "AMISP", means the responsible implementation agency named in SCC appointed by PFC Consulting Ltd. (PFCCL) for designing, building, financing, owning, operating and transferring the AMI Project in its area of operation upon execution of the Contract subsequent to the Letter of Award referred to in SCC:
- (c) "Affected Party" means any of the AMISP or PFCCL whose performance has been affected by an event of Force Majeure or Force Majeure Event;
- (d) **Deleted**.
- (e) "Applicable Laws" shall mean the laws and any other instruments having the force of law in India as they may be issued and in force from time to time:
- (f) "Bid" means the bid submitted by the Bidder(s) in response to the RFP and shall

- include the Technical Bid and the Financial Bid;
- (g) "Bidder(s)" means individual entity or consortium of entities bidding in response to the RFP;
- (h) "Change Order" shall have the meaning as ascribed thereto in Article 14 of this Contract;
- (i) "Consortium Member" Any member of the bidding consortium other than the Lead Consortium Member;
- (j) "AMISP Contract" or "Contract" shall mean this Contract entered into between, the SPV incorporated by the Selected Bidder (if applicable and so indicated in SCC), Selected Bidder (represented by the Lead Member acting for and on behalf of the consortium if the Selected Bidder is a consortium) and PFCCL for undertaking the AMI Project and is the legally binding written agreement signed by the Parties and which includes all the attached documents listed in its paragraph 1 of the Form of Contract (the General Conditions (GCC), the Special Conditions (SCC), and the Appendices, Attachments, Annexures etc.).
- (k) "Contract Period" or "Term of the Contract" shall have the meaning as ascribed thereto in Article 2.1.2 of this Contract;
- (I) "Contract Price" shall have the meaning as ascribed thereto in Article 5.1 of this Contract;
- (m) "Day" means a calendar day unless indicated otherwise:
- (n) "Exit Management Period" shall mean the transition period encompassing the time from the date of termination of the Contract or end of the Contract Period until the date upon which all transition activities/ services are completed by the AMISP;
- (o) "Force Majeure" or "Force Majeure Event" shall have the meaning as ascribed thereto in Article 9 of this Section;
- (p) "GCC" means these General Conditions of Contract.
- (q) "Goods" means any good(s) supplied or to be

- supplied as a part of the Solution by the AMISP;
- (r) "Independent Valuer" shall mean a qualified valuer duly registered under Companies (Registered Valuers and Valuation) Rules, 2017 for Plant and Machinery and jointly appointed by the Parties in the event of termination prior to Installation Milestone;
- (s) "Lender" means the banks. financial institutions, multilateral funding agencies, nonbanking financial companies registered with the Reserve Bank of India (RBI), insurance companies registered with the Insurance Regulatory & Development Authority (IRDA), pension funds regulated by the Pension Fund Regulatory & Development Authority (PFRDA), mutual funds registered with Securities & Exchange Board of India (SEBI), etc., including their successors and assigns, who have agreed to provide the AMISP with the debt financing, and any successor banks or financial institutions to whom their interests may be transferred or assigned:
- (t) "Month" means a calendar month unless indicated otherwise:
- (u) "Operational Go Live" shall have the meaning ascribed thereto in Clause 9.6 of Section 6:
- (v) "Operational Period" means the period from the Operational Go-Live till the end of the Contract Period:
- (w) "Project or AMI Project" means the PFCCL's AMI Project defined in recital clause in the Contract Form;
- (x) "Project Implementation Schedule" shall have the meaning ascribed thereto in Clause 12 of Section 6:
- (y) "Request for Proposal" or "RFP" means the Tender of which the number, name and details have been mentioned in SCC, including all its Volumes/ Sections/ Forms/ Annexures/ Appendices etc., for Appointment of AMISP (including all clarification/ addendum/

- amendment/ corrigendum/ etc. issued from time to time);
- (z) "Rupees" or "Rs." Or "INR" or "₹" means Indian Rupees;
- (aa) "SCC" means the Special Conditions of Contract by which the GCC may be amended or supplemented.
- (bb) "Service(s)" or "Related Service(s)" means any service(s) performed or to be performed as a part of the Solution by the AMISP;
- (cc) SLA Default Notice means notice to be issued by the Utility in the event AMISP fails meet any of the criteria specified in the SLA for cumulatively 3 (three) months in past 6 (six) months so as to entitling levy of maximum penalty for such criteria;
- (dd) "Smart Meter" shall mean and is an ac static watt-hour meter with time of use registers. internal connect and disconnect switches with two-way communication capability. designed to measure flow of forward (import) or both forward (import) and reverse (export), store and communicate the same along with other parameters defined in this standard. It shall be remotely accessed for collecting programming data/events, for select parameters (as defined in IS 16444 including any amendments or modifications to the same from time to time);
- (b) Interpretation
- (ee) "Solution" shall mean the AMI system implemented in its entirety including but not limited to the designing, financing, supply of hardware, software, transportation, installation, integration, testing, commissioning, operation, maintenance, training and other services by the AMISP;
- (ff) "Termination Payment" shall have the meaning as ascribed thereto in Article 11 of GCC in Section 7;
- (gg) "**Utility**" shall mean Electricity Department, Union Territory of Puducherry.
- (hh) Deleted

- (ii) Deleted
- (jj) "Installation Milestone" shall have the meaning as ascribed thereto in Clause 12 of Section 6;
- 1.2 In the interpretation of this Contract, unless the context otherwise requires:
- 1.2.1. PFCCL, the Selected Bidder, and the AMISP/ Contractor shall individually be referred to as "Party" and collectively as "Parties."
- Unless otherwise specified a reference to an Article number is a reference to all of its subarticles;
- 1.2.3. Unless otherwise specified a reference to a clause, sub-clause or section is a reference to a clause, sub-clause or section of this Contract including any amendments or modifications to the same from time to time;
- 1.2.4. A word in the singular includes the plural and a word in the plural includes the singular;
- 1.2.5. A word importing a gender includes any other gender;
- 1.2.6. A reference to a person includes a partnership and a body corporate;
- 1.2.7. A reference to legislation includes legislation repealing, replacing or amending that legislation;
- 1.2.8. Where a word or phrase is given a particular meaning, it includes the appropriate grammatical forms of that word or phrase which has a corresponding meaning;
- 1.2.9. In the event of an inconsistency between the terms of the RFP, Bid submitted by the Selected Bidder and the subsequent Contract, the terms of the Contract hereof shall prevail;
- 1.2.10. Whenever a material or article is

specified or described by the name of a particular brand, manufacturer or trademark, the specific item shall be understood as establishing type, function and quality desired. Products of other manufacturers may also be considered, provided sufficient information is furnished so as to enable PFCCL to determine that the products are equivalent to those named.

- 1.2.11. No amendment or other variation of this Contract shall be valid unless it is in writing, is dated, expressly refers to this Contract, and is signed by a duly authorised representative of both PFCCL and the AMISP thereto.
- 1.2.12. Deleted.
- 2. The Contract
- (a) Effectiveness and Term
- 2.1. EFFECTIVENESS AND TERM
- 2.1.1. This Contract shall come into force and effect on the date of execution of the Contract by the Parties:
- 2.1.2. Unless terminated earlier by either Party or extended by PFCCL in accordance with the terms of this Contract, this Contract shall continue in full force and effect until the earlier of (a) 100 (one hundred) months from the date of execution of the Contract or (b) expiry of 90 (ninety) months of operating the AMI System after operational acceptance of the entire project ("Term of the Contract").
- 2.1.3. PFCCL, at its own discretion, may extend the operation and maintenance period of the AMI system at terms mutually agreed upon with the AMISP.
- 3. Obligation s of the Selected Bidder
- 3.1 In case an SPV has been formed, Selected Bidder shall ensure that it along with other members of the Consortium, if any, subscribe to 100% (one hundred percent) of the equity

share capital of the SPV and continue to hold such shares for a period up to two years after Installation Milestone. In the event Selected Bidder is a consortium then the shareholding pattern indicated in the Consortium Agreement, shall be maintained for a period up to two years after Installation Milestone:

- 3.2 In case a SPV has been formed, the Selected Bidder along with other members of the Consortium, if any, shall continue to hold not less than 51% (fifty-one percent) for the entire term of the AMISP Contract:
- 3.3 In the event, the Selected Bidder is a Consortium, the Lead Consortium Member shall hold at least 51% (fifty-one per cent) of the equity of the AMISP at all times until the expiry of two years from the Installation Milestone as per this Contract and 26% (twenty-six) for the remaining term of this Contract.
- 3.4 Subject to the conditions of the contract, any direct and/ or indirect change in shareholding of SPV, if formed, shall require prior approval of the Utility. Any change in shareholding shall be in compliance with applicable laws including but not limited to the guidelines issued vide Order No. F/No.6/18/2019-PPD by Ministry of Finance, Department of Expenditure, Public Procurement Division dated 23 July 2020 and rules for foreign direct investment in India.
- 4. Rights,
 Title and
 Interest to
 AMI
 System
 and
 Equipment
- **4.1** The ownership, rights and title to the AMI system and other equipment installed by AMISP for operation of the AMI system pursuant to this Contract shall vest with AMISP during the entire Term of Contract.
- **4.2**Unless extended by mutual consent of PFCCL and AMISP, after the Contract Period the

ownership, rights and title of the installed AMI system and other equipment (if any) installed by AMISP for operation of the AMI system pursuant to this Contract shall be transferred to the Utility without any cost.

5. Contract Price and Payment

(a) Contract Price

5.1 CONTRACT PRICE

- 5.1.1 The Contract Price is as indicated in SCC
- 5.1.2 In the event any approval required for imports and/ or use of imported equipment is denied in accordance with all applicable laws including those in relation to testing issued by Ministry of Power (Order No No.9/16/2016-Trans-Part(2) dated 18 November 2020; as amended and/ or modified from time to time), the same shall neither entitle revision of Contract Price nor shall result in revision of the Project Implementation Plan as specified in Article 2.2 of this Contract.

5.2 PAYMENT MECHANISM

(b) Payment Mechanism

- 5.2.1 The payment shall be made to the AMISP in Indian Rupees (INR) only.
- 5.2.2 The payment to the AMISP shall commence only one month after Operational Go-Live as defined in Section 6;
- 5.2.3 The payments due to AMISP from PFCCL shall be paid as per the payment structure specified in **SCC**.
- 5.2.4 Except in case of Change Order in accordance with Article 14 of this Contract, the sum total of all payments made to the AMISP shall not exceed the Contract Price quoted in Article 5.1.1
- 5.2.5 The actual payment shall be net of any applicable liquidated damages and/or penalty due

to noncompliance of SLAs by the AMISP.

- 5.2.6 AMISP will raise and deliver the invoice and the Deliverables mentioned above to PFCCL for the AMISP shall also raise payments. а supplementary invoice for the agreed amount towards software change requests/new requirements completed in the previous month, in accordance with Article 14.2 of this Contract. PFCCL will review the AMISP invoice and the Deliverables including the SLA performance report raised by the AMISP, in accordance with Article 25, within 5 (five) working days from the invoice and SLA performance report delivered by the AMISP. PFCCL may dispute the amount payable and shall pay the undisputed amount of the payment. The disputed amount, (related to actual number of meters installed, integrated and operationalized, penalty imposed due to noncompliance of SLAs, and liquidated damages), shall be dealt as per Article 13 of this Contract.
- 5.2.7 Deleted.
- 5.2.8 Deleted.
- 5.2.9 In the event the AMISP fails to meet a particular performance criterion as mentioned under the Service Level Agreement (SLA) specified in Clause 7.7 of Section 6 for cumulatively 3 (three) months in past 6 (six) months, resulting in the maximum penalty for the particular performance criterion, PFCCL may issue a SLA Default Notice to the AMISP directing it to take steps within 90 days to comply with the performance criterion specified in the SLA¹.
- 5.2.10 In the event of a Smart Meter supplied and installed by the AMISP is damaged for reasons not attributable to the AMISP such as theft, vandalism, burning, etc. or as a result as a result

¹ For example, in the event AMISP fails to meet the norm specified for "**Availability of AMI System per month**" for cumulatively 3 (three) months in past 6 (six) months leading to levy of maximum penalty thereof.

of Force Majeure Event, the AMISP shall not be liable for such damage. In such cases, upon receipt of Notice from PFCCL, the AMISP shall repair or replace the damaged Smart Meters. AMISP shall be required to replace the Smart Meter no later than 15 days of notification by PFCCL. Upon replacing the Smart Meter, AMISP shall be entitled to raise a supplementary invoice for the amount mutually agreed between AMISP and PFCCL. For the avoidance of doubt: (i) a damaged meter(s) shall be excluded from the total numbers installed and operational smart meters while conducting the SLA audit of the AMI system in accordance with Article 8; and (ii) in the event, AMISP replaces the Meter within 15 days of request by the Utility or Utility directs to continue operations without replacing the damaged Meter, the AMISP payment qua such meter(s) shall be paid as if such damaged meter complies with the SLA prescribed in this AMISP Contract.

5.2.11. Deleted.

5.3 TAXES AND DUTIES

- 5.3.1 For Goods whether supplied from or outside India, the AMISP shall be entirely responsible for all taxes, duties, stamp duties, license fees, and other such levies imposed outside India.
- 5.3.2 Any statutory increase or decrease in the taxes and duties including GST and Cess as applicable or in the event of introduction of new tax/cess or cessation of existing tax/cess subsequent to the AMISP's offer on the goods and services explicitly mentioned in financial bid shall be dealt with in accordance with provisions of Change in Law.
- 5.3.3 Notwithstanding anything above or elsewhere in the Contract, in the event that the input tax credit of the GST charged by the AMISP is denied by the tax authorities to PFCCL for reasons

(c) Taxes and Duties

attributable to the AMISP, PFCCL shall be entitled to recover such amount from the AMISP by way of adjustment from any of the subsequent invoices submitted by the AMISP to PFCCL.

6. **Performan** ce Security

- 6.1 The AMISP has furnished Performance Security in the form of an irrevocable bank guarantee valid up to a period of 6 (six) months beyond the end of the Contract Period or extended thereafter, for the amount indicated in SCC on the prescribed format. However, in case of delay in Installation Milestone, the validity of the initial Performance Security shall be extended by the period of such delay. In the event delay is solely due to acts and/ or omission of PFCCL cost of extending the validity of Performance Security shall be reimbursed to the AMISP by PFCCL.
- 6.2 Upon achievement of Installation Milestone, the value of the Performance Security shall be reduced by AMISP, to the extent indicated in SCC as determined in accordance with numbers of meters considered for Installation Milestone.
- **6.3** Any payments shall be made to the AMISP only after receipt of the initial Performance Security by PFCCL.
- **6.4** Upon Termination of the Contract due to PFCCL Event of default or expiry of the Contract Period, the separate Performance Security shall be discharged by PFCCL without any interest and returned to the AMISP not later than 14 (fourteen) working days following the date of Termination of the Contract.
 - Upon Termination of the Contract due to AMISP Event of default, the Performance Security shall be forfeited by PFCCL.
- 6.5 In case of any delay by the AMISP in

performing the activities of the scope of work with respect to the Project Implementation Schedule, then upon PFCCL's request, AMISP shall extend the validity of the separate Performance Security for the period for which the Contract is extended. In the event delay is solely due to acts and/ or omission of PFCCL cost of extending the validity of separate Performance Security shall be reimbursed to AMISP by PFCCL.

- 7. Liquidated Damages, Penalty and Incentive
- 7.1 Except in case of Force Majeure or where the delay in delivery of the Solution is caused due to any delay or default of PFCCL if the Installation Milestone is delayed by more than 10 (ten) months from the date of execution of the Contract the AMISP shall be liable to pay liquidated damages as per the rates specified in this Article.
- 7.2 Except in case of Force Majeure or where the delay in delivery of the Solution is caused due to any delay or default of PFCCL if the delivery, site installation, integration and operationalization of 100% of Feeder Meters each with related hardware, software and equipment is delayed by more than 9 (nine) months from the date of execution of the Contract the AMISP shall be liable to pay liquidated damages as per the rates specified in this Article.
- 7.3 PFCCL shall without prejudice to all its other remedies under the Contract, deduct from the amount due to be paid, as liquidated damages, a sum equivalent to 0.5% of the value of the Goods or Related Services of Contract Value for each week or part thereof of delay until actual delivery or performance, subject to a maximum of 10% of Contract Value cumulatively for entire sum of Liquidated

Damages.

7.4 Deleted;

7.5 Meter testing for acceptance at site shall be arranged by AMISP as per sampling plan mentioned in relevant IS Standards for Acceptance Tests. The cost towards such testing shall be borne by AMISP and shall be done at a NABL accredited Lab as decided by Utility or as per Joint Electricity Regulatory Commission (JERC) recommendation if any available. AMISP shall make arrangements for testing of meters prior to installation. The AMISP shall facilitate the Utility for compliance of JERC regulations/ directions and CEA **quidelines** operation. testina on and maintenance of meters supplied by AMISP. Provided further that post installation if the meter is found to be defective/ burnt due to reasons attributable to AMISP as well as for testing of meters based on consumer complaints, AMISP shall get the same tested in Utility Lab or any NABL accredited lab approved by Utility/ JERC. The testing charges, testing timeline, penalty for not adhering to testing timelines etc. would be as per JERC. AMISP shall pay the testing charges and penalty for defective meters and replacement of meters free of cost in case the meters are found to be defective after installation.

7.6 Deleted.

8. SLAs and SLA Audit

- 8.1 The AMISP shall be liable to penalties in the event of non-compliance of Service Level Agreements as specified in Section 6;
- 8.2 A designated team/ person from PFCCL/ Utility may review the system generated SLA performance report of AMISP each month. The review/ audit report will form basis of any action relating to imposing penalty on or breach of Contract of the AMISP.
- 8.3 In case, there is no review/ audit report submitted within 10 (ten) working days of every month, it shall be deemed that all SLAs were met in the previous month.
- 9. Force Majeure
- (a) Force Majeure Event
- 9.1 A Force Majeure means any event or circumstance or combination of events and circumstances including those stated below that wholly or partly prevents or unavoidably delays an Affected Party in the performance of its obligations under this AMISP Contract, but only if and to the extent that such events or circumstances are not within the reasonable control, directly or indirectly, of the Affected Party and could not have been avoided if the Affected Party had taken reasonable care or complied with prudent practices:

a) Natural Force Majeure Events:

act of God, including, but not limited to drought, fire and explosion (to the extent originating from a source external to the site), earthquake, epidemic, volcanic eruption, landslide, flood, cyclone, typhoon, tornado, or exceptionally adverse weather conditions,

b) Non-Natural Force Majeure Events:

i) Direct Non-Natural Force Majeure Events

- a) Nationalization or compulsory acquisition by any Governmental instrumentality of any material assets or rights of the AMISP; or
- b) the unlawful, unreasonable or discriminatory revocation of, or refusal to renew, any Consents, Clearances and Permits required by **AMISP** to perform obligations under the Contract or unreasonable any unlawful, discriminatory refusal to grant any other Consents, Clearances and permits required for the development/ operation of the Project, provided that a Competent Court of Law declares the revocation refusal to be unlawful, or unreasonable and discriminatory and strikes the same down; or
- c) any other unlawful, unreasonable or discriminatory action on the part of any Governmental instrumentality which is directed against the Project, provided that a competent Court of law declares the action to be unlawful, unreasonable and discriminatory and strikes the same down.
- d) any partial or complete shut-down of the internet services in the Project area
- e) Shortage of labor, materials or utilities where caused by circumstances that are themselves Force Majeure
- f) Restrictions imposed by central or state government that prevent or delay project execution

ii) Indirect Non - Natural Force Majeure

Events:

- a) an act of war (whether declared or undeclared), invasion, armed conflict or act of foreign enemy, blockade, embargo, riot, insurrection, terrorist or military action, civil commotion or politically motivated sabotage;
- b) radioactive contamination or ionizing radiation originating from a source in India or resulting from any other Indirect Non-Natural Force Majeure Event mentioned above, excluding circumstances where the source or cause of contamination or radiation is brought or has been brought into or near the Site by the Affected Party or those employed or engaged by the Affected Party; or
- c) industry wide strikes and labour disturbances, having a nationwide impact in India.

(b) Force Majeure Exclusions

9.2 FORCE MAJEURE EXCLUSIONS

- 9.2.1 Force Majeure shall not include (i) any event or circumstance which is within the reasonable control of the Parties and (ii) the following conditions, except to the extent that they are consequences of an event of Force Majeure:
 - Unavailability, late delivery, or changes in cost of the machinery, equipment, materials, spare parts etc. for the Project;
 - ii. Delay in the performance of any Contractors or their agents;
 - iii. Non-performance resulting from normal wear and tear typically experienced in transmission materials and equipment;

- iv. Strikes or labour disturbance at the facilities of the Affected Party;
- v. Insufficiency of finances or funds or the AMISP Contract becoming onerous to perform; and
- vi. Non-performance caused by, or connected with, the Affected Party's:

(c) Notification of Force Majeure Event

- a. negligent or intentional acts, errors or omissions;
- b. failure to comply with an Indian Law; or
- c. breach of, or default under this AMISP Contract or any Project documents.

9.3 NOTIFICATION OF FORCE MAJEURE EVENT

- 9.3.1 The Affected Party shall give notice to the other Party of any event of Force Majeure as soon as reasonably practicable, but not later than 7 (seven) days after the date on which such Party knew or should reasonably have known of the commencement of the event of Force Majeure. If an event of Force Majeure results in a breakdown of communications rendering it unreasonable to give notice within the applicable time limit specified herein, then the Party claiming Force Majeure shall give such notice as soon as reasonably practicable after reinstatement of communications, but not later than 1(one) day after such reinstatement. Provided that such notice shall be a precondition to the Affected Party's entitlement to claim relief under this AMISP Contract. Such notice shall include full particulars of the event of Force Majeure, its effects on the Party claiming relief and the remedial measures proposed. The Affected Party shall give the other Party regular reports on the progress of those remedial measures and such other information as the other Party may reasonably request about the Force Majeure.
- 9.3.2 The Affected Party shall give notice to the other Party of (i) the cessation of the relevant event

(d) Duty to Perform and

Duty to Mitigate

of Force Majeure; and (ii) the cessation of the effects of such event of Force Majeure on the performance of its rights or obligations under this AMISP Contract, as soon as practicable after becoming aware of each of these cessations.

9.4 DUTY TO PERFORM AND DUTY TO MITIGATE

(e) Available Relief for a Force Maieure Event

9.4.1 To the extent not prevented by a Force Majeure Event, the Affected Party shall continue to perform its obligations as provided in this AMISP Contract. The Affected Party shall use its reasonable efforts to mitigate the effect of any event of Force Majeure as soon as practicable.

9.5 AVAILABLE RELIEF FOR A FORCE MAJEURE EVENT

9.5.1 Subject to this Article 9

- a) no Party shall be in breach of its obligations pursuant to this AMISP Contract except to the extent that the performance of its obligations was prevented, hindered or delayed due to a Force Majeure Event;
- every Party shall be entitled to claim relief for a Force Majeure Event affecting its performance in relation to its obligations under this AMISP Contract;
- c) in the event on completion of 100 months from the date of execution of this AMISP Contract, the AMISP has not operated the AMI system for 90 months due to a Force Majeure Event(s) PFCCL shall extend the term of this AMISP Contract by such duration as may enable the operation of AMI system for 90 months.
- d) The AMISP shall be entitled to receive payment at rates to be mutually agreed between PFCCL and the AMISP for the smart meters replaced or repaired due to an event of force majeure

10.1

10. Intellectual Property

All Intellectual Property Rights in all material (including but not limited to all Source code, Object code. records. reports. designs. application configurations, data and written material, products, specifications. reports. drawings and other documents), which have been newly created and developed by the AMISP solely during the performance of Related Services and for the purposes of interalia use or sub-license of such services under this Contract, shall be the property of the AMISP. The AMISP undertakes to disclose all such material, which have been newly created and developed by AMISP solely during the performance of Related Services and for the purposes of inter-alia use or sub-license of such services under this Contract, to PFCCL. The AMISP hereby grants to PFCCL a perpetual, non-exclusive, non-transferable, irrevocable, royalty-free license to use all material disclosed PFCCL under the Contract. Nothina contained herein shall be construed as transferring ownership of any Intellectual Property Right from the AMISP to PFCCL.

10.2 The AMISP shall ensure that while it uses any software, hardware, processes, document or material in the course of performing the Services, it does not infringe the Intellectual Property Rights of any person and the AMISP shall keep PFCCL indemnified against all costs, expenses and liabilities howsoever, arising out any illegal or unauthorized use (piracy) or in connection with any claim or proceedings relating to any breach or violation of any permission/license terms or infringement of any Intellectual Property Rights by the AMISP or its personnel during the course of performance of Related Services. In case of infringement by the AMISP, the AMISP shall have sole control of the defence and all related

settlement negotiations

10.3 Subject to Article 10, AMISP shall retain exclusive ownership of all methods, concepts, algorithms, trade secrets, software documentation, other intellectual property or other information belonging to the AMISP that existed before the date of execution of the Contract.

11. Termination

11.1 AMISP EVENT OF DEFAULT

(a) AMISP Event of Default

- 11.1.1 AMISP Event of Default means any of the following events arising out of any acts or omission of AMISP, its representative, subcontracts, employees and which have not occurred solely as a result of any breach of this Contract by PFCCL or due to Force Majeure, and where AMISP has failed to remedy these events within a period of 90 (ninety) days of issuance of a notice by PFCCL requiring AMISP to remedy such event.
 - a) AMISP has failed to procure and arrange requisite finances for the implementation of the Project;
 - AMISP abandons the implementation of the Project or repudiates this Contract or otherwise takes any action, or evidences or conveys an intention not to be bound by the Contract;
 - c) AMISP, in the judgment of PFCCL has engaged in corrupt, fraudulent, collusive, or coercive practices, in competing for or in executing the Contract; or
 - d) AMISP is adjudged bankrupt or insolvent, or if a trustee or receiver is appointed for AMISP or for the whole or material part of its assets that has a material bearing on its ability to implement the Project:
 - e) AMISP has been, or is in the process of being

- liquidated, dissolved, wound-up, amalgamated or reconstituted in a manner that in the reasonable opinion of PFCCL would adversely affect AMISP's ability to implement the Project;
- f) A resolution for winding up of AMISP is passed, or any petition for winding up of AMISP is admitted by a court of competent jurisdiction and a provisional liquidator or receiver is appointed and such order has not been set aside within 90 (Ninety) days of the date thereof or AMISP is ordered to be wound up by a court of competent jurisdiction;
- g) In the event AMISP fails to cure the default as indicated in the SLA Default Notice within the time period specified therein;
- h) Failure of AMISP to furnish Performance Security in accordance with the provisions of this Contract;
- Failure or inordinate delay by AMISP to provide Solution as per Contract;
- j) Any representation or warranty made by the AMISP during the term of the Contract is found to be false and/or misleading;
- k) Failure on account of AMISP to abide by Applicable Laws and regulations;
- The shareholding of the AMISP ceases to be in accordance with the provisions of this Contract;
- m) No person having System Integration (SI) experience in terms of the RFP remains a shareholder of the AMISP;
- n) In the event equipment installed or proposed to be installed by the AMISP is found to have any embedded malware/ trojans/ cyber threat;
- o) AMISP fails to comply with the local content requirement as specified in the Bid Submission;
- p) AMISP fails to comply with any of its material obligations under this Contract.
- q) In the event the Solution supplied do not meet the minimum specifications as per the Contract, and the same is not replaced/ modified by the AMISP to meet the requirements within 14

(b) PFCCL Event of Default

(fourteen) working days of being informed by PFCCL, or as mutually decided between PFCCL and AMISP.

11.2 PFCCL EVENT OF DEFAULT

- 11.2.1 PFCCL Event of Default means any of the following events, unless such event has occurred as a consequence of the AMISP Event of Default or a Force Majeure event and where PFCCL has failed to remedy these events within a period of 90 (ninety) days of issuance of a notice by AMISP requiring PFCCL to remedy such event:
 - a) Deleted;
 - b) PFCCL is adjudged bankrupt or insolvent, or if a trustee or receiver is appointed for PFCCL or for the whole or material part of its assets that has a material bearing on its ability to perform its obligations under this Contract;
 - c) PFCCL has been, or is in the process of being liquidated, dissolved, wound-up, amalgamated or reconstituted in a manner that in the reasonable opinion of AMISP would adversely affect PFCCL's ability to perform its obligations under this Contract:
 - d) A resolution for winding up of PFCCL is passed, or any petition for winding up of PFCCL is admitted by a court of competent jurisdiction and a provisional liquidator or receiver is appointed and such order has not been set aside within 90 (Ninety) days of the date thereof or PFCCL is ordered to be wound up by a court of competent jurisdiction;
 - e) The breach by PFCCL of its obligations under this Contract which has an adverse effect on the performance of AMISP's obligations under this Contract.

(c) Termination for AMISP Event For Default

11.3 TERMINATION FOR AMISP EVENT FOR DEFAULT

- 11.3.1 Without prejudice to any other right or remedy which PFCCL may have in respect thereof under this Contract, upon the occurrence of AMISP Event of Default, PFCCL shall be entitled to terminate this Contract in the manner provided in Article 11.3.2.
- (d) Termination for PFCCL Event of Default
- 11.3.2 PFCCL shall issue a Preliminary Notice to AMISP providing 90 (Ninety) Days, or such extended period as PFCCL may allow, to cure the underlying Event of Default. If AMISP fails to cure the underlying Event of Default within such period allowed, PFCCL shall be entitled to terminate this Contract by issuing a termination notice to AMISP.

11.4 TERMINATION FOR PFCCL EVENT FOR DEFAULT

- 11.4.1 Without prejudice to any other right or remedy which AMISP may have in respect thereof under this Contract, upon the occurrence of a PFCCL Event of Default, AMISP shall be entitled to terminate this Contract in the manner provided in Article 11.4.2.
- (e) Consequences of Termination
- 11.4.2 AMISP shall issue a Preliminary Notice to PFCCL providing 90 (Ninety) Days, or such extended period as the AMISP may allow, to cure the underlying Event of Default. If PFCCL fails to cure the underlying Event of Default within such period allowed, AMISP shall be entitled to terminate this Contract by issuing a termination notice to PFCCL.

11.5 CONSEQUENCES OF TERMINATION

Upon Termination of the Contract, the AMISP shall:

11.5.1 Notwithstanding anything to the contrary contained in this Contract, any termination of this Contract pursuant to its term shall be

without prejudice to accrued rights of any Party, including its right to claim and recover damages and other rights and remedies which it may have in law or contract. All accrued rights and obligations of any of the Parties under this Contract, shall survive the termination of this Contract to the extent such survival is necessary for giving effect to such rights and obligations.

- 11.5.2 Following issue of the Termination Notice by PFCCL or AMISP, PFCCL take possession and control of AMISP's control room and call centre and the exclusivity granted to AMISP under Article 4 will come to an end.
- 11.5.3 Upon termination of this Contract by PFCCL or AMISP on account of AMISP's Event of Default (in accordance with Article 11.1), or termination of this Contract on account of PFCCL's event of default (in accordance with Article 11.2), AMISP shall be entitled to a termination payment subject to proper transfer of the installed AMI System, as agreed mutually upon, basis the following criteria:
 - a) In case termination of this Contract on account of AMISP's event of default: Termination payment to AMISP after Installation Milestone has been declared shall be the percentage, specified in **SCC**, of the termination payment Value as determined in terms of this Contract.
 - b) In case termination of this Contract on account of PFCCL's event of default: Termination payment to AMISP after Installation Milestone has been declared shall be the percentage, specified in SCC, of the termination payment Value as determined in terms of this Contract.
 - c) In case termination of this Contract prior to Installation Milestone the Termination payment shall be equal to:

- the percentage, specified in SCC, of the value of the assets proposed to be handed over to PFCCL as certified by an independent valuer in the event termination is on account of AMISP event of default—and
- ii. the percentage, specified in SCC, of the asset values shall be paid to the AMISP in the event termination is on account of PECCL event of default

For the avoidance of doubt, it is clarified that in the event lumpsum payment in terms of Article 5 has been made then such payment shall be reduced from the amount determined in accordance with this Article 11.5.3.(c)

- d) In case termination of the Contract is prior to the Installation Milestone- The Goods that are complete and ready for shipment within 28 (twenty-eight) days after the AMISP's receipt of the Notice of termination shall be taken into account while determining value of the assets proposed to be handed over to PECCL.
- e) In the event of termination is prior to Installation Milestone, PFCCL may request the AMISP to complete any part of the Solution. The cost of such works shall be agreed between the Parties. In the event Parties deem it appropriate the cost may be determined by the Independent Valuer.

Upon termination of this Contract by PFCCL or AMISP on account of AMISP's Event of Default (in accordance with Article 10.1), or termination of this Contract on account of PFCCL's event of default (in accordance with Article 10.2), AMISP shall be entitled to raise a supplementary invoice for an amount which is equal to the termination payment. The Supplementary invoice shall be paid separately by PFCCL within 30 (thirty) days from the date of such

invoice.

- 11.5.4 The Termination payment value would be calculated basis the following mechanism:
 - a) Deleted.
 - b) All amounts due, but not paid by PFCCL, including the aggregated amount due to be paid, but not paid or recovered from PFCCL, for the AMI system operations and maintenance as defined in the RFP by the AMISP, shall be calculated and factored in to arrive at the net outstanding receivables of the AMISP ("Outstanding Receivables");
 - c) All amounts due, but not paid by the AMISP, including the aggregated applicable liquidated damages and/(or) penalties due to non-compliance of SLAs by the AMISP, but not paid or recovered from the AMISP, for the AMI system operations and maintenance as defined in the RFP by the AMISP, shall be calculated and factored in to arrive at the net outstanding payables by the AMISP ("Outstanding Payables");
 - d) Termination Payment Value shall be equal to the Outstanding Receivables as per Article 11.5.4.(a) and (b); reduced by Outstanding Payables as per Article 11.5.4.(c) and the sum of insurance proceeds received by the AMISP for the AMI system, (if any).
- 11.5.5 Upon Termination of the Contract or expiry of the contract period, the AMISP shall prepare and present a detailed Exit Management Plan within 5 (five) working days of termination notice receipt to the PFCCL ("Exit Management Plan") in accordance with Article 11.6 to this Contract.
- 11.5.6 PFCCL or its nominated agency will review the Exit Management plan. If approved, AMISP shall start working on the same immediately. If

(f) Exit Management

the plan is rejected, AMISP shall prepare alternate plan within 2(two) working days. If the second plan is also rejected, PFCCL will provide a plan for AMISP and it should be adhered by in totality.

- 11.5.7 The Exit Management Plan should cover at least the following:
 - a) Execute all documents that may be necessary to effectively transfer the ownership and title, including OEM warranties in respect of all equipment;
 - b) Handover all developed codes, related documentation and other Configurable Items, if any in his possession;
 - c) Handover the list of all IT Assets, passwords at all locations to PFCCL.
- 10.5.8 The AMISP and the Authorized personnel from PFCCL will sign a completion certificate at the end of successful completion (all points tracked to closure) of the Exit Management Plan.

11.6 Exit Management

11.6.1 Exit Management

In case the Contract with PFCCL ends or is terminated before the expiry date of Contracts, the Parties shall agree at that time whether, and if so during what period, the provisions of this Exit Management Plan shall apply. The Parties shall ensure that their respective associated entities carry out their respective obligations set out in this Exit Management Plan. The exit management shall be done in such a manner that operations should continue without any restriction on access/usage of any kind of functionality. At the end of the Contract period, AMISP shall provide necessary handholding and transition support to PFCCL or its agency for maintaining the system post the Contract

with the AMISP. This includes (but not limited to):

- a) Conducting detailed walkthrough and demonstrations for the AMI Solution;
- b) Handing over of AMI Solution, PFCCL's data and all other relevant documentation including updated detailed bill of quantities for materials and services provided under the Contract:
- c) Addressing the queries/clarifications of the designated staff / new agency with respect to the working/ performance levels of the infrastructure;
- d) Conducting training sessions;
- e) Knowledge Transfer;
- f) Any other activity, over and above these, as may be deemed necessary to meet the service levels and requirements specified in the RFP.

11.6.2 Transfer of Assets / AMI Solutions

- a) PFCCL shall be entitled to serve notice in writing on the AMISP at any time during the Exit Management Period requiring the AMISP and/or its sub-contractor to provide PFCCL with a complete and up to date list of the Assets within 30 (thirty) days of such notice. PFCCL shall also be entitled to serve notice in writing on the AMISP at any time prior to the end of the Exit Management Period requiring the AMISP to transfer to PFCCL or its nominated agencies in accordance with Article 11.
- b) In case of contract being terminated by PFCCL, PFCCL reserves the right to ask AMISP to continue running the project operations for a period of 3 months after termination orders are issued. In case of contract being terminated by AMISP,

PFCCL reserves the right to ask the AMISP to continue running the project operations for a period of 6 (six) months after termination notice is served by AMISP. In such case, payments during the Exit Management Period shall be made in accordance with the Article 5.2 and 10.5 (as the case may be).

- c) Upon service of a notice under this Plan, the following provisions shall apply:
 - All title to the assets as per the updated detailed bill of quantities for materials and services provided under the Contract shall be transferred to PFCCL, on or before the last day of the Exit Management Period.
 - ii. Payment to the outgoing AMISP shall be made to the tune of last set of completed Services/ deliverables, subject to SLA requirements.

11.6.3 Cooperation and provision of information

During the Exit Management Period:

- a) AMISP will facilitate/ allow PFCCL or its nominated agency access to information reasonably required to define the then current mode of operation associated with the provision of the services to enable PFCCL to assess the existing services being delivered;
- b) Promptly on reasonable request by PFCCL, the AMISP shall provide access to and copies of all information held or controlled by them which they have prepared or maintained in accordance with this Contract relating to any material aspect of the services (whether provided by the AMISP or sub-contractors appointed by the AMISP) to PFCCL or its nominated agency. Such information shall include details pertaining to the list of assets as per updated detailed bill

of quantities for materials and services provided under the Contract, services rendered and other performance data. AMISP shall permit PFCCL or its nominated agencies to have reasonable access to its employees and facilities to understand the methods of delivery of the services employed by the AMISP and to assist appropriate knowledge transfer; and

c) In the event of Termination prior to Installation Milestone, AMISP and PFCCL shall jointly appoint an Independent Valuer to certify the value of assets, as per the updated detailed bill of quantities for materials and services provided under the Contract, proposed to be handed over to PFCCL upon termination. The cost of Independent Valuer shall be paid by the AMISP.

11.6.4 Confidential information, security and data

AMISP shall promptly on the commencement of the Exit Management Period supply to PFCCL or its nominated agency the following:

- a. information relating to the list of assets as per the updated detailed bill of quantities for materials and services provided under the Contract, current Services rendered and consumer and performance data relating to the performance of sub-contractors in relation to the Services:
- b. documentation relating to the Project's Intellectual Property Rights;
- c. documentation relating to sub-contractors;
- d. all current and updated data as is reasonably required for purposes of PFCCL or its nominated agencies transitioning the services in a readily available format;
- e. all other information (including but not limited to documents, records and agreements) relating to the services

reasonably necessary to enable PFCCL or its nominated agencies, to carry out due diligence in order to transition the provision of the Services to PFCCL or its nominated agencies, (as the case may be).

11.6.5 Transfer of certain agreements

On request by PFCCL or its nominated agency, the AMISP shall affect such assignments, licenses and sub-licenses as PFCCL may require in favour of PFCCL or its nominated agency reasonably necessary for the carrying out of replacement services. These agreements may include equipment lease, maintenance or service provision agreement between selected AMISP and third-party lessors, service providers, and any other agreements related to the Services.

11.6.6 General obligations of the AMISP during exit management period

- **AMISP** a. The shall provide all such information reasonably as may be necessary to effect as seamless a handover as practicable in the circumstances to PFCCL or its nominated agency and which the AMISP has in its possession or control at any time during the Exit Management Period.
- b. For the purposes of this Schedule, anything in the possession or control of the AMISP or associated entity, or sub-contractors is deemed to be in the possession or control of the AMISP.
- c. The AMISP shall commit adequate resources to comply with its obligations under this Exit Management Schedule.

11.6.7 Exit management process

The AMISP shall prepare an Exit Management Plan for transfer of operations to PFCCL or its nominated agency, in the event of termination or expiry of the contract with PFCCL, without

- affecting services to stakeholders adversely. AMISP shall get this process approved by PFCCL. The Plan shall include, but not be limited to, the following-
- a. A detailed program of the transfer process including details of the means to be used to ensure continuing provision of the Services throughout the transfer process or until the cessation of the Services and of the management structure to be used during the transfer;
- b. Plans for the communication with such of the AMISP's subcontractors, staff, suppliers, customers and any related third party as are necessary to avoid any material detrimental impact on the PFCCL's project operations and AMI Services to other stakeholders as a result of undertaking the transfer;
- Plans for provision of contingent support to PFCCL or its nominated Agency for a reasonable period after transfer.
- d. The Exit Management Plan including all updates shall be presented by the AMISP to and approved by PFCCL or its nominated agencies.
- e. During the Exit Management Period, the AMISP shall use its best efforts to deliver the services.
- f. Payments during the Exit Management Period shall be made in accordance with the Articles 5.2 and 10.5 (as the case may be)
- g. The Exit Management plan shall be furnished in writing to PFCCL or its nominated agencies within 90(ninety) days from date of execution this AMISP contract
- h. The AMISP shall re-draft the Exit Management Plan annually thereafter to ensure that it is kept relevant and up to date. The updated plan shall be furnished in writing to PFCCL or its nominated agencies within 15 days from the end of such period.

12 Liability/ Indemnity

- 12.1 The AMISP hereby agrees to indemnify PFCCL, for all conditions and situations mentioned in this Article, in a form and manner acceptable to PFCCL. The AMISP agrees to indemnify PFCCL and its officers, servants, agents ("PFCCL Indemnified Persons") from and against any costs, loss, damages, expense, claims including those from third parties or liabilities of any kind howsoever suffered, arising or incurred inter alia during and after the Contract Period out of:
 - a) any negligence or wrongful act or omission by the AMISP or its agents or employees or any third Party associated with AMISP in connection with or incidental to this Contract: or
 - b) any infringement of patent, trademark/copyright or industrial design rights arising from the use of the supplied Solution or any part thereof.
- 12.2 The AMISP shall also indemnify PFCCL against any privilege, claim or assertion made by third party with respect to right or interest in, ownership, mortgage or disposal of any asset, property, movable or immovable as mentioned in any Intellectual Property Rights, licenses and permits.
- 12.3 Without limiting the generality of the provisions of the Article 12.1 and 12.2, the AMISP shall fully indemnify, hold harmless and defend PFCCL Indemnified Persons from and against any and all suits, proceedings, actions, claims, demands, liabilities and damages which PFCCL Indemnified Persons may hereafter suffer, or pay by reason of any demands, claims, suits or proceedings arising out of claims of infringement of any domestic or foreign patent rights, copyrights or other intellectual property, proprietary or confidentiality rights with respect

(a) Survival on Termination

(b) Defence of Claim

supplied or used by the AMISP in performing the AMISP's obligations or in any way incorporated in or related to the Project. If in any such suit, action, claim or proceedings, a temporary restraint order or preliminary injunction is **AMISP** granted, the shall make every reasonable effort, by giving a satisfactory bond or otherwise, to secure the suspension of the injunction or restraint order. If, in any such suit, action, claim or proceedings, the Solution or any part thereof or comprised therein, is held to constitute an infringement and its use is permanently enjoined, the AMISP shall promptly make every reasonable effort to secure for the Utility a license, at no cost to Utility, authorizing continued use of the infringing work. If the AMISP is unable to secure such license within a reasonable time, the AMISP shall, at its own expense, and without impairing the specifications and standards, either replace the affected work, or part, or process thereof.

to the Solution, information, design or process

12.4 SURVIVAL ON TERMINATION

12.4.1 The provisions of this Article 11 shall survive the Termination of the Contract

12.5 DEFENCE OF CLAIMS

- 12.5.1 If any proceedings are brought or any claim is made against PFCCL arising out of the matters referred to in Article 11, PFCCL shall promptly give the AMISP a notice thereof, and the AMISP may at its own expense and in PFCCL's name conduct such proceedings or claim and any negotiations for the settlement of any such proceedings or claims.
- 12.5.2 If the AMISP fails to notify PFCCL within 28 (twenty-eight) days after receipt of such notice that it intends to conduct any such proceedings or claim, then PFCCL shall be free to conduct

the same on its own behalf.

(c) Limitation of Liability

12.5.3 PFCCL shall, at the AMISP's request, afford all available assistance to the AMISP in conducting such proceedings or claim, and shall be reimbursed by the AMISP for all reasonable expenses incurred in so doing.

12.6 LIMITATION OF LIABILITY

- 12.6.1 Except in cases of gross negligence or wilful misconduct:
 - a) Neither Party shall be liable to the other Party for any indirect or consequential loss or damage, loss of use, loss of production, or loss of profits or interest costs, provided that this exclusion shall not apply to any obligation of the AMISP to pay liquidated damages to PFCCL; and
 - b) The aggregate liability of the AMISP to PFCCL, whether under the Contract, in tort, or otherwise, shall not exceed the Contract Price. Provided that this limitation shall not apply to the cost of repairing or replacing defective equipment, or to any obligation of the AMISP to indemnify PFCCL with respect to infringement of any Intellectual Property Rights.

13 Governing Laws and Settlement of Disputes

- 13.1 PFCCL and the AMISP shall make every effort to resolve amicably any disagreement or dispute arising between them under or in connection with the Contract, by direct informal negotiation.
- 13.2 If PFCCL and the AMISP fail to resolve such a dispute (the date of commencement of the dispute shall be taken from the date when this Article reference is quoted by either Party in a formal communication clearly mentioning existence of dispute or as mutually agreed) or difference by mutual consultation within 28 (twenty-eight) days from the commencement of such consultation, either Party may require that

- the dispute be referred for resolution to the formal mechanisms specified in this Article.13.
- 13.3 All disputes or differences in respect of which the decision, if any, has not become final or binding as aforesaid shall be settled by arbitration in the manner hereinafter provided. The arbitration shall be conducted by three arbitrators, one arbitrator each to be nominated by the AMISP and PFCCL and the third to be appointed as the presiding arbitrator by both the arbitrators in accordance with the Arbitration and Conciliation Act, 1996. If either of the parties fails to appoint its nominee arbitrator within 60 (sixty) days after receipt of a notice from the other party invoking the arbitration, the nominee arbitrator appointed by one of the party invoking the arbitration clause shall act as the sole arbitrator to conduct the arbitration under the Arbitration and Conciliation Act 1996, as amended from time to time.
- 13.4 The arbitration shall be conducted in accordance with the provisions of the Arbitration and Conciliation Act, 1996 or any statutory modification thereof. The seat of arbitration shall be as specified in **SCC**.
- 13.5 The Contract shall be governed by and interpreted in accordance with laws of the India. The Courts, specified in SCC, shall have exclusive jurisdiction in all matters arising under this Contract.
- 13.6 Parties to Perform Obligations: Notwithstanding the existence of any Dispute and difference referred to the Arbitration Tribunal as provided in Article 13.3 and save as the Arbitration Tribunal may otherwise direct by a final or interim order, the Parties hereto shall continue to perform their respective obligations (which are not in dispute)

under this Contract.

14 Change Order

(a) Change Notes / Change Order to Alter Number of Meters to be Installed

14.1 Change Notes / Change Order to Alter Number of Meters to be Installed

Necessity of Change Notes arise due to more meters getting added over and above the numbers agreed for the project, subject to the variance limit of specified in **SCC**, as percentage of the number of meters decided. Negative variation is permissible only up to the "Installation Milestone". Positive variation is however possible at any time during the Contract Period. The variation allowed cannot be more than the minimum and maximum numbers, as specified in SCC.

14.1.1 Change Notes shall be generated and maintained by the AMISP based on a backup written communication from the PFCCL's Project Manager. The AMISP shall continue to receive its payments for additional meters installed and made operational through the means of Change Notes.

14 1 2 Deleted

- 14.1.3 In the event a Smart Meter is shifted from one node to another, AMISP shall be entitled to receive its payments for such meters as if such smart meter has not been shifted. In other words, this will not increase the total number of meters installed by the AMISP.
- 14.1.4 In the event a Change Note / Change Order

causes an increase or decrease in the time required for, the AMISP's performance of any provisions under the Contract, an equitable adjustment shall be made in the Project Implementation Schedule as provided in Clause 12 of Section 6 and the Contract shall accordingly be amended. Any claims by the AMISP or PFCCL for adjustment under this Article must be asserted within 28 (twenty-eight) days from the date of the AMISP's receipt of the Change Note / Change Order. The Parties agree that any change in the delivery and Project Implementation Schedule shall result in a proportional change in the Term of the Contract

- 14.1.5 An institutional mechanism will be set up for taking decisions regarding requests for changes or New Requirements. The Utility will set up a Change Control Committee with members from the Utility, PFCCL and the AMISP. If it is unable to reach an agreement, the decision of PFCCL/Utility will be final.
- 14.1.6 In the case of additional meters installed through Change Notes maintained by the AMISP, PFCCL shall convert all such Change Notes to Change Orders any time before the contract period is completed

(b) Change Request/ Change Order for New/Enhancements to Software Applications

14.2 Change Request/ Change Order for New/ Enhancements to Software Applications

Another form of change may arise when the discovers Utility the need to have delivered enhancements in the software applications and/or entirely new functional applications requirements in the Requirements"), subject to Article 14.2.5 of this Contract.

14.2.1 At any point in time the Utility/ PFCCL may raise a Change Request to include New

Requirements in the AMI system application. This Change Request shall include the following:

- Identification and documentation of the need for the change
- Functional details of the change
- Information related to initiator, initiation date and
- Priority of the change
- 14.2.2 The AMISP will analyse and evaluate the Change Request to come up with the estimate of the effort involved in terms of man-months required (in respective skill areas) and time schedule as per agreed priority and document the same. Utility/ PFCCL will use the estimated effort of the new requirements made by the AMISP and together with the quoted manmonth rates arrive at a cost estimate. For all technical resources, the quoted man-month rate shall be used. Efforts of support staff shall not be taken into consideration for this purpose.
- 14.2.3 Based on the agreed cost estimate, PFCCL shall raise a "Change Order". The AMISP shall undertake the development of the New Requirements only after securing express consent of PFCCL. If the consent of PFCCL is not received, then the change will not be carried out. The change will be implemented in accordance to the agreed cost, effort, and schedule by the AMISP and the change will be verified by the PFCCL on completion of implementation.
- 14.2.4 If the Change Order for New Requirements agreed to herein causes an increase or decrease in cost of, or the time required for, firm's performance of any provisions under the Agreement, equitable adjustments shall be made in the Agreement Price or Delivery Schedule, or both, and the Agreement shall accordingly be amended. Any claims by firm for

- adjustment under this must be asserted within 30 (thirty) days from the date of AMISP receiving the change order.
- (c) Process for executing a Change Request, Change Order
- 14.2.5 The following categories of Change Requests shall not be treated as "New Requirements" and the AMISP is expected to deliver these Change Requests as per agreed schedule without any commercial implications.
 - All bug fixes
 - All upgrades of the licensed platforms
 - Changes made to report templates
 - New reports not exceeding 5 numbers
 - Integration with national level systems like NFMS etc.
 - Minor changes not requiring more than 10 man-days
 - Aspects already covered under existing scope of work provided in this Contract
- 14.2.6 In the case of New Requirements in Software Applications, PFCCL/ Utility may at any time, by a written Change Request seek changes to be implemented within the general scope of the Agreement provided this does not constitute unrelated work and that it is technically practicable, taking into account both the state of advancement of the Solution and the technical compatibility of the change envisaged with the nature of the Solution as specified in the Contract.
- 14.2.7 The Change Request/ New Requirement management procedure will follow the following steps: -
 - i. Identification and documentation of the need for the Change Request/New Requirement - The information related to initiator, initiation date and details of Change Request/New Requirement and

- priority of the change/New Requirement will be documented by PFCCL/ Utility.
- ii. Analysis and evaluation of the Change Request/New Requirement - Impact of the change/ new requirement in terms of the estimated effort, changed schedule, cost and the items impacted will be analyzed and documented by the AMISP.
- iii. Approval or disapproval of the Change Request/ New Requirement PFCCL/ Utility will approve or disapprove the Change Request/ New Requirements. Once approved the Change Request is converted into a Change Order which is subject to the conditions laid down in Article 14.2.5.
- iv. Implementation of the change/ New Requirement – The Change Order/New Requirement will be implemented in accordance with the agreed cost, effort, and schedule by the AMISP.
- v. Verification of the change/New Requirement The Change Order/New Requirement will be verified by PFCCL/ Utility on implementation of the change request.

15. Miscellaneous

(a) Waiver

15.1 WAIVER

15.1.1 Subject to Article 15.1.2, no relaxation, forbearance, delay, or indulgence by either Party in enforcing any of the terms and conditions of the Contract or the granting of time by either Party to the other shall prejudice, affect, or restrict the rights of that Party under the Contract. Neither shall any waiver by either Party of any breach of Contract operate as

waiver of any subsequent or continuing breach of Contract.

- 15.1.2 The waiver by either Party of a breach or default of any of the provisions of this Contract by the other Party shall not be interpreted as:
 - a) A waiver of any succeeding breach of the same or other provision, nor shall any delay or omission on the part of the other Party to exercise; or
 - b) A way to avail itself of any right, power, or privilege that it has or may have under this contract to operate as waiver of any breach or default by the other Party.
 - c) Any waiver of a Party's rights, powers, or remedies under the Contract must be in writing, dated, and signed by an authorized representative of the Party granting such waiver, and must specify the right and the extent to which it is being waived.

(b) Extension of Time

15.2 EXTENSIONS OF TIME

- 15.2.1 If at any time during performance of the Contract, the AMISP or its subcontractors should encounter conditions impeding timely delivery of the Goods or completion of Related Services pursuant to this Contract, the AMISP shall promptly notify PFCCL in writing of the delay, its likely duration, and its cause. As soon as practicable after receipt of the AMISP's notice, the Utility shall evaluate the situation and may at its discretion extend the AMISP's time for performance, in which case the extension shall be ratified by the Parties by amendment of the Contract.
- 15.2.2 Except in case of Force Majeure, as provided in Article 9 or where the delay in delivery of the Goods or completion of Related Services is caused due to any delay or default of PFCCL, any extension granted under Article 15.2.1 shall

not absolve the AMISP from its liability to the pay of liquidated damages pursuant to Article 7. Time will be the essence of the Contract and no variation shall be permitted in the delivery time/delivery schedule mentioned in the order unless agreed by PFCCL. The AMISP is expected to implement the systems for the project area as per the schedule indicated in the Contract.

(c) Insurance

15.3 **INSURANCE**

- 15.3.1 The Goods supplied under the Contract shall be fully insured by the AMISP against loss or damage incidental to manufacture or acquisition, transportation, storage, delivery, and operations, in the manner specified in the Contract.
- 15.3.2 The AMISP shall furnish to PFCCL copies of certificates and policies of the Insurances as soon as they are effected and renewed by or on behalf Of the AMISP from time to time in terms of Article 15.

(a) Transportation

15.4 TRANSPORTATION

- 15.4.1 The AMISP shall at its own risk and expense transport all the AMISP's equipment to the site by the mode of transport that the AMISP judges most suitable under all the circumstances.
- 15.4.2 Unless otherwise provided in the Contract, the AMISP shall be entitled to select any safe mode of transport operated by any person to carry the AMISP's equipment.
- 15.4.3 The AMISP shall be responsible for obtaining, if necessary, approvals from the authorities for transportation of the AMISP's equipment to the Project site. PFCCL shall use its best endeavours in a timely and expeditious manner to assist the AMISP in obtaining such

approvals, if requested by the AMISP.

16. Confidential Information

- 16.1 Both AMISP and PFCCL undertake to each other to keep confidential all information (written as well as oral) concerning the business and affairs of the other, which has been obtained or received as a result of the discussions leading up to or the entering of the Contract.
- 16.2 After the entering of the Contract, PFCCL and the AMISP shall keep confidential and shall not, without the written consent of the other Party hereto, divulge to any third party documents, data, or other information furnished directly or indirectly by the other Party hereto in connection with the Contract, whether such information has been furnished prior to, during or following completion or termination of the Contract. Notwithstanding the above, the AMISP may furnish to its subcontractors such documents, data, and other information it receives from the Utility to the extent required for the subcontractors to perform its work under the Contract, in which event the AMISP shall obtain from such subcontractors an undertaking of confidentiality similar to that imposed on the AMISP under this Article 16.
- 16.3 PFCCL shall not use such documents, data, and other information received from the AMISP for any purposes unrelated to the Contract. Similarly, the AMISP shall not use such documents, data, and other information received from PFCCL for any purpose other than the design, procurement, or other work and services required for the performance of the Contract.
- 16.3.1 The obligation of a Party under Articles 16.1 and 16.2 above, however, shall not apply to information that:

- a) PFCCL or AMISP need to share with the institutions participating in the financing of the Contract;
- b) now or hereafter enters the public domain through no fault of that Party;
- c) can be proven to have been possessed by that Party at the time of disclosure and which was not previously obtained, directly or indirectly, from the other Party; or
- d) Otherwise lawfully becomes available to that Party from a third Party that has no obligation of confidentiality.
- 16.3.2 The above provisions of this Article 16 shall not in any way modify any undertaking of confidentiality given by either of the Parties hereto prior to the date of execution of the Contract in respect of the Supply or any part thereof.
- 16.3.3 Each of the Parties to this Contract, undertakes to the other to take all such steps as shall from time to time be necessary to ensure compliance with the provisions of the above Articles by its employees, agents and sub-contractors.
- 16.3.4 The provisions of this Article 16 survive completion or termination, for whatever reason, of the Contract.

17. Subcontracting

- 17.1 The AMISP shall be permitted to appoint subcontractor(s) so as to meet its obligations under the Contract with PFCCL, with intimation to PFCCL, provided they ensure that any person engaged by AMISP are not blacklisted by any Government organization or regulatory agencies or Government Undertaking as on the date of intimation to PFCCL (as defined under the Section 2 of this RFP).
- 17.2 AMISP shall engage only such sub-contractor(s) who satisfy the eligibility requirement in terms of applicable laws including the guidelines

issued vide Order No. F/No.6/18/2019-PPD by Ministry of Finance, Department of Expenditure, Public Procurement Division dated 23 July 2020 and as amended from time to time.

18. Warranty

- 18.1 The AMISP warrants that all the Goods that would be used as part of Solution would be new, unused, and of the most recent or current models, and that they incorporate all recent improvements in design and materials, unless provided otherwise in the Contract.
- 18.2 The AMISP further warrants that the Goods shall be free from defects arising from any act or omission of the AMISP or arising from design, materials, and workmanship, under normal use in the conditions prevailing in the country of final destination.
- **18.3** The warranty of the AMI system shall remain valid till expiry of the Contract Period.
- 18.4 The AMISP shall be responsible for comprehensive maintenance of all the equipment and systems supplied & installed under this Contract during the Operational Period. There may be some variation during detailed engineering. AMISP will have to make their own assessment of the systems and deploy manpower accordingly. However, it is to be ensured that specified manpower of requisite qualification is deployed.
- 18.5 The maintenance of the system supplied & installed by the AMISP shall be comprehensive. The AMISP shall be responsible for providing all the spares as may be required. The spares shall be maintained by the AMISP at no extra cost to PFCCL.
- 18.6 At the end of the contract or at the time of

transfer in case of termination under article 11, the meters shall have a warranty of five years from their installation

19. Change in Laws and Regulations

- 19.1 Unless otherwise specified in the Contract, if after the Bid Submission Deadline indicated in SCC, any law, regulation, ordinance, order or bylaw having the force of law is enacted, promulgated, abrogated, or changed in India where the sites is located (which shall be deemed to include any change in interpretation or application by the competent authorities) that subsequently affects the project delivery, then delivery shall be correspondingly amended, to the extent that the AMISP has thereby been affected in the performance of any of its obligations under the Contract.
- 19.2 The Party affected by a change in law shall give notice giving details of the likely impact of the change in law. The Parties shall negotiate in good faith to place the affected party at the same economic position as if no change in law had occurred. Provided only such change in law events which have financial impact beyond a threshold specified in **SCC**, are to be considered for the purposes of grant of relief to the affected Party.
- 19.2 Notification of Change In Law: If the AMISP is affected by a Change in Law in accordance with Article 19.1 and wishes to claim relief for such Change in Law under this Article 19, it shall give notice to PFCCL of such Change in Law as soon as reasonably practicable after becoming aware of the same. Any notice served pursuant to Articles 18 shall provide, amongst other things, precise details of the Change in Law and its effect on the AMISP.

20. Severability

20.1 If any provision or condition of the Contract is prohibited or rendered invalid or unenforceable,

such prohibition, invalidity or unenforceability shall not affect the validity or enforceability of any other provisions and conditions of the Contract or the Contract as a whole and the remaining provisions of the Contract shall remain in full force and effect.

21. Language

- 21.1 The official language of the Contract is English. Contract as well as all correspondence and documents relating to the Contract exchanged by the AMISP and PFCCL, shall be written in English. Supporting documents and printed literature that are part of the Contract may be in another language provided they are accompanied by an accurate translation of the relevant passages in English, in which case, for purposes of interpretation of the Contract, the English translation shall govern.
- 21.2 The AMISP shall bear all costs of translation to English and all risks of the accuracy of such translation. The AMISP shall be bound to the English translation and what has been stated therein.

22. Assignment

- 22.1 The AMISP shall not assign, in whole or in part, their obligations under this Contract without prior permission of PFCCL.
- 22.2 The permission for assignment of whole or part of this contract shall only be requested/permitted at least two years after Installation Milestone.

22.3 Deleted

23. Entire Agreement

- 23.1 This Contract along with all its annexures, schedule and the provisions of the RFP reflect the entire understanding of the Parties.
- 23.2 No variation or modification of the terms of the

Contract shall be made except by written amendment signed by the Parties.

24. Disclaimer

- 24.1 PFCCL reserves the right to share, with any consultant of its choosing, any resultant proposals in order to secure expert opinion.
- 24.2 PFCCL reserves the right to accept any proposal deemed to be in the best interest of PFCCL.

25. Public Disclosure

- 25.1 All materials provided to PFCCL/ Utility by the AMISP may be disclosed in accordance with the provisions of applicable law including but not limited to the Right To Information Act, 2005 (RTI), etc.
- 25.2 The AMISP's team shall not make or permit to be made a public announcement or media release about any aspect of this Contract unless PFCCL first gives the AMISP its written consent.
- 26. Adherence to
 Safety
 Procedures,
 Rules,
 Regulations and
 Restriction
- 26.1 AMISP shall comply with the provision of all laws including labour laws, rules, regulations and notifications issued there under from time to time. All safety and labour laws enforced by statutory agencies and by PFCCL shall be applicable in the performance of this Contract and AMISP's team shall abide by these laws.
- 26.2 Access to the PFCCL's/ Utility's locations shall be strictly restricted. No access to any person except the designated personnel belonging to the AMISP who are genuinely required for execution of work or for carrying out management/maintenance who have been explicitly authorized by PFCCL/ Utility shall be allowed entry to the PFCCL's / Utility's locations. Even if allowed, access shall be restricted to the pertaining equipment of Utility only. The AMISP shall maintain a log of all such

activities.

- 26.3 The AMISP shall take all measures necessary or proper to protect the personnel, work and facilities and shall observe all reasonable safety rules and instructions. AMISP's team shall adhere to all security requirement/regulations of Utility during the execution of the work. PFCCL's / Utility's employees and associates also shall comply with safety procedures/policy.
- 26.4 The AMISP shall report as soon as possible any evidence, which may indicate or is likely to lead to an abnormal or dangerous situation and shall take all necessary emergency control steps to avoid such abnormal situations.
- 26.5 PFCCL/ Utility will be indemnified for all the situations mentioned in this Article in the similar way as defined in Article 12.

27. Survival

27.1 The Articles of this contract, which by nature are intended to survive termination of this Contract, shall remain in effect after such termination

28. Notices

- 28.1 All notices to be given under this Contract shall be in writing and in the English language.
- 28.2 A Notice shall be effective when delivered or on the notice effective date, whichever is later.
- **28.3** All notices must be delivered personally, by registered or certified mail or by facsimile transmission or email.

28.4 All notices shall be effective:

 a) If sent by facsimile transmission or email, when sent (on receipt of confirmation of the correct number or address);

- b) If sent by registered post or certified mail, within 5 (five) days of dispatch;
- c) If delivered personally, on receipt by intended recipient, provided that all notices given by facsimile transmission shall be confirmed by registered or certified mail.
- 28.5 Each party shall forthwith notify the other party of any change in its address to which notices under this Contract are to be delivered, mailed or facsimiled.

III. Special Conditions of Contract

GCC Article/ Clause	Amendments of, and Supplements to, Clauses in the General Conditions of Contract					
1.1 (j)	Formation of SPV is mandatory in the event the Selected Bidder is a Consortium. In the event the Selected Bidder is a Sole Bidder as an individual entity, or is a Bidding Consortium comprising of at least one Central Public Sector Enterprise (CPSE) / Public Sector Undertaking (PSU) or a Subsidiary/ Joint Venture of a CPSE/ PSU, such Bidder at its discretion and with permission of PFCCL, incorporate a separate company as a SPV under the Companies Act, 2013 with 100% equity ownership to execute the Project					
1.2.12	Deleted					
5.1.1	Contract Value is INR [X] (i.e. Sum of Quoted Total CAPEX in Table 1 of the Financial Proposal and Quoted Total FMS Cost in Table 2 of Financial Proposal)					
5.2.3	The payment shall be made to the AMISP (AMISP Payment) in Indian Rupees (INR) only as per the following:					
	 a. An amount equivalent to 22.5% of the Contract Value limited to Rs. 1350 per meter would be paid to AMISP out of Govt. of India Grant provided to the Utility in line with the Operation Guidelines of the "Revamped Distribution Sector Scheme – A Reforms-based and Result-linked Scheme" as per the following: 					
	 i. Payment of 15% of the Contract Value limited to Rs. 900 per meter – The payment shall be made to AMISP in a phased manner after: 					
	 a) Delivery, site installation, integration and operationalization of every 5% lot of the total number of smart meters each with related hardware, software and equipment 					
	b) Submission of the Service Level Agreement (SLA) performance report at the end of 1 (one) month of Operations post Operational Go-Live of above lots of meters and demonstration of one successful bill recharge in case of consumer meters and successful communication with server in case of DT & Feeder meters for such lots of meters.					
	ii. Payment of balance 7.5% of the Contract Value limited to Rs. 450 per meter – The payment shall be made to AMISP only when the activities mentioned at 6.2.1(a)(i) are completed within 10 months					
	b. The balance amount of the Contract Value has to be arranged by AMISP which					

	would be reimbursed by PFCCL to AMISP in 30 equal quarterly installments during the Facility Management Services (FMS)/ Operational Period (i.e. after the date of operational acceptance of the entire project).
5.2.11	Deleted
6.1	5% of the Contract Price
6.2	3% of the Contract Price
7.4	Deleted
7.3	A sum equivalent to 1% of the Contract Price
11.5.3 (a)	60%
11.5.3 (b)	100%
11.5.3 (c) i	60%
11.5.3 (c) ii	100%
11.5.4 (a)	10.5%
13.4	PFCCL is operating in New Delhi and Utility is operating in UT of Puducherry
13.5	PFCCL is operating in New Delhi and Utility is operating in UT of Puducherry
14.1	-20% to +30%
19.1	17.01.2022 upto 15:00 hrs
19.2	0.2% of the Contract Price

Annexure I (SCC)

Deleted

Annexure II (SCC)

Deleted

Annexure III (SCC)

Deleted

Appendix A – Project Requirements (AMI System Requirements and Service Level Agreement)

[This Appendix shall include Section 6 of the RFP Document including all amendments/clarification etc. thereto]

Appendix B - AMISP Contract Value

PART III

Contract Related Forms

Section 8. Contract Related Forms

Form No.	Document
1.	Performance Security as per the format prescribed in Form 1
2.	Letter of Award as per the format prescribed in Form 2
3.	Integrity Pact as per the format prescribed in Form 3

Form 1: Format of Performance Security

[To be on non-judicial stamp paper of Rupees One Hundred Only (INR 100/-) or appropriate value as per Stamp Act relevant to place of execution, duly signed on each page.]

Reference No	Bank Guarantee No	Dated:
	То:	
	PFC Consulting Ltd.	
9 th Floor, Statesman House, Bara	khamba Road, Connaught Place, New	Delhi - 110001
	Dear Sir/ Madam,	
address	ne of the Lead Consortium Member/ Solution of the Lead Consortium Member/ Solution (Insert address of the Lead Consortium Member), subsequent to participation dated 03.12.2021 (the "RFP") is "Beneficiary") for Appointment of Advider ("AMISP") for implementation of e-paid mode, have been issued the Lead Bidder was required to incorporate the ish a Performance Security in the formation of the security in the	le Bidder] having m Member/ Sole in Tender No. ssued by PFC vanced Metering f Smart Prepaid atter of Award as AMISP. Further
equivalent] () [Insert a	ee for Rupees	[Insert Contract
Guarantee] having our registered office of the Bank] hereby give Guarantee number] datedagree unequivocally and uncondition Beneficiary any officer authorized	office at	of the registered [Insert Bank tee], and hereby writing from the ceeding Rupees

This agreement shall be valid and binding on this Bank up to and inclusive of
is restricted to Rupees [Insert amount in words equivalent]. Our Guarantee
under this Bank Guarantee are made to us in writing on or before[Insert contract period], all rights of the Beneficiary under this Bank Guarantee shall be forfeited, and we shall be released and discharged from all liabilities there under.
[Insert the address of the Bank with complete postal branch code, telephone and fax numbers, and official round seal of the Bank] [Insert signature of the Bank's Authorized Signatory]
Attested:
[Signature] (Notary Public)
Place: Date:
_

INSTRUCTIONS FOR SUBMITTING BANK GUARANTEE

- 1. Bank Guarantee to be executed on non-judicial stamp paper of appropriate value as per Stamp Act relevant to place of execution.
- 2. The Bank Guarantee by Bidder shall be given from the Scheduled Commercial Banks.

Form 2: Format of Letter of Award

PFCCL shall issue the Letter of Award to the Successful Bidder which would include various terms & conditions of the RfP and the AMISP Contract.

Form 3: Integrity Pact

This pre-bid pre-contract Agreement (hereinafter called the Integrity Pact) is made on
WHEREAS the BUYER proposes to appoint Advanced Metering Infrastructure ("AMI") Service Provider ("AMISP") for implementation of Smart Prepaid Metering in UT of Puducherry and the Bidder/Seller is willing to offer/has offer the same and
Whereas the Bidder is a private company /public company/ Government undertaking/ partnership/ registered export agency, constituted in accordance with the relevant law in the matter and the Buyer is a PSU performing its functions on behalf of its
NOW, THEREFORE, To avoid all forms of corruption by following a system that is fair, transparent and free

from any influence/prejudiced dealings prior to, during and subsequent to the currency of the contract to be entered into with a view to:-

Enabling the Buyer to appoint AMISP for implementation of Smart Prepaid Metering in UT of Puducherry at a competitive price in conformity with the defined specifications by avoiding the high cost and the distortionary impact of corruption on public procurement, and

Enabling BIDDERs to abstain from bribing or indulging in any corrupt practice in order to secure the contract by providing assurance to them that their competitors will also abstain from bribing and other corrupt practices and the BUYER will commit to prevent corruption, in any form, by its officials by following transparent procedures.

The parties hereto hereby agree to enter into this integrity Pact and agree as follows:

Commitments of the Buyer

1.1 The Buyer undertakes that no official of the BUYER, connected directly or indirectly with the contract, will demand, take a promise for or accept, directly or through intermediaries, any bribe, consideration, gift, reward, favour or any material or immaterial benefit or any other advantage from the BIDDER, either for themselves or for any person, organization or third party related to the contract in exchange for an advantage in the bidding process, bid evaluation, contracting or implementation process related to the Contract.

- 1.2 The BUYER will, during the pre-contract stage, treat all BIDDERs alike, and will provide to all BIDDERs the same information and will not provide any such information to any particular BIDDER which could afford an advantage to that particular BIDDER in comparison to other BIDDERs.
- 1.3 All the officials of the BUYER will report to the appropriate Government office any attempted or completed breaches of the above commitments as well as any substantial suspicion of such a breach.
- In case any such preceding misconduct on the part of such official(s) is reported by the BIDDER to the BUYER with full and verifiable facts and the same is *prima facie* found to be correct by the BUYER, necessary disciplinary proceedings, or any other action as deemed fit, including criminal proceedings may be initiated by the BUYER and such a person shall be debarred from further dealings related to the contract process. In such a case while an enquiry is being conducted by the Buyer the proceedings under the contract would not be stalled.

Commitments of Bidders

- 3. The BIDDER commits itself to take all measures necessary to prevent corrupt practices, unfair means and illegal activities during any stage of its bid or during any pre-contract or post-contract stage in order to secure the contract or in furtherance to secure it and in particular commit itself to the following:-
 - 3.1 The Bidder will not offer, directly or through intermediaries, any bribe, gift, consideration, reward, favour, any material or immaterial benefit or other advantage, commission, fees, brokerage or inducement to any official of the BUYER, connected directly or indirectly with the bidding process, or to any person, organization or third party related to the contract in exchange for any advantage in the bidding, evaluation, contracting and implementation of the Contract.
 - 3.2 The Bidder further undertakes that it has not given, offered or promised to give, directly or indirectly any bribe, gift, consideration, reward, favor, any material or immaterial benefit or other advantage, commission, fees, brokerage or inducement to any official of the BUYER or otherwise in procuring the Contract or forbearing to do or having done any act in relation to the obtaining or execution of the contract or any other contract with the Government for showing or forbearing to show favor or disfavor to any person in relation to the contract or any other contract with the Government.
 - 3.3 BIDDERs shall disclose the name and address of agents and representatives and Indian BIDDERs shall disclose their foreign principals or associates.
 - 3.4 BIDDERs shall disclose the payments to be made by them to agents/brokers or any other intermediary, in connection with this bid/contract.

- 3.5 The Bidder further confirms and declares to the Buyer that the Bidder has not engaged any individual or firm or company whether Indian or foreign to intercede, facilitate or in any way to recommend to the Buyer or any of its functionaries, whether officially or unofficially to the award of the contract to the Bidder, nor has any amount been paid, promised or intended to be paid to any such individual, firm or company in respect of any such intercession, facilitation or recommendation.
- 3.6 The Bidder, either while presenting the bid or during pre-contract negotiations or before signing the contract, shall disclose any payments he has made, is committed to or intends to make to officials of the Buyer or their family members, agents, brokers or any other intermediaries in connection with the contract and the details of services agreed upon for such payments.
- 3.7 The Bidder will not collude with other parties interested in the contract to impair the transparency, fairness and progress of the bidding process, bid evaluation, contracting and implementation of the contract.
- 3.8 The Bidder will not accept any advantage in exchange for any corrupt practice, unfair means and illegal activities.
- 3.9 The Bidder shall not use improperly, for purposes of competition or personal gain, or pass on to others, any information provided by the Buyer as part of the business relationship, regarding plans, technical proposals and business details, including information contained in any electronic data carrier. The Bidder also undertakes to exercise due and adequate care lest any such information is divulged.
- 3.10 The Bidder commits to refrain from giving any complaint directly or through any other manner without supporting it with full and verifiable facts.
- 3.11 The Bidder shall not instigate or cause to instigate any third person to commit any of the actions mentioned above.
- 3.12 If the BIDDER or any employee of the BIDDER or any person acting on behalf of the BIDDER, either directly or indirectly, is a relative of any of the officers of the BUYER, or alternatively, if any relative of an officer of the BUYER has financial interest/stake in the BIDDER's firm, the same shall be disclosed by the BIDDER at the time of filling of tender.
 - The term 'relative' for this purpose would be as defined in Section 6 of the Companies Act 1956.
- 3.13 The BIDDER shall not lend to or borrow any money from or enter into any monetary dealings or transactions, directly or indirectly with any employee of the BUYER.

4. Previous Transgression

- 4.1 The Bidder declares that no previous transgression occurred in the last three years immediately before signing of this Integrity Pact, with any other company in any country in respect of any corrupt practices envisaged hereunder or with any Public Sector Enterprise in India or any Government Department in India that could justify bidder's exclusion from the tender process.
- 4.2 The BIDDER agrees that if it makes incorrect statement on this subject, BIDDER can be disqualified from the tender process or the contract, if already awarded, can be terminated for such reason.

5. Bid Security

5.1 While submitting commercial bid, the BIDDER shall submit Bid Security as per Form 6 of the RfP

6. Sanctions for Violations

- 6.1 Any breach of the aforesaid provisions by the Bidder or any one employed by it or acting on its behalf (whether with or without the knowledge of the Bidder) shall entitle the Buyer to take all or any one of the following actions, wherever required:
 - i. To immediately call off the pre-contract negotiations without assigning any reason or giving any compensation to the Bidder. However, the proceedings with the other Bidder(s) would continue.
 - ii. The Earnest Money deposit (in pre-contract stage) and/or Security Deposit/Performance Bond (after the contract is signed) shall stand forfeited either fully or partially, as decided by the Buyer and the Buyer shall not be required to assign any reason therefore.
 - iii. To immediately cancel the contract, if already signed, without giving any compensation to the Bidder.
 - iv. To recover all sums already paid by the Buyer, and in case of an Indian Bidder with interest thereon at 2% higher than the prevailing Prime Lending Rate of State Bank of India, while in case of a Bidder from a country other than India with interest thereon at 2% higher than the LIBOR. If any outstanding payment is due to the BIDDER from the BUYER in connection with any other contract for any other stores, such outstanding payment could also be utilized to recover the aforesaid sum and interest.
 - v. To encash the advance bank guarantee and performance bond/ warranty bond, if furnished by the Bidder, in order to recover the payments, already made by the Buyer, along with interest.
 - vi. To cancel all or any other Contracts with the Bidder. The BIDDER shall be liable to pay compensation for any loss or damage to the BUYER resulting

- from such cancellation/rescission and the BUYER shall be entitled to deduct the amount so payable from the money(s) due to the BIDDER.
- vii. To debar the BIDDER from participating in future bidding processes of the Government of India for a minimum period of five years, which may be further extended at the discretion of the Buyer.
- viii. To recover all sums paid in violation of this Pact by Bidder(s) to any middleman or agent or broker with a view to securing the contract.
- ix. In cases where irrevocable Letters of Credit have been received in respect of any contract signed by the Buyer with the Bidder, the same shall not be opened.
- x. Forfeiture of Performance Bond in case of a decision by the BUYER to forfeit the same without assigning any reason for imposing sanction for violation of this Pact.
- 6.2 The BUYER will be entitled to take all or any of the actions mentioned at para 6.1 (i) to (x) of this Pact also on the Commission by the BIDDER or any one employed by it or acting on its behalf (whether with or without the knowledge of the BIDDER), of an offence as defined in Chapter IX of the Indian Penal code, 1860 or Prevention of Corruption Act, 1988 or any other statute enacted for prevention of corruption.
- The decision of the Buyer to the effect that a breach of the provisions of this Integrity Pact has been committed by the Bidder shall be final and conclusive on the Bidder. However, the Bidder can approach the independent monitor(s) appointed for the purposes of this Pact.

7. Fall Clause

7.1 The Bidder undertakes that it has not supplied/is not supplying similar product/systems or subsystems at a price lower than that offered in the present bid in respect of any other Ministry/ Department of the Government of India or PSU and if it is found at any stage that the similar products/ systems or subsystems was supplied by the Bidder to any other Ministry/ Department of the Government of India or a PSU at a lower price, then that very price, with due allowance for elapsed time, will be applicable to the present case and the difference in the cost would be refunded by the Bidder to the Buyer, if the contract has already been concluded.

8. <u>Independent Monitors</u>

- 8.1 The Buyer has appointed Independent Monitors (hereinafter referred to as Monitors) for this Pact in consultation with the Central Vigilance Commission
- 8.2 The task of the Monitors shall be to review independently and objectively, whether and to what extent the parties comply with the obligations under this Pact.

- 8.3 The monitors shall not be subject to instructions by the representatives of the parties and perform their functions neutrally and independently.
- 8.4 Both the parties accept that the Monitors have the right to access all the documents relating to the project/ procurement, including minutes of meetings.
- 8.5 As soon as the Monitor notices, or has reason to believe, a violation of this Pact, he will so inform the Authority designated by the BUYER.
- 8.6 The BIDDER(s) accepts that the Monitor has the right to access without restriction to all Project documentation of the Buyer including that provided by the BIDDER. The BIDDER will also grant the Monitor, upon his request and demonstration of a valid interest, unrestricted and unconditional access to his project documentation. The same is applicable to Subcontractors. The Monitor shall be under contractual obligation to treat the information and documents of the BIDDER/Subcontractors(s) with confidentiality.
- 8.7 The BUYER will provide to the Monitor Sufficient information about all meetings among the parties related to the Project provided such meetings could have an impact on the contractual relations between the parties. The parties will offer to the Monitor the option to participate in such meetings.
- 8.8 The Monitor will submit a written report to the designated Authority of BUYER/Secretary In the department/ within 8 to 10 weeks from the date of reference or intimation to him by the BUYER/ BIDDER and should the occasion arise, submit proposals for correcting problematic situations.

9. Facilitation of investigation

IN case of any allegation of violation of any provisions of this Pact or payment of commission, the BUYER or its agencies shall be entitled to examine all the documents including the Books of Accounts of the BIDDER and the BIDDER shall provide necessary information and documents in English and shall extend all possible help for the purpose of such examination.

10. Law and Place of Jurisdiction

This Pact is subject to Indian Law. The place of performance and jurisdiction is the seat of the BUYER.

11 Other Legal Actions

The actions stipulated in this Integrity Pact are without prejudice to any other legal action that may follow in accordance with the provisions of the extant law in force relating to any civil or criminal proceedings.

12 **Validity**

- The validity of this Integrity Pact shall be from date of its signing and extend upto 5 years or the complete execution of the contract to the satisfaction of both the BUYER and the BIDDER/ Seller, including warranty period, whichever is later. In case BIDDER is unsuccessful, this integrity Pact shall expire after six months from the date of the signing of the contract.
- Should one or several provisions of this Pact turn out to be invalid; the remainder of this Pact shall remain valid. In this case, the parties will strive, to come to an agreement to their original intentions.

13	The	parties	hereby	sign	this	integrity	Pact	aton
BUYE	BUYER BIDDER							
Name of the officer								
Desig	gnation	1						
PFC	Consu	Iting Ltd.						
Witne	ess 					V 1	Vitnes:	S

^{*}Provisions of these clauses would need to be amended /deleted in line with the policy of the BUYER in regard to involvement of Indian agents of foreign suppliers.